

Fast, high-resolution terahertz radar imaging at 25 meters

Ken B. Cooper*^a, Robert J. Dengler^a, Nuria Llombart^b, Ashit Talukder^a, Anand V. Panangadan^a,
Chris S. Peay^a, Peter H. Siegel^a

^aJet Propulsion Laboratory, California Institute of Technology, 4800 Oak Grove Dr., Pasadena, CA,
USA 91109-8099;

^bUniversidad Complutense de Madrid, Av. Arcos de Jalón 118, 28037 Madrid

ABSTRACT

We report improvements in the scanning speed and standoff range of an ultra-wide bandwidth terahertz (THz) imaging radar for person-borne concealed object detection. Fast beam scanning of the single-transceiver radar is accomplished by rapidly deflecting a flat, light-weight subreflector in a confocal Gregorian optical geometry. With RF back-end improvements also implemented, the radar imaging rate has increased by a factor of about 30 compared to that achieved previously in a 4 m standoff prototype instrument. In addition, a new 100 cm diameter ellipsoidal aluminum reflector yields beam spot diameters of approximately 1 cm over a 50×50 cm field of view at a range of 25 m, although some aberrations are observed that probably arise from misaligned optics. Through-clothes images of a concealed threat at 25 m range, acquired in 5 seconds, are presented, and the impact of reduced signal-to-noise from an even faster frame rate is analyzed. These results inform the system requirements for eventually achieving sub-second or video-rate THz radar imaging.

*ken.b.cooper@jpl.nasa.gov; phone 1 818 354-4371; fax 1 818 393-4683

Keywords: terahertz imaging radar, standoff concealed weapons detection

1. INTRODUCTION

The investigation of THz or submillimeter-wave radiation for person-borne concealed weapons or explosives detection has burgeoned over the last decade as microwave source and detector technology reach ever higher frequencies¹. Three core paradigms of submillimeter-wave sensing are spectroscopic signatures, passive imaging, and active imaging. Wideband THz spectroscopy has shown some promise for eventual standoff detection of explosives², but demonstration of remote THz spectroscopic sensing has not been made yet. Passive thermal sensing in the 100-300 GHz range is the most mature technology, with several companies now offering near-video rate imaging systems³ and with substantial non-commercial development work as well⁴. However, drawbacks of the passive detection approach include an unfavorable tradeoff between threat contrast and image resolution at frequencies exceeding 100 GHz, as well as weak signals from objects concealed by multiple layers of clothing.

These drawbacks can be partially overcome, in principle, by using active imagers at higher frequencies. In an active imager, strong scene illumination can overcome the low contrast of passive detection at higher frequencies, where spatial resolution is the greatest. Penetration through thick clothing can be also accomplished by increasing the transmitting power. Unlike passive detectors, active transceivers will confront no fundamental detection sensitivity limit determined by a scene's thermal background temperature; very high signal-to-noise (SNR) can be achieved given a strong enough illumination source. However, compact solid-state sources can currently only output about ~1 mW up to ~1 THz⁵ giving an upper limit to the radiation's penetrating ability. More importantly, active THz through-clothes imagers, particularly those that rely on coherent illumination and detection, must overcome large signal clutter and speckle caused by a scene with a diversity of angles of incidence, surface roughness, and layers of concealing clothing.

The active THz radar approach being developed at the Jet Propulsion Laboratory (JPL)⁶ and elsewhere^{7,8} addresses the clutter and speckle problem by probing the three-dimensional cross-sectional range profile of a target, rather than just measuring reflectivity contrast in two dimensions, as a conventional active imager might. JPL's initial development of a THz imaging radar led to prototype 0.60 and 0.67 THz systems that used a 40 cm diameter main aperture to focus the

radar beam onto a target at a 4 m standoff range. At this range, the beam’s half-power detection diameter was about 0.5 cm. Images were generated by scanning the beam in a serpentine pattern over a scene using two large-capacity motors that rotated the entire radar platform, including the main reflector and a large portion of the RF electronics, about the azimuth and elevation axes. Typical threat-detection imagery required 150-300 seconds to acquire using this system.

In this paper, we describe the implementation of a second-generation 0.67 THz imaging radar capable of imaging a person’s torso (50×50 cm) in 5 seconds, with 1 cm-scale resolution, at a standoff range of 25 m. This represents an improvement in imaging speed and standoff range by factors of about 30 and 6, respectively. Improving these performance metrics required re-designing the radar’s scanning optics, increasing its main aperture diameter, speeding up its chirp generation hardware, and adding an additional intermediate frequency stage to the signal detection. Based on this effort, we believe that frame rates of 1 Hz or higher for the THz imaging radar will soon be reached using essentially the same architecture described here.

2. SYSTEM DESCRIPTION AND BEAM SCANNING AT 25 M

2.1 Electronic and Optical Architecture

A photograph of the 25 m standoff, 0.67 THz imaging radar is shown in Fig. 1a, along with a simplified electronics block diagram in Fig. 1b and a sketch of the optical geometry for fast beam scanning in Fig. 1c. The radar’s back-end electronics generates a fast 36.8-38.2 GHz chirp signal which is then tripled, amplified, sextupled, and transmitted at 662-688 GHz by the radar’s THz transceiver. The 26 GHz radar bandwidth ensures sub-cm range resolution, and the frequency band was chosen for good image resolution and clothing penetration in a low atmospheric loss window. Transmit and receive duplexing is accomplished with a silicon wafer etalon, with the subharmonic receive mixer being pumped by a chirped local oscillator (LO) to produce an intermediate frequency (IF) signal at a frequency of 3.6 GHz plus a shift proportional to the target range. The front-end radar waveguide blocks are a combination of JPL-built parts (eight 110-115 GHz amplifiers and a 330-345 GHz tripler) and commercial Virginia Diodes Inc. components (two 110-115 GHz triplers, a 660-690 GHz sextupler chain, and a 660-690 GHz subharmonic mixer). After downconversion, the in-phase and quadrature signals are digitized in a 2.8 MHz bandwidth and processed using standard frequency-modulated continuous-wave (FMCW) radar techniques.

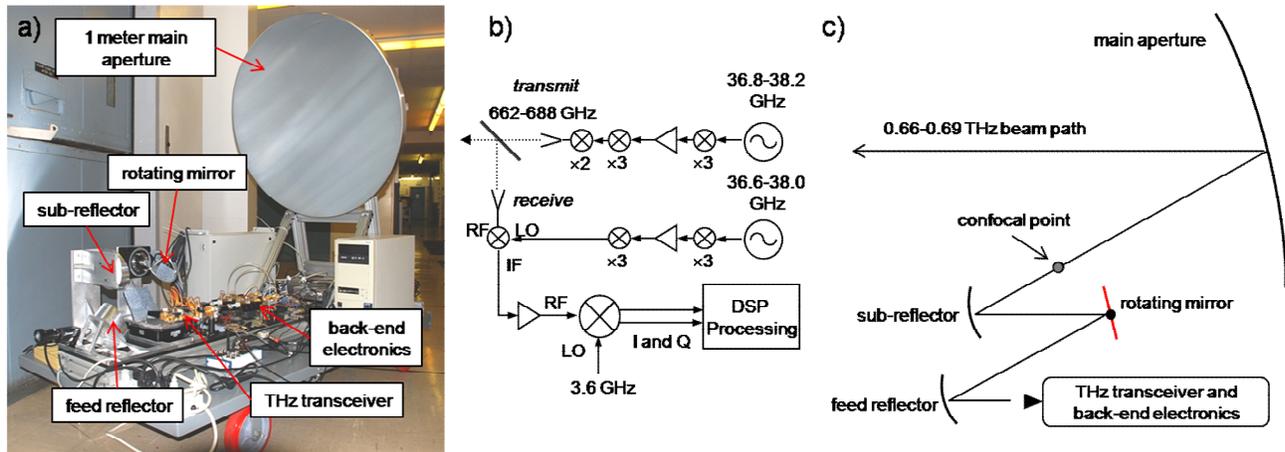


Figure 1: a) Photograph of JPL’s fast-scanning, long-range 0.67 THz imaging radar, including a 1 m diameter ellipsoidal main reflector and a fast-rotating mirror for beam steering. b) Simplified block diagram of the radar’s THz transceiver and electronics. c) Optical geometry for low-distortion scanning.

The imaging radar currently utilizes only a single transceiver because THz heterodyne array technology for a focal plane array has not been developed yet. Therefore, fast imaging requires fast beam scanning and fast signal processing. The confocal Gregorian optical design shown in Fig. 1c was analyzed prior to the 25 m standoff THz radar being built, and that work is described in detail elsewhere⁹. Briefly, the diverging THz beam emitted by the transceiver feed horn is

focused into a parallel ray envelope using a parabolic feed reflector. These rays are then steered by a lightweight, flat two-axis rotating mirror, over typically $\pm 3^\circ$ in elevation and azimuth, before proceeding to a parabolic sub-reflector and then the main aperture. The overall optical magnification reduces this deflection angle for the projected 25 m beam to approximately $\pm 0.5^\circ$. The subreflector shares its focus (confocal point in Fig. 1c) with the near-side focal point of the 1 m diameter ellipsoidal main aperture, whose second focal point is 25 m down range. The aluminum feed and sub-reflectors were diamond-turned by Corning Inc., and the aluminum main reflector was milled by Custom Microwave Inc.

Although having three additional mirrors between the THz feed and the main aperture adds to the system complexity, there is a significant benefit for fast beam scanning. First, the 5 in. flat steering mirror has a small inertia that allows rapid nodding motion. Second, both the main aperture and all the radar electronics components remain stationary during scanning, simplifying the instrument's platform design and avoiding any spurious phase shifts from flexing coaxial cable or waveguide. This is in contrast to our first-generation THz imaging radar, where the front-end electronics and the main aperture were mounted on a single large, rotating platform. And finally, by steering the beam as an envelope of parallel rays, rather than when it is diverging toward the main reflector, optical aberrations are negligible even over the large scan range of typically 40-50 down-range beam widths.

2.2 Beam Scanning Results

As an initial assessment of the THz radar's scanning ability at 25 m standoff range, beam shape measurements were made following the initial installation of the 1 m main aperture. The reflector was hand-positioned using only a ruler, and so far no re-alignment of the optics has been done to optimize the beam shape. Even so, the initial beam shape measurements are very promising, as summarized in Fig. 2. Figure 2a shows a photograph of a beam shape calibration target consisting of a 5×5 grid of 3 mm diameter gold beads suspended in a wooden frame using 4 mil (102 μm) diameter nylon thread. The bead spacing is 12.5 cm so that the entire grid covers a 50×50 cm square.

Fig. 2b shows the reflected radar power of the bead grid, integrated over a range swath of 4 cm around the beads and spanning approximately 60×60 cm in the xy plane. The color scale for Fig. 2b-e, spans 50 dB of dynamic range and is normalized to the maximum power pixel of each image. Each image pixel was acquired using a 0.44 ms FMCW radar chirp. The total image scan time for the 161×153 pixel image of Fig. 2b was 32 seconds, or an average of 1.3 ms per pixel. This is greater than the 0.44 ms chirp time because of the overhead of the scanning mirror's acceleration a , which for this image was maintained at $|a| = 200^\circ/\text{s}^2$. All 25 beads are easily discernable in the radar image, with SNR typically exceeding 30 dB. Interestingly, while the nylon suspension threads are barely visible in Fig. 2b, these threads have the potential to completely dominate the image, with SNRs exceeding 50 dB, if they are aligned to be nearly perpendicular to the beam direction. This large return signal power from wispy nylon thread may be caused by Mie-type resonant scattering, since the thread circumference of 320 μm is comparable to the beam wavelengths of 436-453 μm . This observation, as well as the image of Fig. 2b, is indicative of the high sensitivity of the heterodyne THz detection technique.

To the extent that the 3 mm diameter beads can be treated as point targets compared to the > 1 cm physical beam size at 25 m, the bead shapes of Fig. 2b represent the two-way radar beam pattern. The term "two-way" refers to the square of the conventional antenna intensity, which is appropriate for a radar that transmits and receives using a single antenna with identical Tx and Rx beams. The center bead of Fig. 2b, highlighted by the dashed black circle, indicates that the beam pattern is fairly circular for the nominally undeflected beam. As the beam is displaced up to 25 cm in the x and y directions, the beam shapes appear to gradually become elliptical. Also, there is a vertical asymmetry in the degree of distortion away from the undisplaced beam. This probably means that the system optics are misaligned, or, more problematically but less likely, the aluminum reflectors have too-large surface errors. An attempt will be made to better align the system optics in the future.

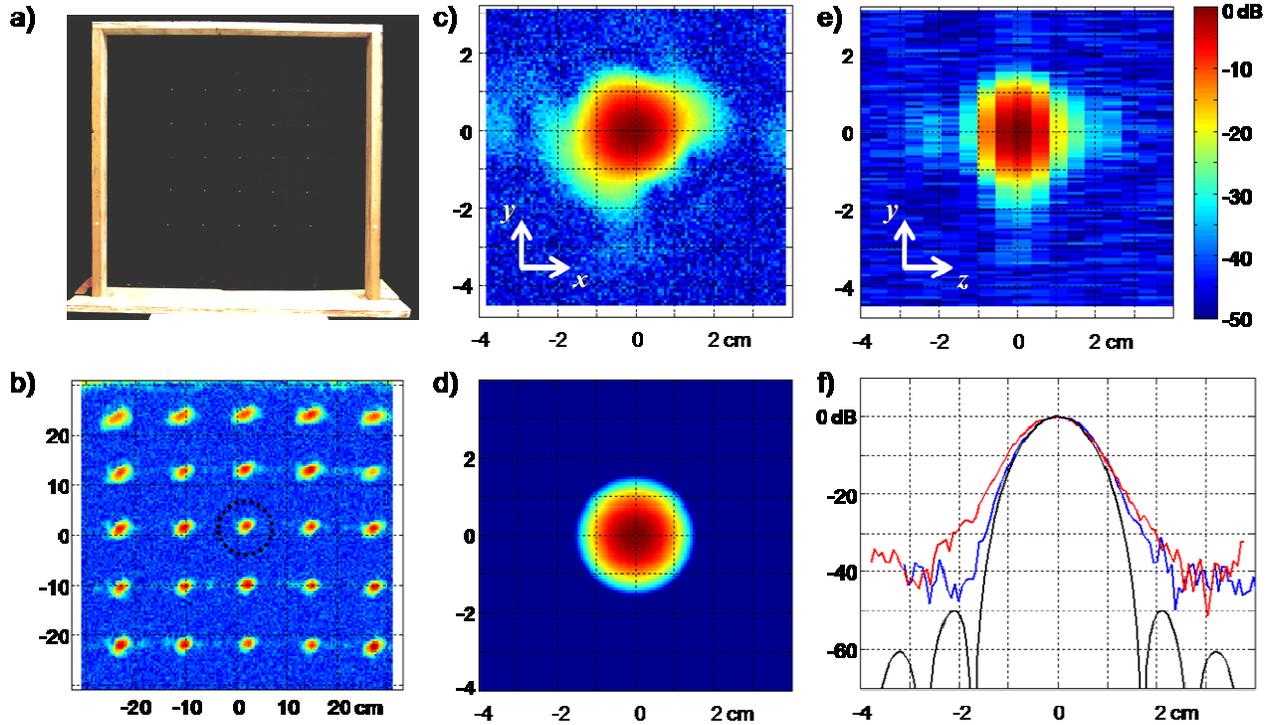


Figure 2: Initial beam shape assessment for the 25 m THz imaging radar. a) Beam shape calibration target, a 5×5 grid of 3 mm diameter gold beads. b) Reflected radar power image of the beads. The outlined bead is analyzed in (c) and (e). c) Fine scan of the center bead power in the xy plane, showing a nearly circular beam pattern with a 1 cm width at the 3 dB point. d) Physical optics simulation of the central beam pattern, assuming a point target and identical Tx/Rx beam shapes. e) The measured bead power in the yz plane, demonstrating sub-cm range resolution. f) Vertical (blue) and horizontal (red) cross-sections of the experimental data in (c), and vertical (black) cross-section of the simulated beam response from (d).

A close analysis of the center bead pattern suggests that the overall optical system is nonetheless quite close to its design. A higher pixel-density reflected power image of this bead, integrating over a 1 cm swath in the z direction, is shown in Fig. 2c. The image reveals a fairly circular shape that compares favorably to the two-way beam pattern of the physical optics simulation, shown below it in Fig. 2d. Vertical and horizontal cross-sections of Fig. 2c are shown in Fig. 2f, along with a vertical cross-section of the simulated beam pattern of Fig. 2d. Fig. 2f indicates that the -3 dB two-way beam width is between 1.0 and 1.1 cm, about 10% larger than the simulated diameter of 0.95 cm. The experimental beam shape also exhibits a shallower roll-off at larger distances from the beam center. Further measurement and analysis will be required to quantify how much these discrepancies are caused by the finite width of the bead target versus misaligned optics. At displacements in x and y of 25 cm, the beam shape becomes elliptical with an increase in the major axis width of typically 30-40%. This is significantly larger than the physical optics simulations showing only a 1% beam width increase at these deflections, indicating the need for further optical alignment.

Finally, Fig. 2e shows the center bead radar response in the yz plane, i.e. where the horizontal distance in the image comes from the FMCW radar range power spectrum mapping detected frequency to time-of-flight, and thus to distance. The coarser pixel spacing visible in the z direction of Fig. 2e is a consequence of the FFT being only 512 points in length, with each spectral bin representing 0.46 cm. This is close to the theoretical range resolution (or peak width) Δz of 0.58 cm, from the standard FMCW radar analysis for a 26 GHz bandwidth chirp signal: $\Delta z = c/2\Delta F$, where c is the speed of light and ΔF is the bandwidth. The -3 dB peak width of Fig. 2e is somewhat less than a single range bin. Taken together, Figs. 2c and 2e represent the three-dimensional resolution, or single-voxel volume, of the THz imaging radar, at the nominal zero-beam-displacement location.

The range resolution is therefore comparable to the cross-range resolution. This is a reasonable engineering goal for THz imaging radars because for through-clothes imagery of concealed weapons, improving the detection resolution along range yields a diminishing return of image quality if the cross-range resolution does not likewise improve, and vice versa. A convenient rule of thumb for estimating the relative values of the two resolutions is that they will be approximately equal when the ratio of the radar aperture diameter to the standoff range is equal to the ratio of the radar bandwidth to the carrier frequency. This follows from the relationship $\Delta z = c/2\Delta F$ and the standard diffraction limited antenna resolution of $\Delta x \approx cR/DF_0$, where R , D , and F_0 are the range, antenna diameter, and carrier wave frequency. In our system, the antenna diameter ratio and the bandwidth ratio are $(1 \text{ m})/(25 \text{ m}) = 0.040$ and $(26 \text{ GHz})/(675 \text{ GHz}) = 0.039$, respectively.

3. FAST IMAGING

3.1 Mirror Motion and Chirp Generation

There are several potential speed bottlenecks that need to be overcome to achieve fast imaging. The major one in the first-generation THz imager was the beam scanning speed. In the current system, however, this is no longer the case because of the use of a lightweight fast-nodding flat mirror described in Section 2.1. This mirror is driven by a RGV100BL precision rotary stage from Newport Corp. Although the manufacturer's specifications indicate a maximum acceleration of $1000^\circ/\text{s}^2$, we have found that this can be exceeded by at least a factor of 15 without significantly affecting the required angular resolution for THz imaging. For a serpentine scan covering $\pm 3^\circ$ in elevation and azimuth (prior to focusing by the main aperture), and with the nodding mirror running at a constant-magnitude angular acceleration a , the total imaging time T will be $T = (24N/a)^{1/2}$, where N is the total number of image pixels (assumed to be equal density in x and y). Typical images contain $N = 70 \times 70 = 4900$, so that for $a = 15,000^\circ/\text{s}^2$, the image time would be $T = 2.8$ seconds.

This scan time is not being currently achieved, however, because the speed bottleneck is now the single-pixel dwell time, t_d , of our FMCW ramp waveform generator. Using a DDS/PLL hybrid synthesizer architecture¹⁰, with a minimum chirp time of about 0.4 ms and some overhead for settling and signal processing, the dwell time is $t_d = 0.5$ ms. For a uniform pixel spacing and a constant nodding mirror acceleration magnitude, the dwell time must be shorter than $t_d \leq T/2N$. Taking $T = 2.8$ s and $N = 4900$, as above, would require $t_d = 0.29$ ms. We are currently developing a faster chirping synthesizer based on a multiplication of a DDS to exceed this goal. In the meantime, for a dwell time of 0.5 ms, a 4900 pixel image requires about 5 seconds to acquire.

3.2 Signal Acquisition and Processing

Other potential frame rate bottlenecks that have not yet been reached are signal acquisition and processing, and the reduction of SNR from ever-shorter chirp times. An experimental analysis of the SNR impact will be done in Section 3. For signal processing, high-speed scanning poses two challenges. One is the ability of software to keep up with the incoming data stream by processing the radar signals, performing image processing, and integrating the threat detection display with a video link. We have found that a fast quad-core processor, running the entire radar imaging routine using LabVIEW software from National Instruments, can readily keep up with real-time imaging demands at the achievable 5 second frame rates.

The second signal processing challenge is that the downconverted IF radar signal frequency f_{IF} increases in proportion to the chirp rate K (in Hz/s) according to $f_{IF} = 2KR/c$. Therefore, care must be taken so that the back-end electronics can accommodate the higher frequency radar signals. A diagram summarizing the detection and processing steps affected by shorter chirp times is shown in Fig. 3. For the THz radar chirp time of 0.44 ms and bandwidth of 26 GHz, the chirp rate is $K = 59 \text{ MHz}/\mu\text{s}$, and targets at 25 m standoff yield a frequency around $f_{IF} = 10 \text{ MHz}$. To simplify and speed up the radar's digital signal processing, an additional downconversion and filtering stage was used to shift the target frequencies within the 2.8 MHz two-sided Nyquist bandwidth of a two-channel (for I and Q) PCI-6132 National Instruments A/D converter. At this lower sampling rate, only about 1200 points per chirp are collected. Subsequent digital downconversion and decimation by a factor of 3 further restricts the effective final detection bandwidth to about 930 kHz and 400 complex samples per chirp. With a chirp time of 0.44 ms, the resulting spectral resolution of the signal is $\Delta bw = 1/(0.44 \text{ ms}) = 2.3 \text{ kHz}$. This spectral resolution defines the radar's range resolution, according to $\Delta r = c\Delta bw/2K = 0.58 \text{ cm}$, and so for a 400-point sample the detectable range swath, or depth of focus, is $400 \times 0.58 \text{ cm} = 2.3 \text{ m}$. In other words, targets outside a 2.3 m window at 25 m standoff will not be detected by the radar. This is a tolerable compromise to make because the Gaussian optics of beam propagation yield a comparable usable range swath: at a

distance of ± 1.15 m from the focal point, the beam diameter increases by about 60%. The 400-point time-domain sample is compensated for chirp nonlinearity¹¹, zero-padded to 512 points, and then processed via fast Fourier transform (FFT) to yield a range-compressed FMCW radar spectrum. Shortening the chirp time further to achieve faster frame rates will require either a proportionally higher detection bandwidth, or a reduced depth of focus. The best approach for handling higher chirp speeds is probably increasing the detection bandwidth, since A/D converters at 50 MHz or higher, with a large bit depth, are now readily available, and any further reduction in the radar depth of focus would compromise the instrument’s flexibility.

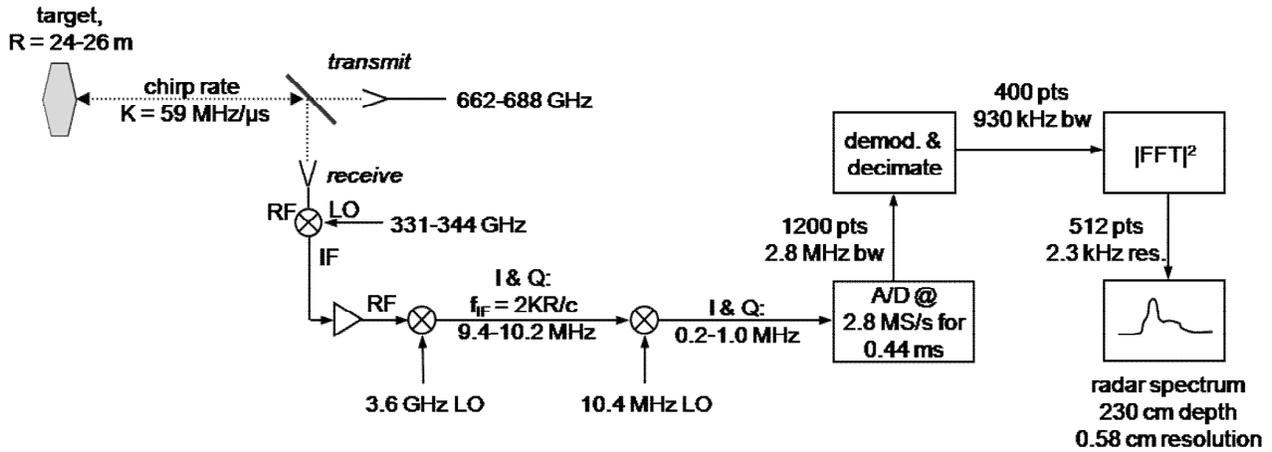


Figure 3: Simplified THz radar signal processing diagram showing key steps that are affected by higher chirp rates. Following the 3.6 GHz downconversion step, the IF frequency spanning 9.4-10.2 MHz is proportional to the chirp rate of 59 MHz/ μ s. Increasing the chirp rate to achieve faster imaging rates will affect the bandwidth and signal processing requirements of the subsequent radar processing steps, which in this case yield a final range spectrum of 512 points, covering a 230 cm depth of focus with 0.58 cm resolution.

3.3 Threat Detection Results and SNR Limits

The essential signal and image processing steps to generating through-clothes imagery have remained unchanged since the first-generation imager⁵. The procedure involves peak-finding of the radar spectrum obtained for each image pixel, and then reconstructing a “back-surface” topography using the locus of peaks that are at the longest ranges. In other words, the back-surface is the surface that is last encountered by the THz radar beam. This approach is effective because the body, as well as most bulk solid materials that would comprise an explosive device – whether they be metallic or not – are all virtually opaque at the < 0.5 mW beam powers that the radar employs. (The power density employed is also far below any recognized health hazard threshold.)

Figure 4a provides an example of fast through-clothes threat detection at 25 m standoff range using the back-surface radar imaging technique. The threat in this case is a mock pipe bomb, consisting of a pair of nail-shrouded foot-long PVC pipes with an overall diameter of about 1.75 in, as shown in Fig. 4a. The mock explosive device concealed on a torso by a fleece jacket, as well as the 69 \times 65 pixel back-surface image spanning about 38 \times 38 cm and acquired in 5 seconds, are also shown in Fig. 4a. The radar chirp time for these data was 0.44 ms, and the fast-rotating mirror’s acceleration magnitude was 3,600^o/s², spanning $\pm 2.5^{\circ}$. Despite operating with somewhat broadened beam profiles, as described in Section 2.2, the THz imaging radar can easily detect the bulge from the concealed pipes. In this way, the THz radar has an ability to perform a *standoff pat-down* on a person to detect solid objects underneath clothing.

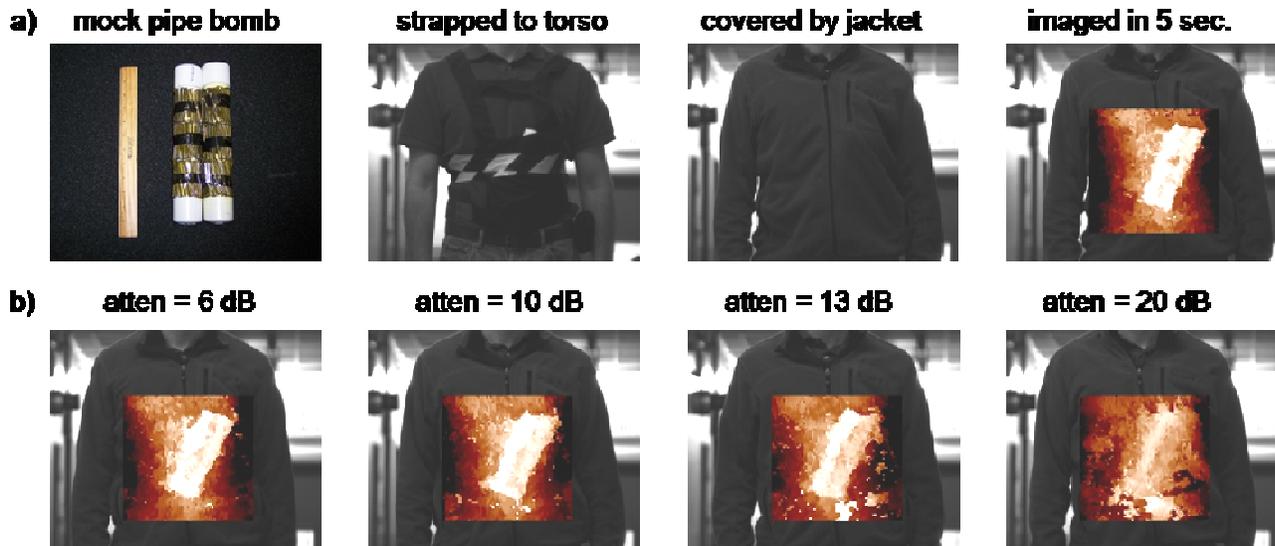


Figure 4: a) Target scenario and back-surface image overlay for through-jacket detection of a mock pipe bomb. The THz radar image was acquired in 5 seconds at a standoff range of 25 m. b) Back-surface image overlays obtained with four levels of signal attenuation to mimic the lower SNR that would result from faster scans. Fair detection quality at 10 dB attenuation implies that 2 Hz frame rates will be possible using a single-transceiver THz radar.

The 5 second imaging time for Fig. 4a was limited by the minimum attainable chirp time, as explained in Section 3.1, and it is unacceptably long for real-world applications. Not only would a target need to stand in one place during the imaging time so as not to exit the radar's field of view, but motion exceeding about 1 cm during image capture, in any direction, would cause blurring in the final image. This leads to the question: As chirp times are shortened with better RF circuitry and beam scanning is made faster with more powerful motors or more elegant optical geometries, what are the remaining limits to the imaging speed? One important one is set by the SNR level of the radar. Because of the coherent detection technique, SNR of a single-pixel acquisition is proportional to the signal integration time, which is the same as the waveform chirp duration. The individual radar spectra used to generate Fig. 4a exhibit SNRs spanning about 25-45 dB, with the stronger signals primarily occurring in locations where on the angle of incidence between the beam and the target are nearly normal. This implies that the imaging speed can be increased by perhaps 15 dB (to 0.15 sec) without being SNR-limited, if 10 dB SNR is taken as the nominal minimum detection threshold.

To investigate this more quantitatively, a series of four additional images from the same scene were obtained with additional attenuation placed in the downconverted (3.6 GHz) radar signal path between the submillimeter-wave receiver mixer and the 3.6 GHz low-noise IF amplifier. The attenuations used were 6, 10, 13, and 20 dB, and the resulting images are shown in Fig. 4b. Extrapolating the linear relationship between the attenuator values, SNR, and an effective integration time, the images of Fig. 4b represent what the radar imagery *would* look like if the capture time were shortened to be 1.25, 0.5, 0.25, and 0.05 s. As this *effective* imaging time is reduced, the radar's ability to detect and distinguish between the front- and back-surface target layers gradually degrades, with a poor but discernable detection ability at an effective 0.25 sec. imaging time (13 dB), and virtually no through-clothes detection at an effective 50 ms image time (20 dB). However, the threat contrast is still quite good at 10 dB attenuation, corresponding to an effective imaging time of 0.5 s.

Thus we can conclude that the THz radar imager at 25 m standoff, and with a 1 m aperture, might be able to attain 2 Hz frame rates without any change in the front-end THz electronics. The system improvements needed to achieve this would be a faster-rotating subreflector, a wider bandwidth detector, and a faster microwave chirper. To reach even faster frame rates, either substantial innovation will be required to develop a higher-power, coherent, and compact THz source, and thus increase the SNR, or a means must be developed to simultaneously transmit and receive multiple radar beams on a target. While heterodyne array technology at THz frequencies is a substantial challenge, the above analysis indicates that only 2-5 transceivers would be required to achieve THz radar frame rates of 4-10 Hz, or perhaps half that

number if beam multiplexing approaches are pursued¹². At these near-video frame rates, the THz imaging radar may after all find a role in real-world threat detection applications.

4. CONCLUSIONS

Early results from JPL's second-generation THz imaging radar were presented, including effective concealed threat detection in 5 seconds at 25 m standoff range. This 0.2 Hz imaging rate is an improvement over the first-generation system by more than an order of magnitude, and its range was extended from 4 to 25 m. This was made possible by a new beam scanning mechanism and optical geometry, a fast microwave chirper, and streamlined signal processing. These subsystems can be further optimized for higher speed and superior beam profile quality. To assess more fundamental limits of the THz imaging radar speed, measurements with purposefully degraded SNR were also performed. These provided evidence that >1 Hz frame rates will be possible with a single THz transceiver, and there is a potential for even higher imaging rates using a few-element THz heterodyne array.

5. CONCLUSIONS

The work was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with United States Naval Explosive Ordnance Disposal Technology Division.

REFERENCES

- [1] R. Appleby and H.B. Wallace, "Standoff Detection of Weapons and Contraband in the 100 GHz to 1 THz Region," *IEEE Trans. on Ant. and Prop.* 55, 2944-2956 (2007).
- [2] H. B. Liu, Y. Chen, G. J. Bastiaans, and X.-C. Zhang, "Detection and identification of explosive RDX by THz reflection spectroscopy," *Opt. Express* 14, 415-423 (2006).
- [3] For example, see Thruvision Systems Ltd., Brijot Imaging Systems Inc., Sago Systems Inc., and Millivision Corp.
- [4] A. Luukanen, P. Helistö, P. Lappalainen, M. Leivo, A. Rautiainen, H. Toivanen, H. Seppä, Z. Taylor, C.R. Dietlein, and E.N. Grossman, "Stand-off passive THz imaging at 8-meter stand-off distance: results from a 64-channel real-time imager," *Proc. SPIE* 7309, 73090F (2009).
- [5] A. Maestrini, J.S. Ward, J.J. Gill, C. Lee, B. Thomas, R.H. Lin, G. Chattopadhyay, and I. Mehdi, "A Frequency-Multiplied Source with more than 1 mW of Power across the 840-900 GHz Band", to be published *IEEE Trans. on Microwave Theory and Techniques* (2010).
- [6] K. B. Cooper, R. J. Dengler, N. Llombart, T. Bryllert, G. Chattopadhyay, E. Schlecht, J. Gill, C. Lee, A. Skalare, I. Mehdi, P. H. Siegel, "Penetrating 3D Imaging at 4 and 25 Meter Range Using a Submillimeter-Wave Radar", *IEEE Trans. Microw. Theory Tech.* 56, 2771-2778, (2008).
- [7] C. am Weg, W. von Spiegel, R. Henneberger, R. Zimmermann, T. Loeffler, and H.G. Roskos, "Fast Active THz Cameras with Ranging Capabilities," *Journal of Infrared, Millimeter, and Terahertz Waves* 30(12), 1281-1296 (2009).
- [8] D.M. Sheen, T.E. Hall, R.H. Severtsen, D.L. McMakin, B.K. Hatchell, and P.L.J. Valdez, "Active wideband 350GHz imaging system for concealed-weapon detection," *Proc. SPIE* 7309, 73090I (2009).
- [9] N. Llombart, K.B. Cooper, R.J. Dengler, T. Bryllert, and P.H. Siegel, "Confocal Ellipsoidal Reflector System for a Mechanically Scanned Active Terahertz Imager," to be published in *IEEE Trans. on Ant. and Prop.* (2010).
- [10] R. J. Dengler, K. B. Cooper, N. Llombart, G. Chattopadhyay, T. Bryllert, I. Mehdi, and P. H. Siegel, "Toward Real-time Penetrating Imaging Radar at 670 GHz," 2009 *IEEE MTT-S Intl. Microwave Symp. Digest*, 941-944 (2009).
- [11] R.J. Dengler, K.B. Cooper, G. Chattopadhyay, I. Mehdi, E. Schlecht, A. Skalare, C. Chen, and P.H. Siegel, "600 GHz Imaging Radar with 2 cm Range Resolution," 2007 *IEEE MTT-S Intl. Microwave Symp. Digest*, 1371-1374 (2007).
- [12] N. Llombart, K.B. Cooper, R.J. Dengler, T. Bryllert, G. Chattopadhyay, and P.H. Siegel, "Time Delay Multiplexing of Two Beams in a THz Imaging Radar," submitted for publication.