

Characterization and Compensation of the Atmosphere for the inversion of AVIRIS Calibrated Radiance to Apparent Surface Reflectance

Robert O. Green¹, Dar A. Roberts² and James E. Conel¹

¹Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA 91109

²University California, Santa Barbara, CA 93106

ABSTRACT

Calibrated radiance spectra measured remotely, record the integrated effects of the solar source, the atmosphere and the surface. To pursue scientific research and applications, based on the molecular absorption and constituent scattering properties of the surface, the solar source and atmosphere must be characterized and compensated in the spectra. This paper describes a set of radiative transfer spectral fitting algorithms to characterize the absorbing and scattering constituents of the atmosphere from calibrated AVIRIS spectra. These atmospheric characteristics were used in conjunction with the illumination and observation geometries to invert the AVIRIS calibrated radiance spectra to apparent surface reflectance. A validation of the algorithm was performed with in-situ reflectance spectra acquired at the time of the AVIRIS over-flight over Pasadena California in 1994.

INTRODUCTION

Remotely measured data from satellites and aircraft are essential to support the measurement and monitoring of Earth surface processes over a range of spatial and temporal scales. In the solar reflected portion of the spectrum the data acquired at the sensor record the integrated effects of the solar source, the atmosphere and the surface. A set of algorithms was developed to characterize and compensate for the atmospheric effects in the calibrated spectra acquired by AVIRIS. AVIRIS measures the solar reflected spectrum from 400 to 2500 nm at 10 nm intervals from 20 km altitude in the Q-bay of a NASA ER-2 aircraft. These spectra are acquired as images of 11 by up to 100 km with 20 by 20 m spatial resolution. AVIRIS is calibrated in the laboratory (Chrien 1990, 1996) and the calibration is validated in flight (Conelet et al., 1988; Green et al., 1988, 1990, 1992, 1993, 1995, 1996).

Algorithms were developed to characterize the water vapor, well-mixed gases, molecular scattering and aerosol scattering from calibrated spectra, acquired by AVIRIS. The atmospheric characteristics were used to invert the AVIRIS measured radiance to apparent surface reflectance. These algorithms rely on the atmospheric models of the MODTRAN3 radiative transfer code (Kneizys, 1987; Berk, 1989; Anderson, 1995). MODTRAN3 was used in conjunction with the downhill simplex nonlinear spectral fitting algorithm, (Press 1986) to invert for the atmosphere characteristics. The comparison of MODTRAN3 and AVIRIS spectra from the 1994 in-flight calibration experiment was used to link the calibration AVIRIS to MODTRAN. This paper describes the application and validation of these algorithms to an AVIRIS data set acquired over Pasadena, California.

MEASUREMENTS

AVIRIS measured a data set of the total spectral upwelling radiance over the Pasadena, California region at 18.55 UTC on the 11th of April 1994. The latitude and longitude of the Rose Bowl contained in the data set is 34.16° latitude and -118.33° longitude. Figure 1 shows a single wavelength image from the AVIRIS data set. The Jet Propulsion Laboratory is in the center left of the image and the Rose Bowl is located at the lower left. Mount Wilson is located

at the upper center of the image. An AVIRIS radiance spectrum from the Rose Bowl parking lot and adjacent grass field is shown in Figure 2. At the time of the AVIRIS over-flight, surface spectra reflectance measurements were acquired in the Rose Bowl parking lot and adjacent grass field. These are shown in Figure 3. Comparison of the AVIRIS measured radiance and in-situ reflectance measurements shows the effect of the solar source and atmosphere in the total upwelling spectra radiance measured by AVIRIS.

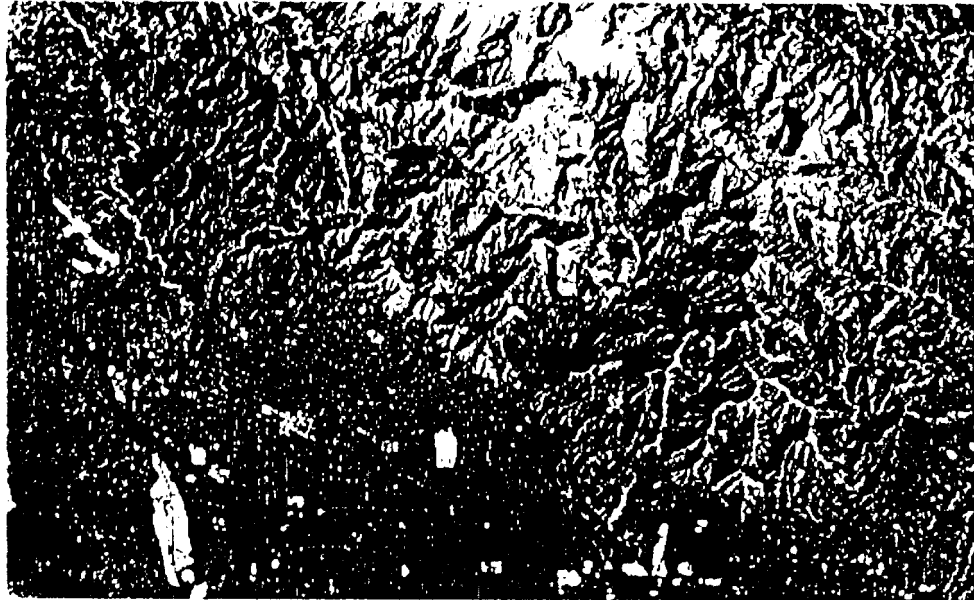


Figure 1. April 11, 1994 AVIRIS image of Pasadena, California.

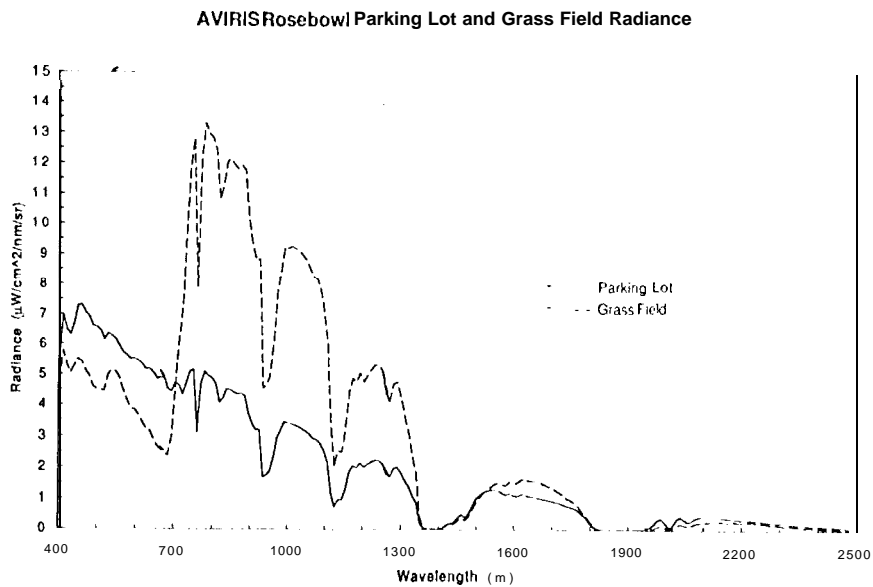


Figure 2. AVIRIS spectra of the total upwelling radiance for the Rose Bowl parking lot and adjacent grass field.

Rose Bowl Parking Lot & Grass Field Reflectance 940413

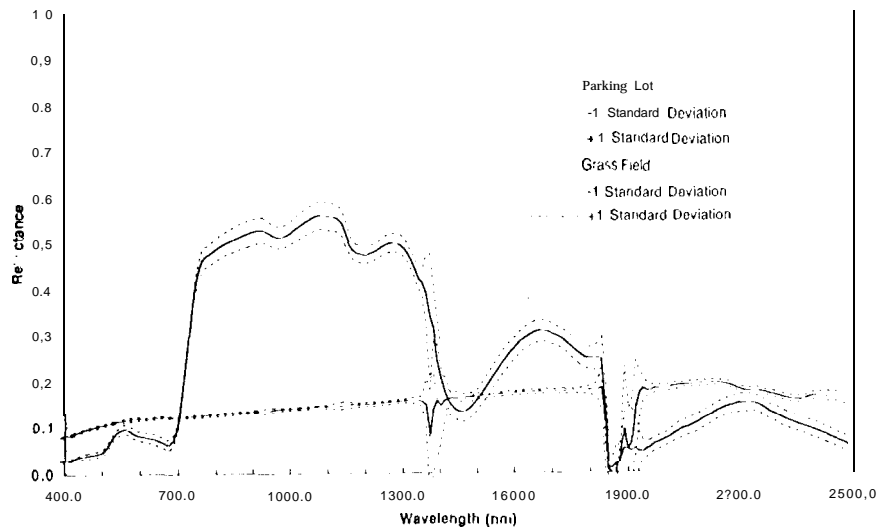


Figure 3. In-situ measured surface reflectance at the Rose Bowl at the time of the AVIRIS over-flight.

ANALYSIS

AVIRIS calibration

in 1994 the AVIRIS in-flight calibration experiment (Green et al., 1995), a comparison of MODTRAN3 predicted radiance and AVIRIS measured radiance showed AVIRIS to be calibrated at better than 95%. However, in detail the residual 5% disagreement is spectrally featureful as shown in Figure 4. These spectral differences were attributed to errors in the MODTRAN3 model of the atmosphere. The ratio of AVIRIS to MODTRAN3 was used as an additional calibration factor to compensate for these errors. In addition, the AVIRIS sensor performance changed slightly from the time of the calibration experiment and the time of the Pasadena data acquisition. This variation in performance is shown in Figure 5 and was used to calibrate AVIRIS performance to that of the in-flight calibration experiment.

AVIRIS to MODTRAN Correction for 940405 Calibration Experiment

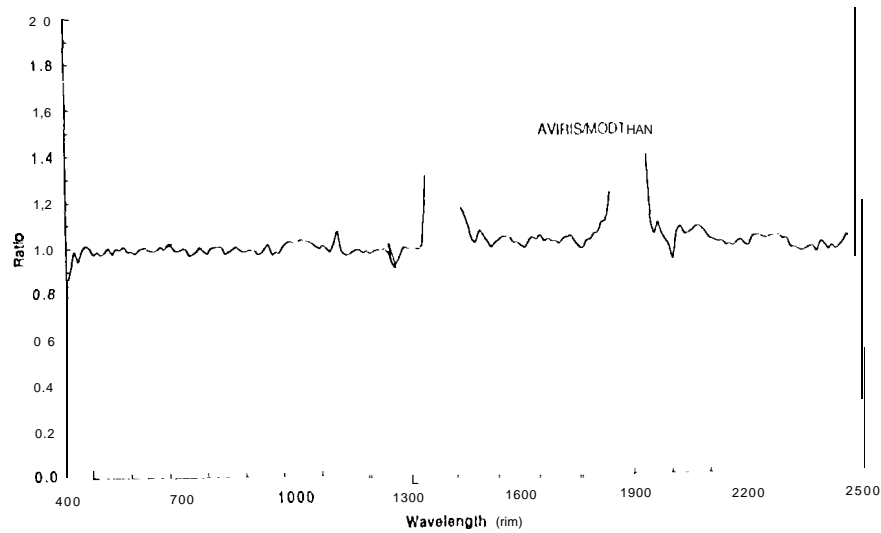


Figure 4. Calibration ratio between AVIRIS and MODTRAN3 derived from the inflight calibration experiment on the 4th of April 1994.

On-Board Calibrator Correction From Calibration Experiment

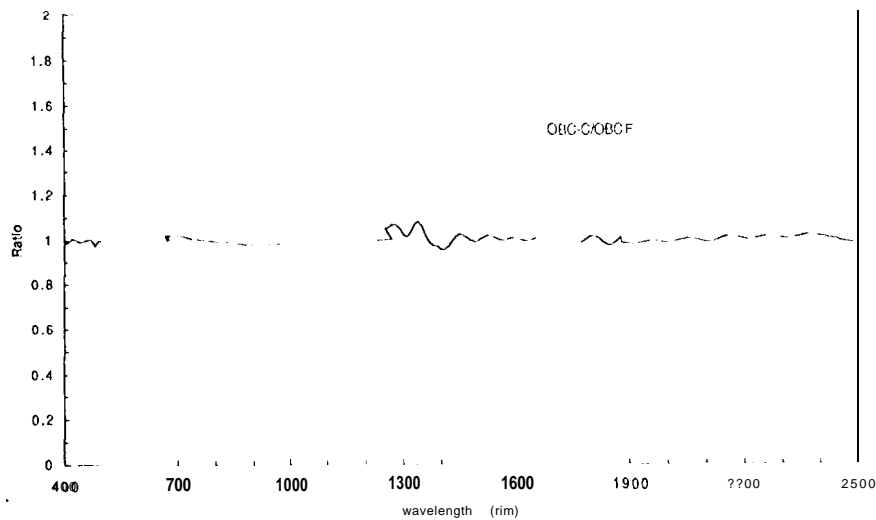


Figure 5. Calibration ratio of the on-board calibrator signal for the Pasadena flight to the signal for the inflight calibration experiment.

Surface Pressure and Height

The radiance measured by AVIRIS is affected by the absorption and scattering due to the well-mixed gases of the atmosphere (e. g., carbon dioxide and oxygen). τ_{0} characterize the well-mixed atmospheric gases and the effect of atmospheric molecular scattering, an algorithm was developed to estimate the surface pressure elevation from the AVIRIS measured radiance. This algorithm assesses the strength of the 760 nm oxygen absorption band measured in the AVIRIS spectrum (Green et al, 1991; Green et al, 1993). The oxygen band strength is calibrated to

surface pressure elevation using the oxygen band model in the MODTRAN3 radiative transfer code. Figure 6 shows the AVIRIS derived image of surface pressured height for the Pasadena data set. Pressure heights range from 50 to 1900 m and correspond generally to the topographic elevation. The sensitivity of AVIRIS to the oxygen pressure height is moderate. To enhance the AVIRIS precision a 5 by 5 spatial sample average was used. The resulting precision is estimated at 200 m.

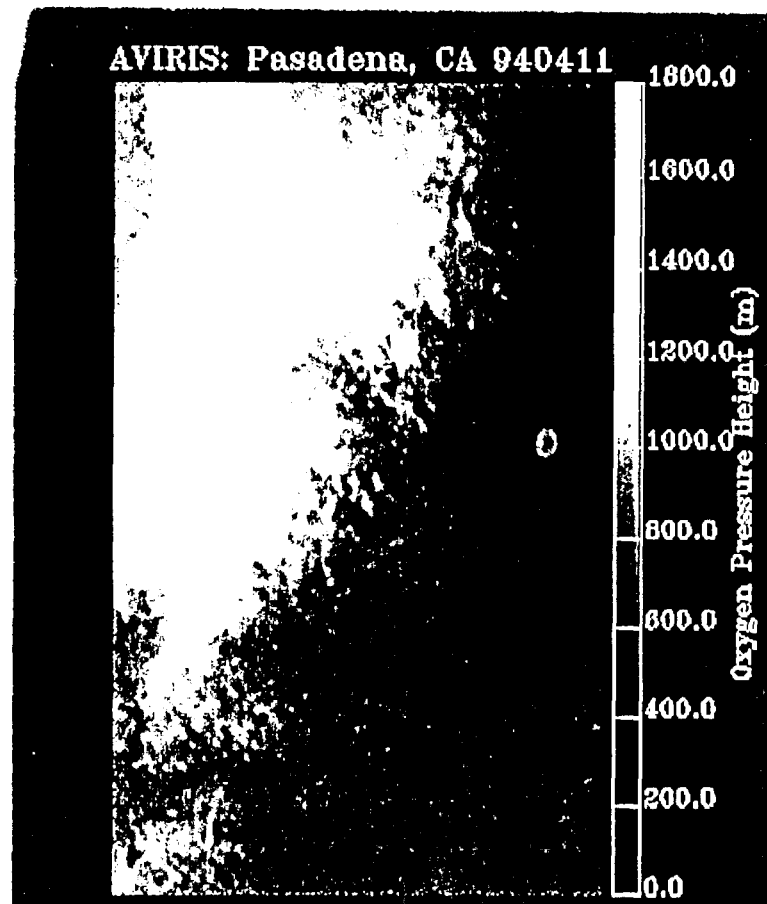


Figure 6. AVIRIS derived surface pressure height for Pasadena data set

Aerosol Optical Depth

The spectral radiance incident at AVIRIS is effected by scattering in the atmosphere due to aerosols. The effect of aerosol scattering is strong in the 400 to 700 nm region and increases towards shorter wavelengths. A nonlinear least square spectral fitting algorithm was developed to estimate the aerosol optical depth directly from the AVIRIS measured radiance. This algorithm optimizes the fit between the, AVIRIS radiance and a MODTRAN3 modeled radiance with the aerosol optical depth as the primary fitting parameter. A MODTRAN3 model atmosphere must be initially selected. Parameters describing the reflectance magnitude, reflectance spectral slope and the leaf chlorophyll absorption were included. Surface pressure height is used as a constraint. The algorithm was applied to the Pasadena AVIRIS data set using the MODTRAN3 urban atmospheric model. Figure 7 shows the spectral fit and derived aerosol scattering presented as visibility in km for the Rose Bowl parking lot. Figure 8 shows the aerosol visibility for the AVIRIS Pasadena data set. To improve the uniformity of the estimated

aerosol effect, the data were averaged over 11 by 11 spatial elements. Derived visibility ranged from 40 to 140. The trend of greater visibility at high elevations and less visibility at lower elevations is consistent with the expected distribution of aerosols in the Pasadena region.

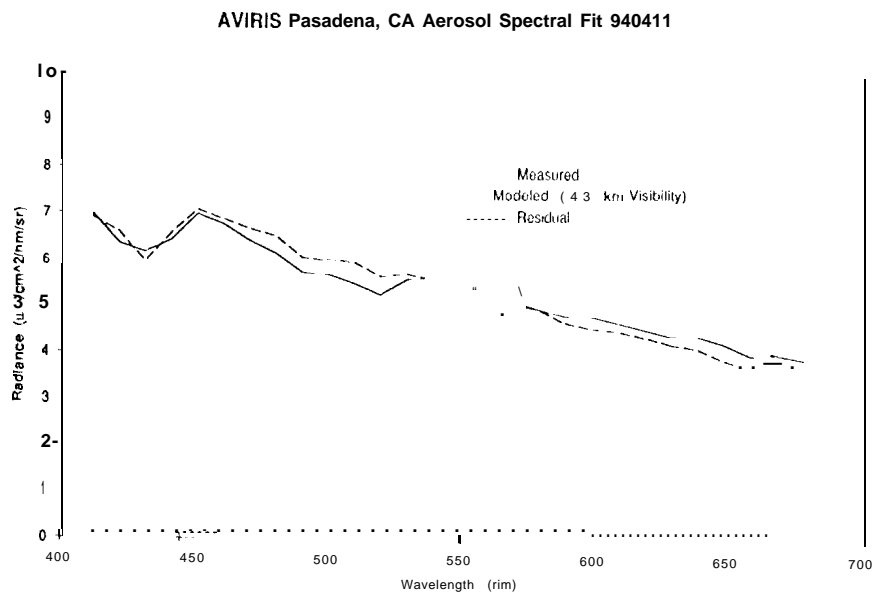


Figure 7. Spectral fit for aerosols at the Rose Bowl parking lot.

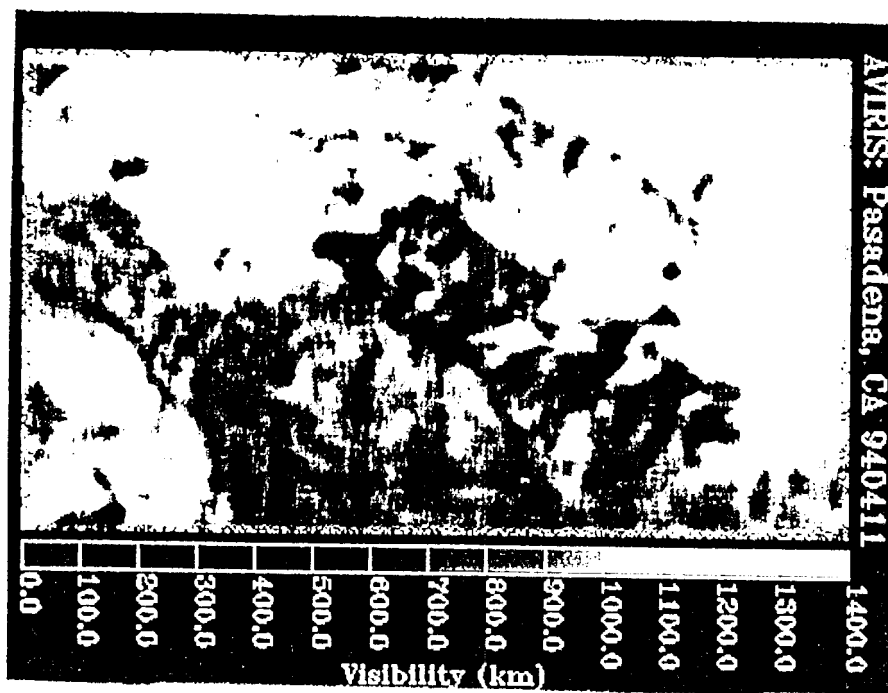


Figure 8. image of derived aerosol expressed visibility for the MODTRAN3 urban aerosol atmospheric model.

Water Vapor

Across the AVIRIS spectral range the strongest atmospheric absorber is water vapor. The effect on the upwelling radiance arriving at AVIRIS is shown in Figure 9 as the atmosphere varies from 0 to more 36.5 precipitable mm of water vapor. In addition to absorbing strongly, water vapor in the terrestrial atmosphere varies both spatially and temporally (Green et al., 1991, Green et al., 1995).

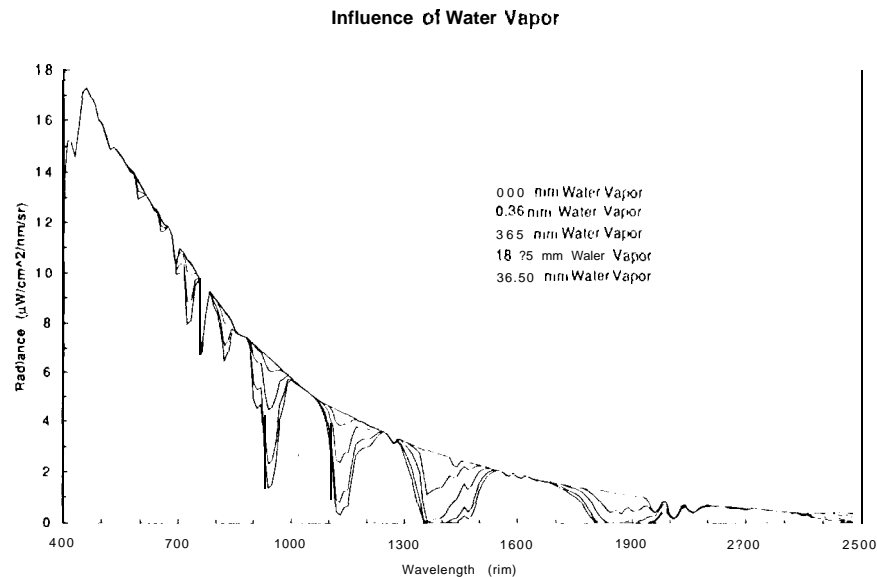


Figure 9. Influence of water vapor to the upwelling spectral radiance measured by AVIRIS.

To compensate for water vapor absorption in AVIRIS spectra, a determination of total path water vapor is required for each spatial element. Water vapor algorithms for AVIRIS 1 have been developed (Conel et al 1988, Green et al 1989, 1991a, 1995) based initially on the LOWTRAN (Kneizys et al., 1987) and currently on the MODTRAN3 (Berk et al., 1989, Anderson et al., 1995) radiative transfer code. Alternate approaches for characterization of the atmospheric water vapor have been pursued (Gao and Goetz, 1990).

The water vapor algorithm used here fits the AVIRIS measured radiance for the 940 nm water band to a radiance spectrum MODTRAN3. In addition to a parameter controlling water vapor, the spectral fit includes a three parameter surface reflectance model with leaf water. Inclusion of leaf water absorption is essential to achieve good fits over vegetated surfaces. This algorithm was applied to the AVIRIS Pasadena data set. Figure 10 and 11 show the fits for the Rose Bowl and Mount Wilson spectra respectively. Values of 9.87 and 3.42 mm were derived. The water vapor image for the entire data set is shown in Figure 12. Total column water vapor amounts were derived from 3.19 to 10.22 across the Pasadena image. The changes in the atmospheric path length due to elevation are strongly expressed in this result.

AVIRIS Water Vapor SpectralFitRosebowl Parking Lot 940411

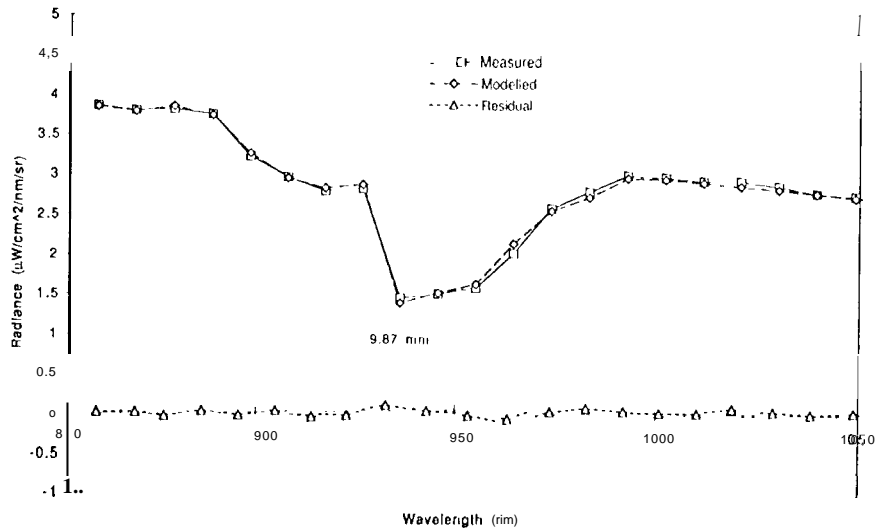


Figure 10. AVIRIS water vapor spectral fit for the Rose Bowl parking lot.

AVIRIS Water Vapor SpectralFit Mount Wilson 940411

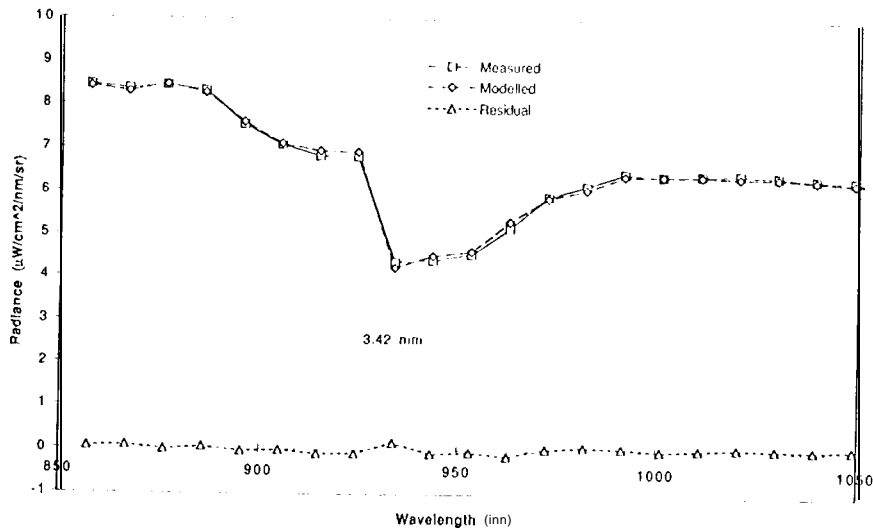


Figure 11. Water vapor spectral fit at Mount Wilson.

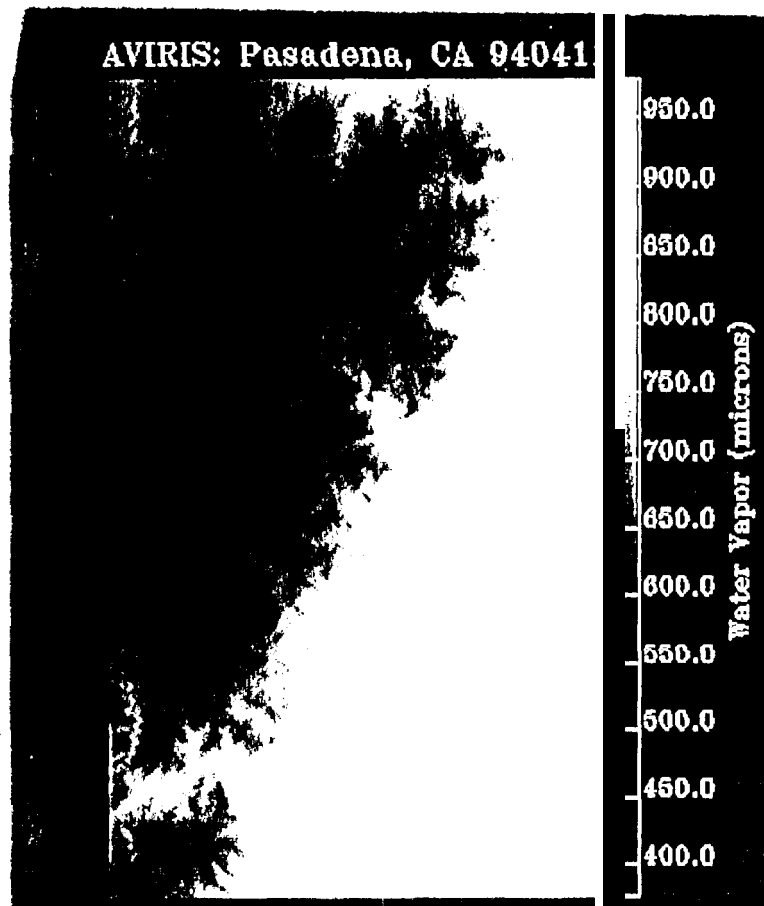


Figure 12. Water vapor image of Pasadena region from AVIRIS.

Radiance to Reflectance inversion

Calculation of surface spectral reflectance from the total upwelling radiance measured by AVIRIS using a radiative transfer code has been pursued since the flights of AVIRIS in 1989 (Green, et al. 1990, Green, et al. 1991, Green et al. 1992; Green et al. 1993). A related method for radiance to reflectance inversion (Gao et al. 1992) was pursued with AVIRIS data. In direct comparisons (Clark et al. 1995) the MODTRAN based algorithm showed superior results.

The total upwelling spectral radiance at the top of the atmosphere, in the observation direction may be expressed in terms of the solar illumination of a lambertian reflectance surface (Chandrasekhar, 1960). For a given illumination and observation geometry as well as atmospheric absorption and scattering characteristics, this relationship is given as:

$$I_{\uparrow} = I_0 r_a / p + I_0 T_d r_g T_u / p / (1 - S r_g) \quad (1)$$

I_{\uparrow} is the total upwelling spectral incident at AVIRIS. I_0 is the exoatmospheric solar irradiance. r_a is the atmospheric reflectance. T_d is the downward direct and diffuse transmittance of the atmosphere. r_g is the apparent lambertian surface reflectance. T_u is the upward total atmospheric transmittance to the AVIRIS. S is the albedo of the atmosphere above the surface.

This equation may be solved for r_g

$$r_g = 1 / [\{ (F_0 T_d T_u / p) / (1 - F_0 r_a / p) \} + S1] \quad (2)$$

Using the water vapor, pressure elevation and aerosol optical depth estimations derived in the algorithms described, the two-way Transmitted radiance and atmospheric reflectance were calculated for each spatial element with MODTRAN3. A recent compilation of the exoatmospheric solar irradiance was used (Gao and Green 1995). Computers look up tables that were used to accelerate MODTRAN3 calculations. With these determined parameters the surface reflectance is calculated as shown in Equation 2. Figure 13 shows a comparison of the AVIRIS derived reflectance for the Rose Bowl parking lot and adjacent grass field. The solar source and atmospheric effects present in the measured upwelling spectral radiance are compensated with this algorithm. Also shown are in-situ reflectance measurement acquired of these surfaces 3 days after the AVIRIS flight. The effects of The average agreement between the derived and measured reflectance is 5.6 and 9.4 for the parking lot and grass field respectively.

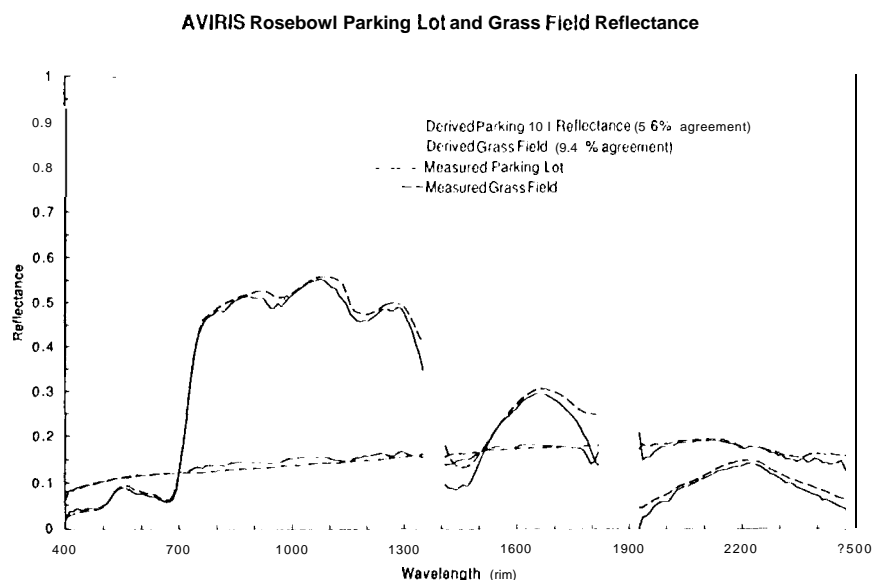


Figure 13. Inversion results for AVIRIS radiance to apparent surface reflectance for the Rose Bowl parking lot and adjacent grass field.

CONCLUSION

Algorithms were developed and used to characterize the surface pressure height, aerosol scattering and atmospheric water vapor from calibrated AVIRIS spectra. The algorithms used in the MODTRAN3 radiative transfer code model of the atmospheric absorption and scattering coupled with a nonlinear least square fitting algorithm. AVIRIS calibration was augmented to account for the current residual disagreement between AVIRIS anti MODTRAN3 measured and modeled radiance based on an in-flight calibration experiment. These algorithms were applied to a data set acquired over Pasadena, California on the 11th of April 1994. An equation relating the apparent surface reflectance, to the total upwelling spectral radiance for a given atmosphere and illumination geometry was described. This equation was constrained by inputs of the derived

atmospheric absorption and scattering characteristics to MODTRAN3. Apparent surface reflectance was derived for the complete AVIRIS data set. Solar source and atmospheric effects were compensated in the derived apparent reflectance spectra. At the Rose Bowl parking lot and adjacent grass field, the derived apparent reflectance was compared with in-situ measurements. An agreement of 5.6 and 9.4 was shown providing an end-to-end validation of the algorithm. Physically based derivation of the apparent surface spectra] reflectance from calibrated upwelling radiance using only the spectra themselves is essential for research and application based on absorption and scattering characteristics of the surface.

REFERENCES

Berk, a., I.S. Bernstein, and D.C. Robertson, "MODTRAN: A moderate resolution model for LOWTRAN 7", *Final report, GL-TR-0122, AFGL, Hanscomb AFB, MA*, 42 pp., 1989

Conel, J.E., R.O. Green, R.E. Alley, C.J. Bruegge, V. Carrere, J. S. Margolis, G. Vane, 'I'. G. Chrien, P. N. Slater, S.F. Biggar, P. M. Teillet, R. D. Jackson and M. S. Moran, in-flight radiometric calibration of the Airborne Visible/Infrared Imaging Spectrometer (AVIRIS), *SPIE* Vol. 924, Recent Advance in sensors, radiometry and data processing for remote sensing, 1988.

Green, R.O., G. Vane, and J.E. Conel, Determination of aspects of the in-flight spectral, radiometric, spatial and signal-to-noise performance of the Airborne Visible/Infrared Imaging Spectrometer over Mountain Pass, CA., in Proceeding of the Airborne. Visible/Infrared Imaging Spectrometer (AVIRIS) Performance Evaluation Workshop, *JPL Pub. 88-38*, 162-184, 1988.

Green, Robert O., "Retrieval of Reflectance from Calibrated Radiance Imagery Measured by the Airborne Visible/Infrared Imaging Spectrometer (AVIRIS) for Lithological Mapping of the Clark Mountains, California", *Proc. Second AVIRIS Workshop, JPL Publication 90-54*, pp. 167-175, 1990.

Green, Robert O., "Retrieval of Reflectance From AVIRIS-Measured Radiance Using a Radiative Transfer Code", *Proc. 7th AVIRIS Workshop, JPL Publication 91-28*, pp. 200-210, 1991a.

Green, Robert O., James E. Conel, Jack S. Margolis, Carol J. Bruegge, and Gordon L. Hoover, "An Inversion Algorithm for Retrieval of Atmospheric and Leaf Water Absorption From AVIRIS Radiance With Compensation for Atmospheric Scattering", *Proc. Third AVIRIS Workshop, JPL Publication 91-28*, pp. 51-61, 1991b.

Kneizys, F.X., F.P. Shettle, G. P. Anderson, L. W. Abrew, J.H. Chetwynd, J.F.A. Shelby, and W.O. Gallery, Atmospheric Transmittance/Radiance; computer Code LOWTRAN 7, AFGL, Hanscom AFB, MA., 1987.

Berk, A., I.S. Bernstein, and D.C. Robertson, "MODTRAN: A moderate resolution model for LOWTRAN 7," *Final report, GL-TR-0122, AFGL, Hanscom AFB, MA*, 42 pp., 1989.

Chandrasekhar, S., "Radiative Transfer", *Dover Press*, New York, 1960

Conel, J.E., R. O. Green, R.E. Alley, C.J. Bruegge, V. Carom, J. S. Margolis, G. Vane, 'I'. G. Chrien, P. N. Slater, S.F. Biggar, P. M. Teillet, R. D. Jackson and M. S. Moran, In-flight radiometric calibration of the Airborne Visible/Infrared Imaging Spectrometer (AVIRIS), *SPIE* Vol. 924, Recent Advance in sensors, radiometry and data processing for remote. sensing, 1988.

N., Gregg A. Swayze, Kathy Heidebrecht, Robert O. Green, and Alexander F.H. Goetz, "Calibration to Surface Reflectance of Terrestrial Imaging Spectrometry Data: Comparison of Methods", *Proc. Fifth Annual Airborne Earth Science Workshop, JPL Public 95-1*, 1995.

Gao-BC, Goetz-AFH "Column Atmospheric Water-Vapor And Vegetation Liquid Water Retrievals From Airborne imaging Spectrometer Data", *Journal Of Geophysical Research Atmospheres*, Vol. 95, No. D4, 1990

Gao-BC, Heidebrecht-KB, Goetz-AFH, "Derivation Of Scaled Surface Reflectances From AVIRIS Data", *Remote Sensing Of Environment*, Vol. 44, No. 2-3, 1993

Green, R.O. and G. Vane, "Compositional mapping of the lithologic units of the Clark Mountain, California basement terrain with the Airborne Visible/Infrared imaging Spectrometer", *Proc. SPIE Conference on Aerospace Sensing, Imaging Spectroscopy of the Terrestrial Environment*, Orlando, Florida, 16-20 April, (1990).

Green, R.O., James E. Conel, Jack Margolis, Carol Bruegge and Gordon Hoover, "An inversion Algorithm for Retrieval of Atmospheric and Leaf Water Absorption from AVIRIS Radiance with Compensation for Atmospheric Scattering", in *Proceedings of the Third AVIRIS Workshop*, R.O. Green, editor, [J], Publication, 1991a.

Green, R.O., (1991), Retrieval of Reflectance from AVIRIS Radiance Using a Radiative Transfer Code, in *Proceedings of the Third AVIRIS Workshop*, R.O. Green, editor, [J], Publication, 1991 b.

Green, Robert O., James E. Conel and Dar A. Roberts, "Estimation of Aerosol Optical Depth and Calculation of Apparent Surface Reflectance from Radiance Measured by the Airborne Visible - Infrared imaging Spectrometer (AVIRIS) Using MODTRAN2", *SPIE Conf. 1937, Imaging Spectrometry of the Terrestrial Environment*, in press, 12 p. 1993a.

Green, Robert O. and Bo-Cai Gao "A Reposed Update to the Solar Irradiance Spectrum Used in LOWTRAN and MODTRAN", *Proc. Fourth Annual Airborne GeoScience Workshop, JPL Public 93-26*, 1993b.

Green, Robert O. and James E. Conel "Movement of Water Vapor in the Atmosphere Measured by an imaging Spectrometer at Rogers Dry Lake, CA", *Proc. Fifth Annual Airborne Earth Science Workshop, JPL Public 95-1*, 1995.

Stamnes, S-Chee Tsay, Warren Wiscombe, and Koff Jayaweera, "Numerically Stable Algorithm for Discrete-Ordinate-Method Radiative Transfer in Multiple Scattering and Emitting Layered Media", *Applied Optics*, Vol. 27, No. 12, 1988.