





# Phaeton Mast Dynamics: On-Orbit Characterization of Deployable Masts

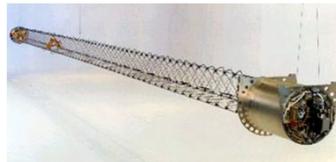

Darren Michaels

NASA Jet Propulsion Laboratory  
California Institute of Technology

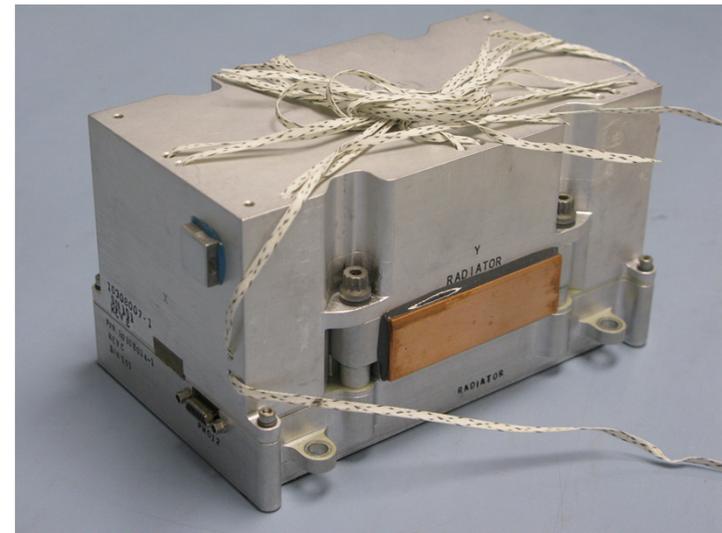



# Background



*PMD – Phaeton Mast Dynamics*

*Phaeton Program*

The PMD instrument was designed and built for the Nuclear Spectroscopic Telescope Array (NuSTAR) spacecraft. After instrument completion, NuSTAR de-scoped PMD for NuSTAR-internal reasons. PMD is now hosted by the Air Force Research Laboratory's (AFRL) Demonstration and Science Experiments (DSX) mission.

This presentation discusses the PMD instrument architecture and design, including design constraints, design solutions, and instrument results. Since the design and build phases were completed with PMD as a NuSTAR payload, the presentation discusses NuSTAR's constraints and initial accommodations.

The instrument results presented here are independent of the host mission, but the effects of a host mission's data handling design on PMD capabilities is discussed in 2011 IEEEAC Paper 1305.



# Objective



PMD – Phaeton Mast Dynamics

Phaeton Program

## Purpose

- Characterize the on-orbit structural behavior of the NuSTAR spacecraft's 10-m deployable mast

## Minimum Mission Success


- Measurement of one degree of freedom for motion of the mast's first bending mode

## Dynamic Range of Interest

- 1-5 Hz motions with 1-10 micron displacement (100's of  $\mu\text{g}$ )

## Requirements

- Detect accelerations from 50  $\mu\text{g}$  to 2000  $\mu\text{g}$  in the 0.1–30 Hz range
- PMD experiment to be a separate fault containment zone

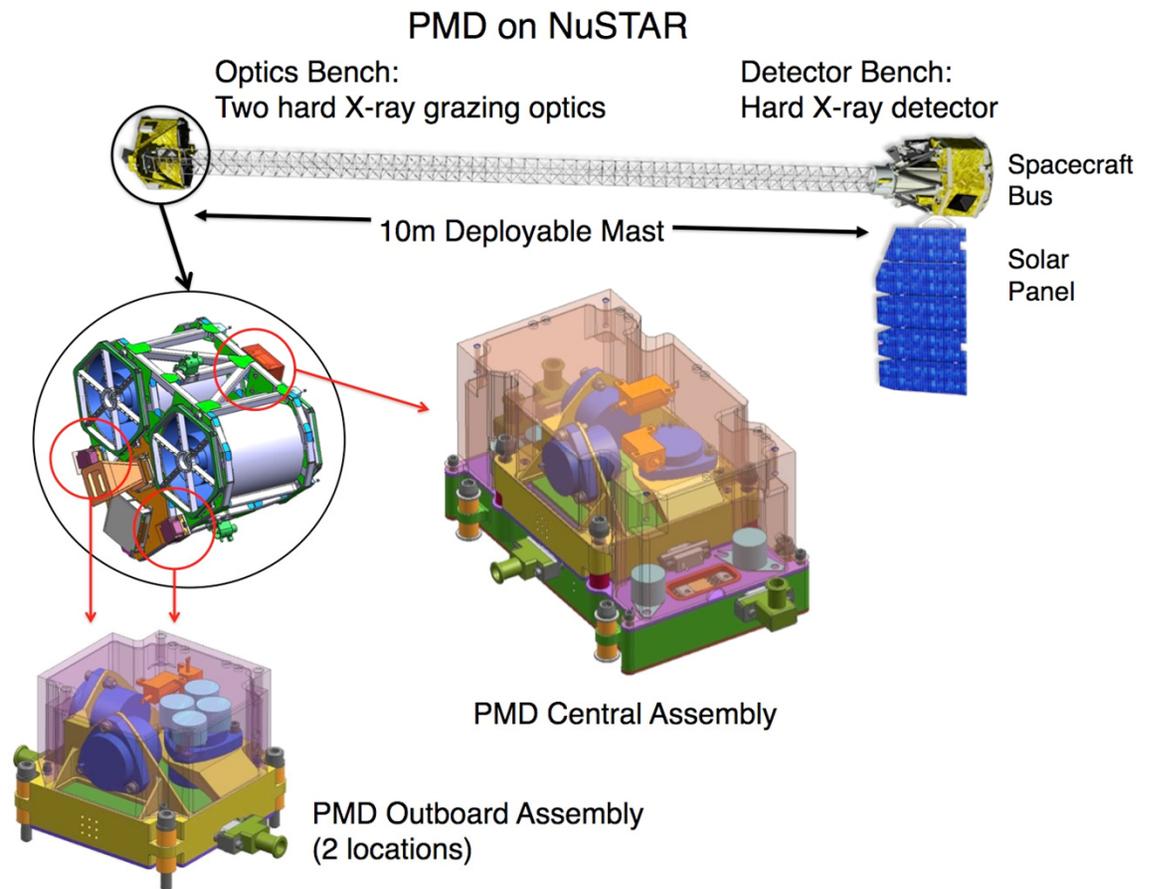



# System Architecture



PMD – Phaeton Mast Dynamics

Phaeton Program

## Sensor Selection

- Honeywell QA2000 accelerometer chosen for:
  - 1  $\mu\text{g}$  resolution
  - Tolerance to NuSTAR's launch environment
  - Flight heritage
  - Low mass
- Additional attributes include:
  - Single axis measurement
  - $\pm 15\text{ V}$  operation
  - Acceleration-proportional current output



## NuSTAR Provisions & Constraints

- PMD footprint options only on Optics Bench
  - 3 locations offered
- A/D conversion and data handling performed by NuSTAR
  - Single analog input with  $\pm 3\text{ V}$  range
  - 57.6 kbit/s maximum data rate
- +28 V primary supply voltage
  - Independent survival heater power line included

## Resulting Architecture Design


- PMD System:
  - 3 units - each with 3 triaxially mounted QA2000's and collocated signal conditioning circuitry
  - Allows for full reconstruction of the rigid-body motions of the optics bench relative to the detector bench
  - 6 degrees of freedom measured: X, Y, Z (directly), yaw, pitch, roll (indirectly)
- Signal Conditioning Electronics:
  - Transimpedance amplifier
  - 8<sup>th</sup>-order Butterworth low pass anti-aliasing filter accommodating a 200 Hz sampling frequency per channel
- Power Conditioning Electronics:
  - Interpoint DC-DC converter & EMI filter
  - $\pm 15\text{ V}$  secondary voltage for QA2000's
  - $\pm 3.5\text{ V}$  regulated voltage for amplifiers
  - Inrush current limiter
  - Fully redundant, passively controlled heater system



# System Architecture



### PMD Electronics Block Diagram

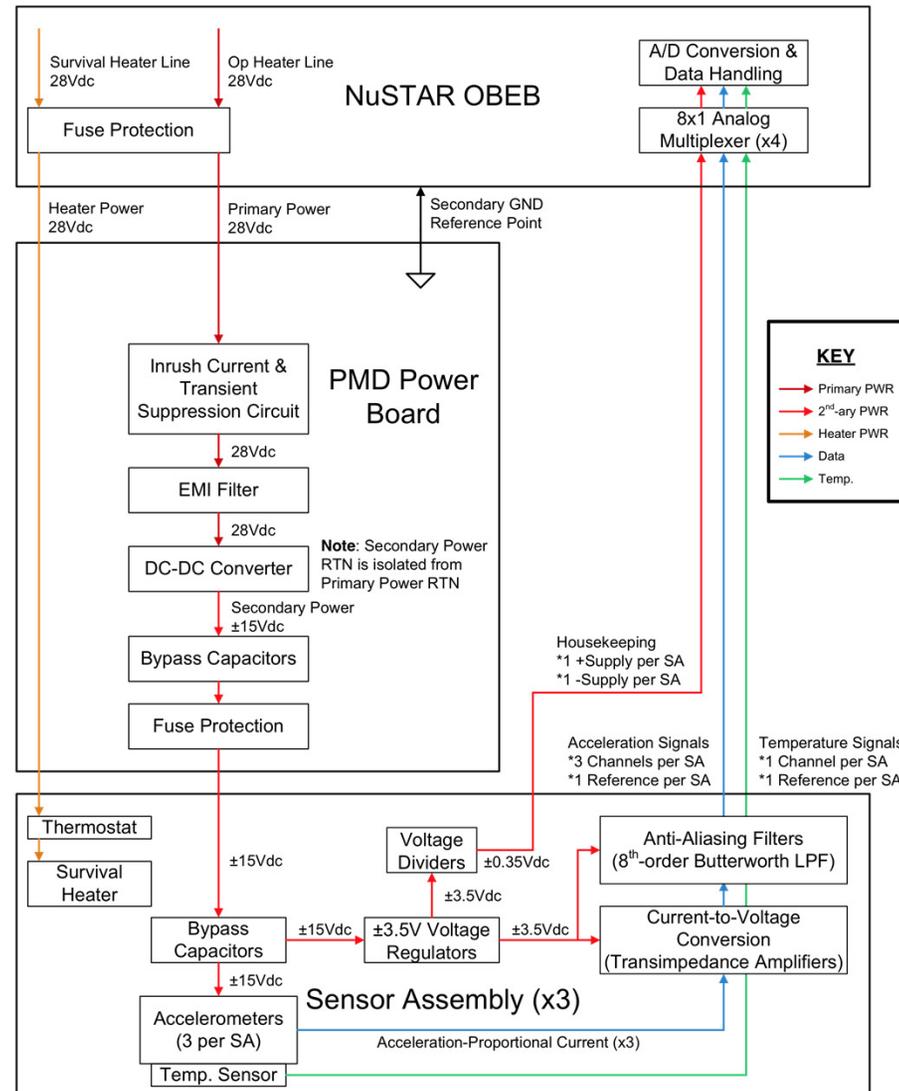



# Electronics Design



PMD – Phaeton Mast Dynamics

Phaeton Program




## Signal Conditioning Electronics

### – Transimpedance amplifier design:

- Op-amp selected with low input bias current to meet the 65 nA (or 50  $\mu\text{g}$ ) minimum detection requirement, the 16 nA (or 13  $\mu\text{g}$ ) LSB with NuSTAR's ADC, and the 1.3 nA (or 1  $\mu\text{g}$ ) QA2000 resolution limit
- Input offset voltage no concern to calibrated data
- 22.1 k $\Omega$  load resistor selected for full  $\pm 3$  V ADC range at 0.1 g input
- A single 22,100- $\Omega$  transimpedance gain stage is sufficient to keep the QA2000 sensors from saturating

### – Anti-aliasing filter design:

- 8<sup>th</sup>-order Butterworth low pass filter using cascaded versions of the Sallen-Key topology
- 30-Hz cutoff frequency allows for 84 dB attenuation by the 100-Hz Nyquist frequency
- Butterworth filter minimizes amplitude distortion
- Phase distortion is inconsequential to PMD data

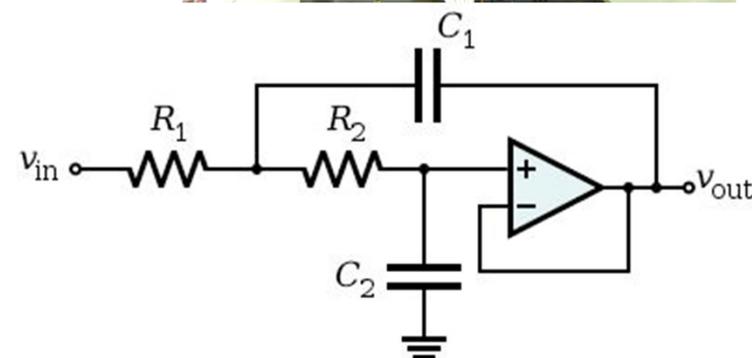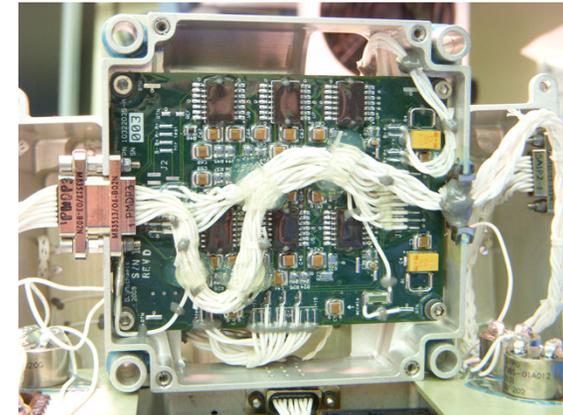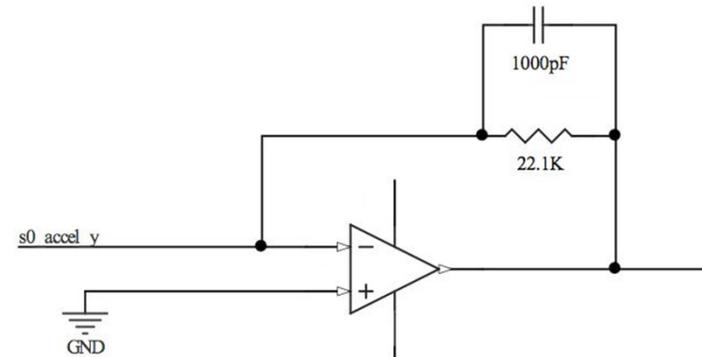



# Electronics Design





PMD – Phaeton Mast Dynamics

Phaeton Program

## Power Conditioning Electronics

- Interpoint DC-DC converter & EMI filter selected to provide  $\pm 15$  V secondary supply voltage to PMD electronics
  - Supplies QA2000's
  - Provides DC isolation between PMD electronics and NuSTAR's heater power bus
- Linear voltage regulators provide  $\pm 3.5$  V to signal conditioning electronics from  $\pm 15$  V secondary supply
  - Allows headroom for full use of NuSTAR's  $\pm 3$  V ADC input range
  - Limits PMD data from encroaching the ADC's  $\pm 5$  V absolute maximum input voltage rating
- Soft-start circuit keeps inrush current limited to under 2 A
  - Delay on DC-DC converter's inhibit pin separates primary and secondary inrush peaks
  - 10 ms timing separation between peaks maintains operability from  $-35$  C to  $+60$  C and with input voltage from  $+22$  V to  $+34$  V

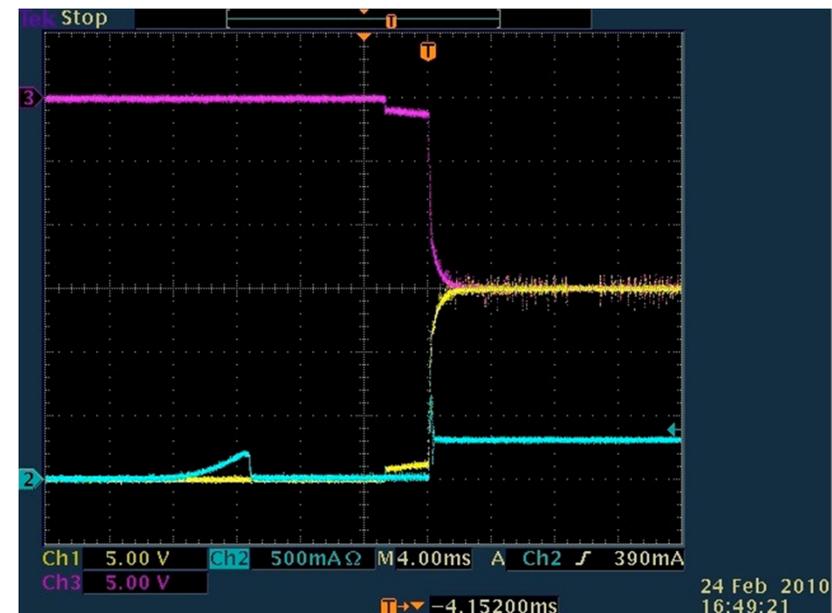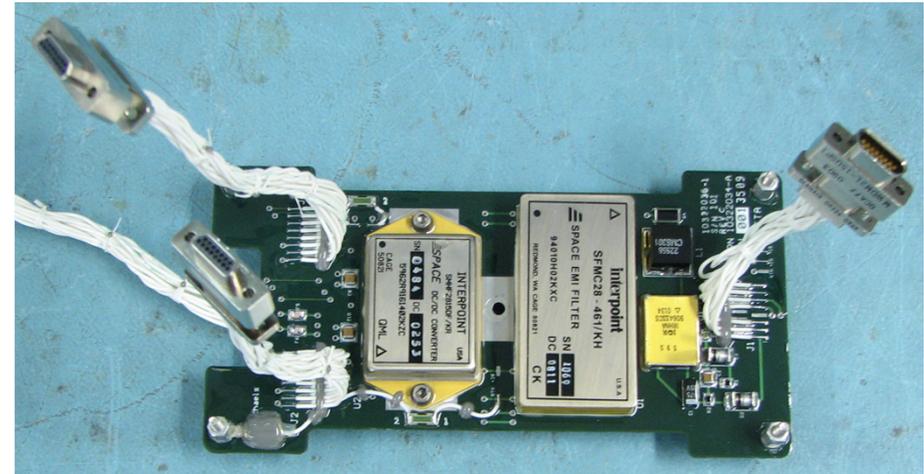






# PMD Units



PMD – Phaeton Mast Dynamics

Phaeton Program

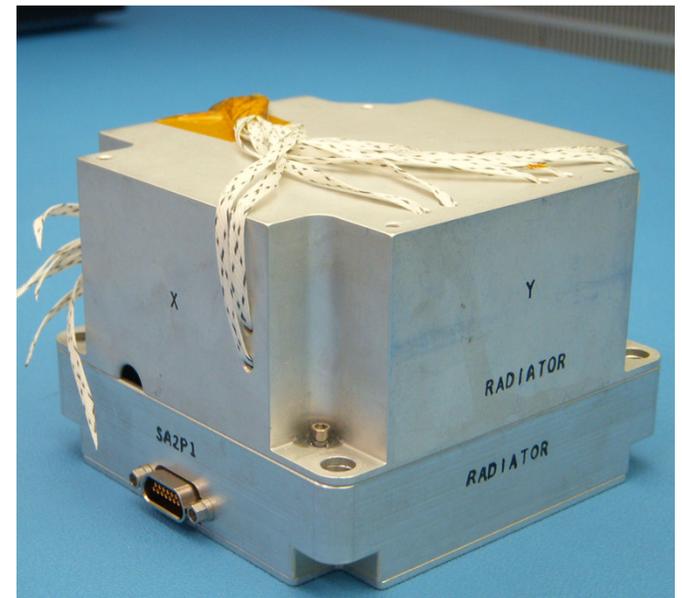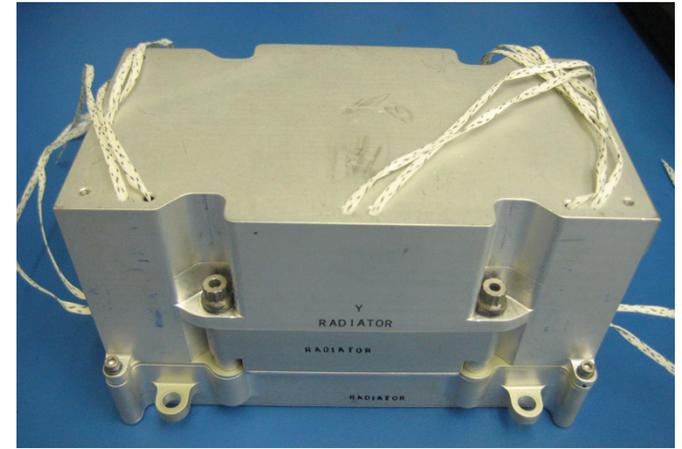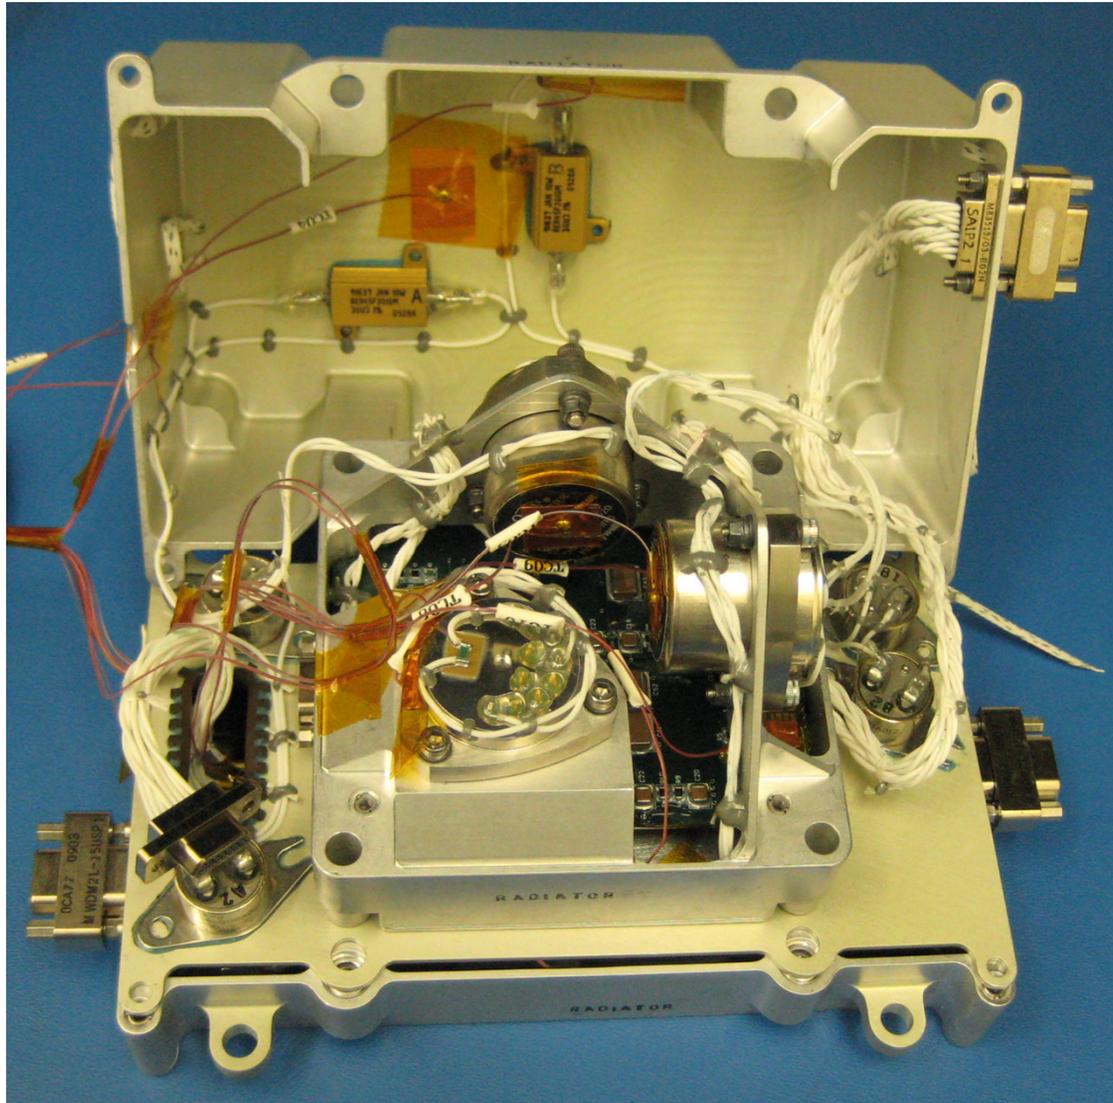



# Performance Verification



PMD – Phaeton Mast Dynamics


Phaeton Program

## PMD Performance Goals

- 0.1-30 Hz required frequency range
  - Measure 1<sup>st</sup>-order bending mode (1-5 Hz)
  - Measure 1<sup>st</sup> three modal frequencies (1-20 Hz)
- 50-2000  $\mu\text{g}$  required amplitude range
  - Goal of 1  $\mu\text{g}$  resolution
  - Goal of 0.1 g at  $\pm 3$  V ADC limits

## PMD Performance Verification

- Confirmed frequency response of electronics
  - Done before QA2000 integration
- Instrument Calibration
  - Only practical method of performance testing
  - PMD mounted on rate table with isolation from building and full 360-degree rotation about zenith direction and azimuth axis
  - Known acceleration inputs achieved by aligning specific radial axes with gravity

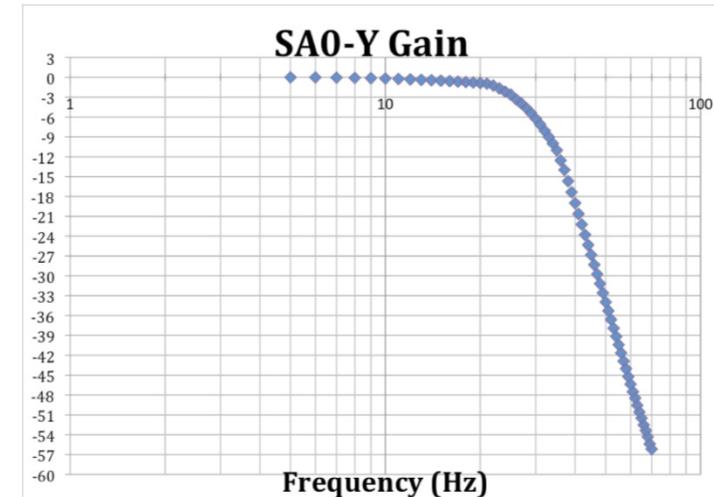



# Calibration Details




PMD – Phaeton Mast Dynamics

Phaeton Program


## Purpose

- Completely characterize instrument to allow for full reconstruction of actual motions experienced during flight
  - Determine precise scale factors
  - Determine inherent biases
  - Determine axis misalignments
- Confirm instrument resolution

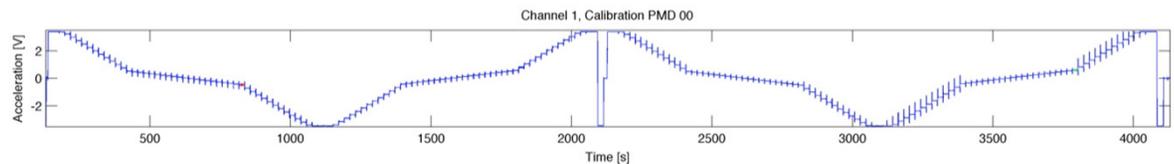

## Method

- Capture data over a series of pre-determined, automated rate table moves
  - 2 planes per axis to determine misalignment (i.e. x-y and x-z planes for x-axis misalignment)
  - 2 directions per plane to determine bias (i.e. +x and -x for x-axis alignment)
  - 12 total runs needed to characterize all accels
  - $\pm 8$  degree table tilt needed to exercise full  $\pm 3.5$  V (or  $\pm 0.12$  g) range of instrument
  - 20 s hold times at each table position to allow ringing oscillations to dampen out

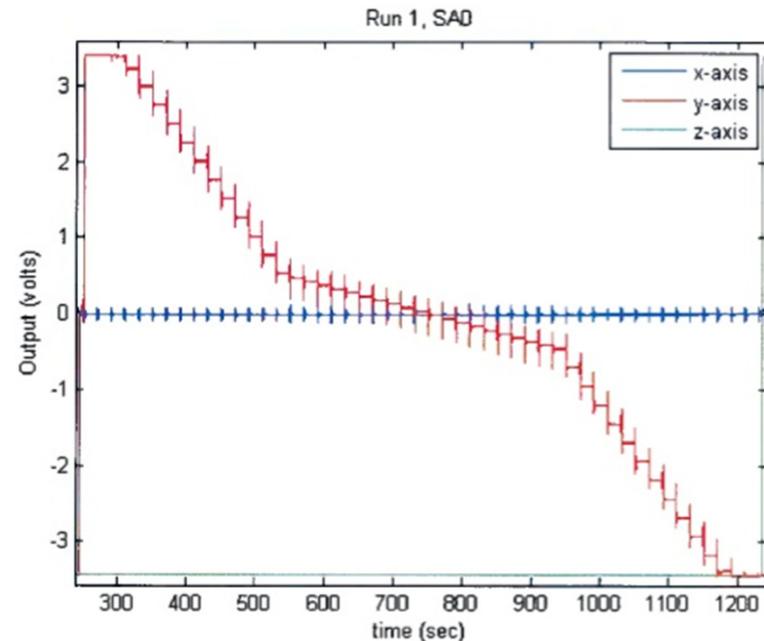



# Calibration Details




## Data Processing

- Initially first-order approximations
- Voltage v. Acceleration curves
  - Slope = scale factor
  - Bias = (offset\_up + offset\_down) / 2
  - Misalignment = (offset\_up – offset\_down) / 2
  - ±0.12 g range confirmed

## Calibration Results

- Scale Factor
  - Determined 4 times per accelerometer (two runs per plane, two planes per axis)
  - Consistent results within 0.001 V/g
- Bias
  - Determined 2 times per accelerometer (once per plane, two runs per plane)
  - Consistent results within 10 µg
- Axis Misalignment
  - Results tabulated in paper

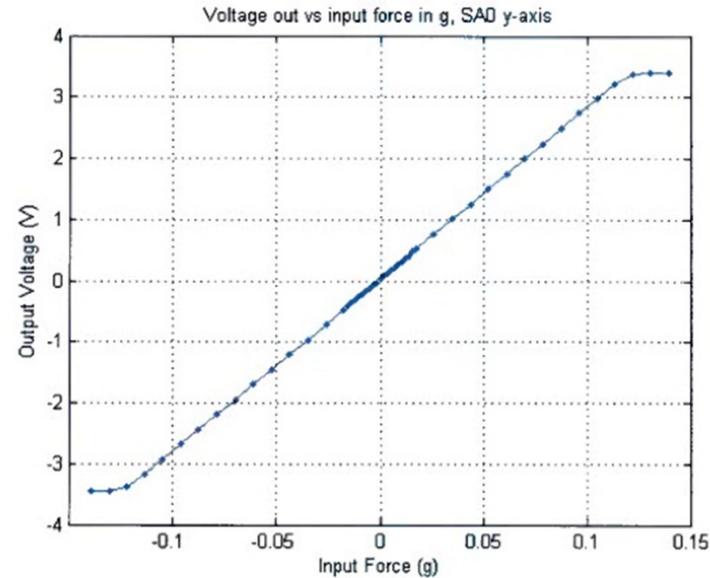

Averaged Values	Axis	Scale Factor (V/g)	Bias (g)
SA0 – Outboard 1	X	28.241	0.00017
	Y	28.296	0.00106
	Z	28.704	0.00127
SA1 – Central	X	28.301	0.00188
	Y	28.494	0.00017
	Z	28.184	0.00184
SA2 – Outboard 2	X	28.330	-0.00110
	Y	28.253	0.00129
	Z	28.344	0.00148
Estimated Error:		0.001	0.00001



# Performance & Capabilities



PMD – Phaeton Mast Dynamics



Phaeton Program

## Instrument Resolution

- Data collected for several minutes with rate table powered off
- Single accelerometer data shows detected signal levels under  $20 \mu\text{g}$
- Subtracting data from two co-linear accelerometers reduces the noise due to real motions of the rate table
  - Detected signal levels under  $1 \mu\text{g}$  over the entire frequency range

## PMD Performance Summary

- Sensitivity
  - Measures 3-axis accelerations within  $1 \mu\text{g}$
- Dynamic Range
  - 0.1-30 Hz
  - $1 \mu\text{g}$  to 0.12 g acceleration
- Signal Output
  - Scaled analog voltage in  $\pm 3.5 \text{ V}$  range

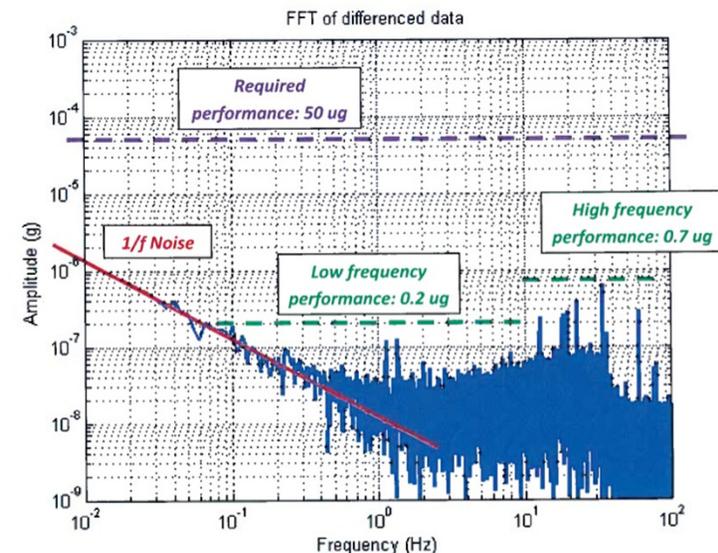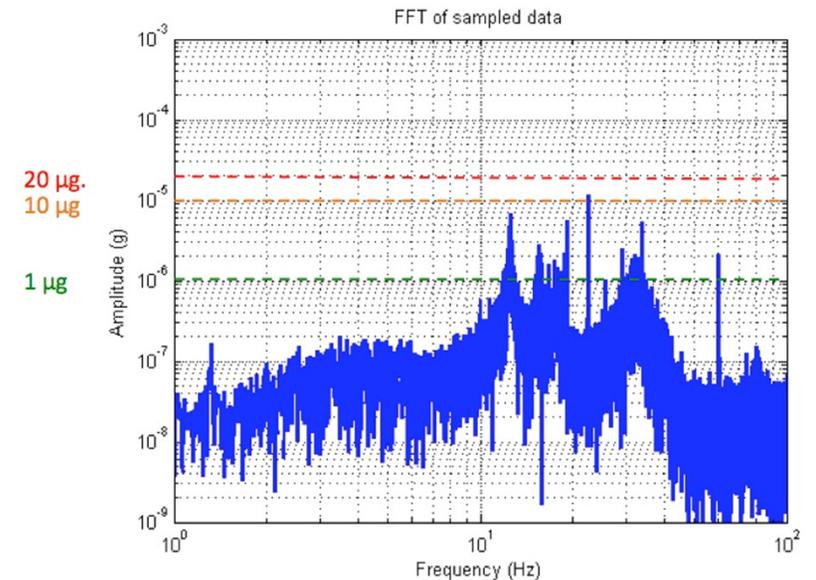



# PMD Status & Significance



PMD – Phaeton Mast Dynamics





Phaeton Program

## Status of Instrument

- PMD de-scoped from NuSTAR, April 2010
- PMD Central Assembly (PCA) added to the Air Force Research Laboratory's DSX mission, October 2010
  - Measure 1st & 2nd vibration modes of DSX y-antennas, and correlate with mathematical models
  - Study the effects of aging on composite structures
  - Detect spacecraft motions during antenna deployment
- PMD Outboard Assemblies in long-term JPL storage facility

## Significance of Work

- Data return benefits the deployable structures community
  - Provides 0 g characteristics of structures for comparison against 1 g tests
  - Studies ageing effects and overall structural health over an extended period of time in space
  - Detects the structural response to thermally-induced vibrations & spacecraft mechanisms
- Improved sensitivity and dynamic range from commercially available IMU units

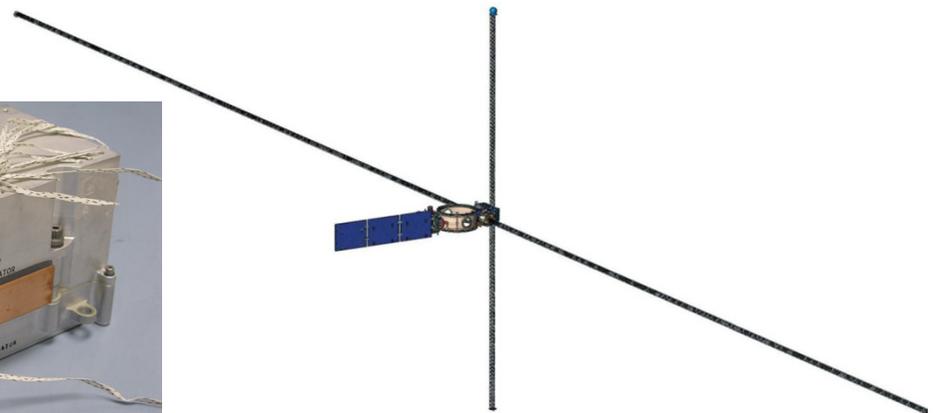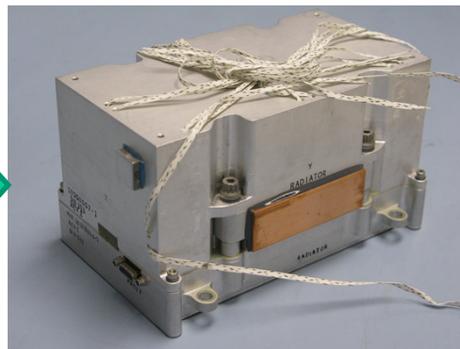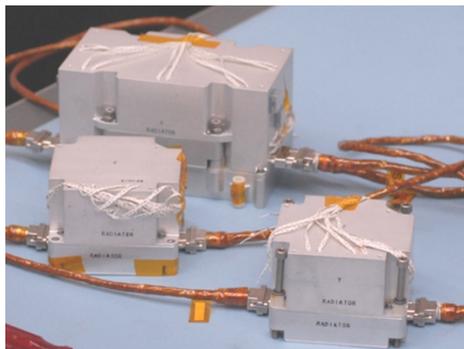

9/25/2012

13



# Acknowledgement



PMD – Phaeton Mast Dynamics

Phaeton Program

The author would like to thank:

## **PMD Team**

- Lauren Halatek
- Mike Dolphin
- Case Bradford
- Deb Sigel
- Peter Dillon
- Michael Long
- Elvis Merida
- Scott Williams
- Pezhman Zarifian
- Heidi Menches

## **Phaeton Program**

- Johnny Kwok
- Ross Jones

## **Technical Consultants**

- Gary Bolotin
- Tien Nguyen
- Dave Randall

## **NuSTAR Project**

- Jason Willis
- Yunjin Kim

## **DSX Support**

- Henry Abakians
- AFRL DSX Team

**Thank you for your support and attendance!**



The work described in this presentation was carried out by the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.



# Backup – Vibration Levels



PMD – Phaeton Mast Dynamics

Phaeton Program

