


# WRSM and Future NASA Missions

by

Shervin Shambayati



## WRSM and Future NASA Missions

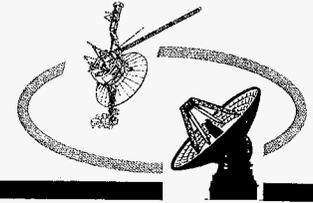


JPL

### Why WRSM?

- Due to lack of spectrum at X-band (8.41 GHz) NASA's Deep Space missions are switching to higher frequencies (32 GHz Ka-band and optical) for their primary science downlink. While these frequencies have higher average capacity than X-band for the same amount of power spent on the spacecraft, the maximum average capacity is achieved at a lower weather reliability for them. WRSM is an attempt to use weather forecasting to increase the weather reliability of the link and to reduce its uncertainties at higher frequencies.



## WRSM and Future NASA Missions

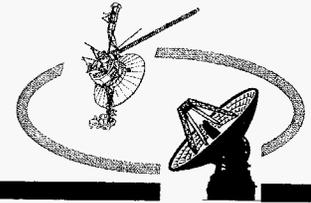


### WRSM: Goals and Challenges

- Goal: To convert meteorological forecasts to relevant parameters for link design at the frequencies of interest (Ka-band and optical) and provide them on a timely basis to the missions.
- Challenges:
  - Defining the conversion algorithm.
  - Getting mission to use forecasts in a timely manner (requires change of mission operations philosophy).
  - Modifying the link design methods if necessary.



## WRSM and Future NASA Missions

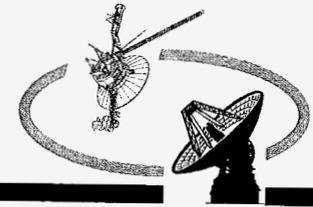


**JPL**

WRSM: Missions that may need it

<b>Mission</b>	<b>Downlink</b>
MRO	Prime X-band, Experimental Ka-band
Kepler	Prime Ka-band
SIM	Prime Ka-band
MTO	Prime Ka-band, Experimental Optical
JWST	Prime Ka-band (near-earth)
JIMO	Prime Ka-band



## WRSM and Future NASA Missions

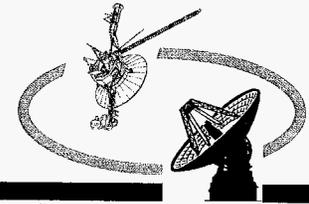


JPL

### WRSM: A Closer Look at Challenges for the Missions

- Currently mission planning cycle time is about four weeks (MRO) for the background sequence with weekly updates through mini-sequences.
- Forecasts are good for at most four days in advance.
- In order for missions to use forecasts effectively they need to reduce their telecom planning cycle time.
- Some proposed solutions (brain-storming):
  - Separate sequencing for telecom with near real time commanding
    - Problem: Requires modifications to the data management system on the spacecraft with effective automatic handshaking between the spacecraft data management system and the telecom system.
  - Multiple data rate profile programming for the spacecraft. At the regular planning cycles program multiple data rate profiles for the same pass and based on the forecast select the most appropriate profile during the pass.
    - Problem: Requires additional planning resources by the mission. May not improve the performance much.



## WRSM and Future NASA Missions

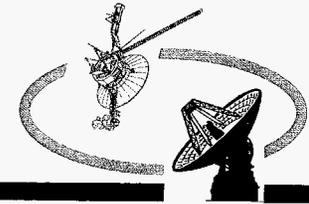


JPL

### WRSM: Current Status

- Ka-band:
  - Developed an algorithm that converts meteorological forecasts from Space Flight Meteorological Group in NOAA into link design parameters for Goldstone DSCC (Slobin and Shambayati, JPL).
  - Developed the link design algorithm for Ka-band that uses the parameters generated by the forecasting algorithm.
  - Developed plans for MRO Ka-band demonstration to explore operational use of forecasting.
  - Obtained preliminary results for the performance of the forecasting algorithm.
- Optical:
  - No work has been done at this time.



## WRSM and Future NASA Missions

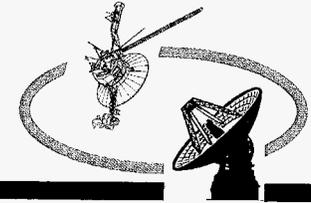


JPL

### WRSM: Reducing Uncertainty for the Missions

- Uncertainty on the link is associated with the outage and good period durations (continuity) of the link. If the outage period is too long, the spacecraft buffer could overflow. To avoid such a scenario, missions have to carry large buffers. Similarly, if good periods are too short, completeness of the data may be affected.
- WRSM could help reduce the maximum length of outage periods and increase the number of good period with long enough durations.



## WRSM and Future NASA Missions

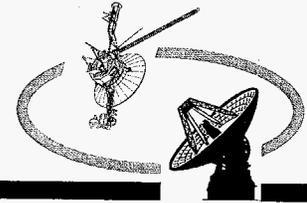


JPL

### WRSM: Example of Uncertainty reduction


- The continuity statistics at different elevations with and without forecasting were obtained for a time period from September 2003 through April 2004. Forecasting Reduced both the mean and the standard deviation of outage periods while slightly reducing the mean of good periods and significantly reducing their standard deviations.



# WRSM and Future NASA Missions

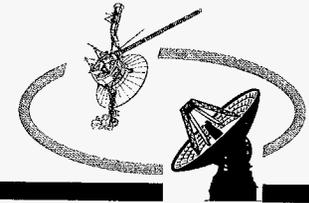


### Comparison of Link Continuity Statistics: Forecasting and Monthly Statistics

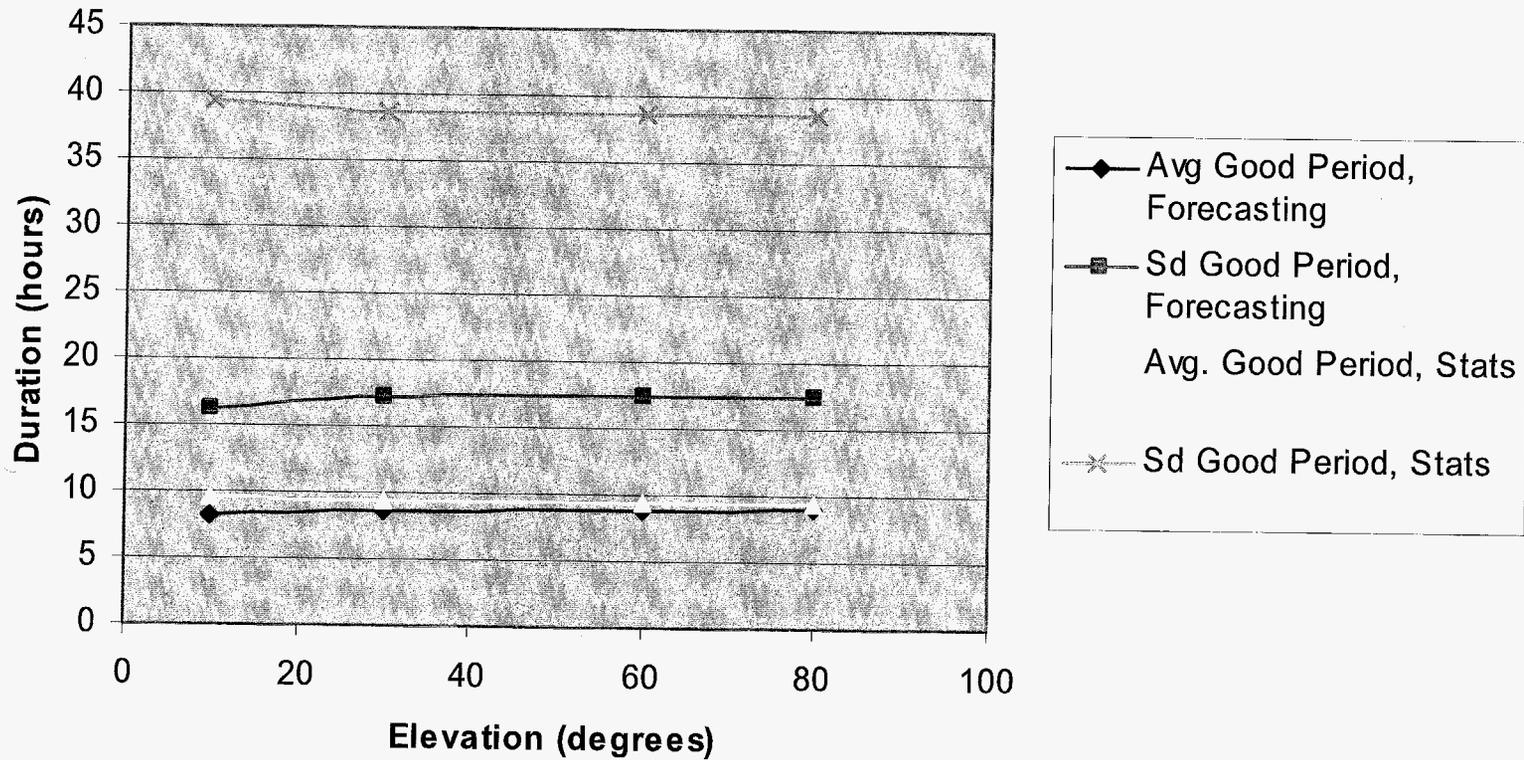




# WRSM and Future NASA Missions

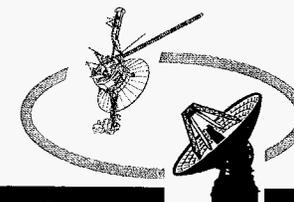


JPL

### Comparison of Outage Statistics: Forecasting and Monthly Statistics

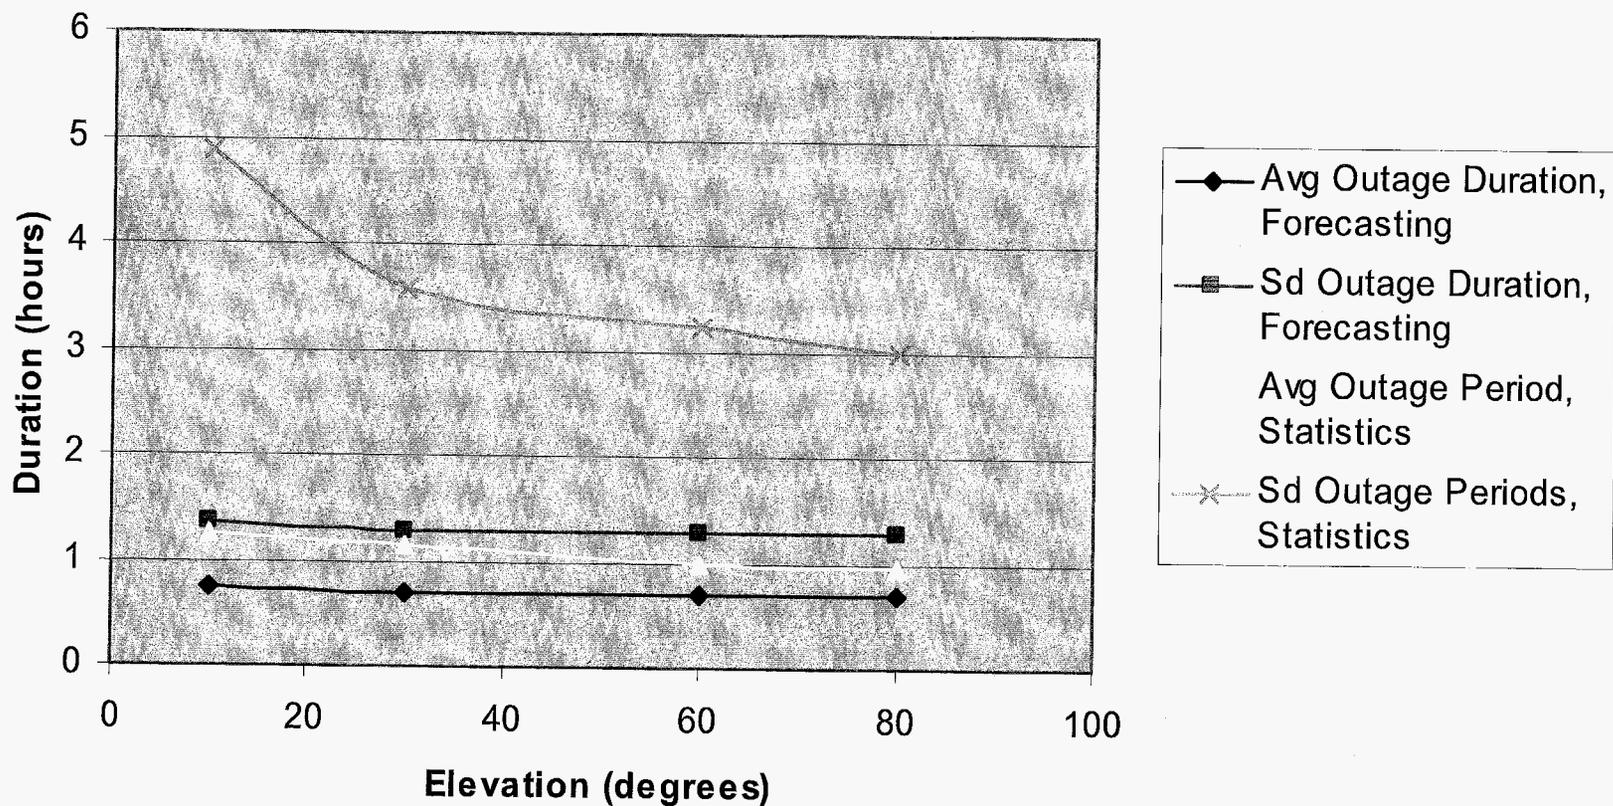



## WRSM and Future NASA Missions

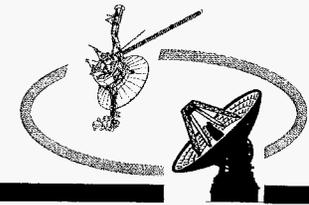

JPL

### WRSM: Making it Useful for Future Missions

- Ka-band:
  - Improve the forecasting algorithms.
  - Extend the algorithms to Canberra and Madrid DSCC (requires 3 to five years of WVR data collection for these sites simultaneously with NOAA forecasts).
  - Work out an operational methodology acceptable to future missions to maximize the benefits of forecasting (MRO Ka-band demo).
- Optical:
  - Identify link budget parameters that are affected by the weather.
  - Devise algorithms to estimate these parameters from meteorological forecasts.
  - Identify possible optical ground tracking station sites and collect statistics (both in terms of link parameter measurements and forecasts) for those sites.
  - Etc. (?)