

# EJSM/Jupiter Europa Orbiter Design and Status

Karla B. Clark

NASA–JEO Study Lead

Jet Propulsion Laboratory


California Institute of Technology

January 18, 2010

3rd EJSM Instrument Workshop

Jupiter Europa Orbiter

The NASA Element of the Europa Jupiter System Mission





# JEO Baseline Mission Overview

- Objectives: Jupiter System, Europa
- Launch vehicle: Atlas V 551
- Power source: 5 MMRTG
- Mission timeline:
  - Launch: 2018 to 2022, nominally 2020
    - Uses 6-year Venus-Earth-Earth gravity assist trajectory
  - Jovian system tour phase: 30 months
    - Multiple satellite flybys: 4 Io, 6 Ganymede, 6 Europa, and 9 Callisto
  - Europa orbital phase: 9 months
  - End of prime mission: 2029
  - Spacecraft final disposition: Europa surface impact
- 11 Instruments, including radio science
- Optimized for science, cost, and risk
- Radiation dose: 2.9 Mrad (behind 100 mils of Al)
  - Handled using a combination of rad-hard parts and tailored component shielding
  - Key rad-hard parts are available, with the required heritage
  - Team is developing and providing design information and approved parts list for prospective suppliers of components, including instruments






# Mission Radiation Challenge

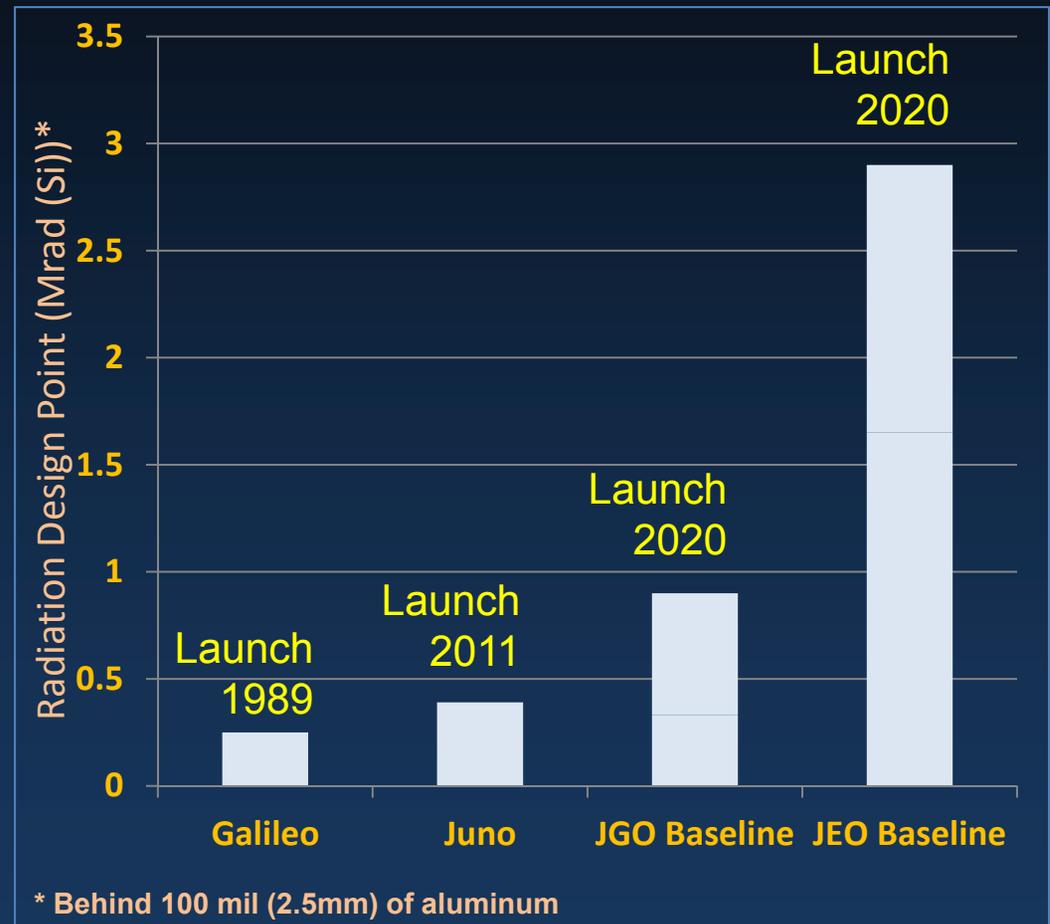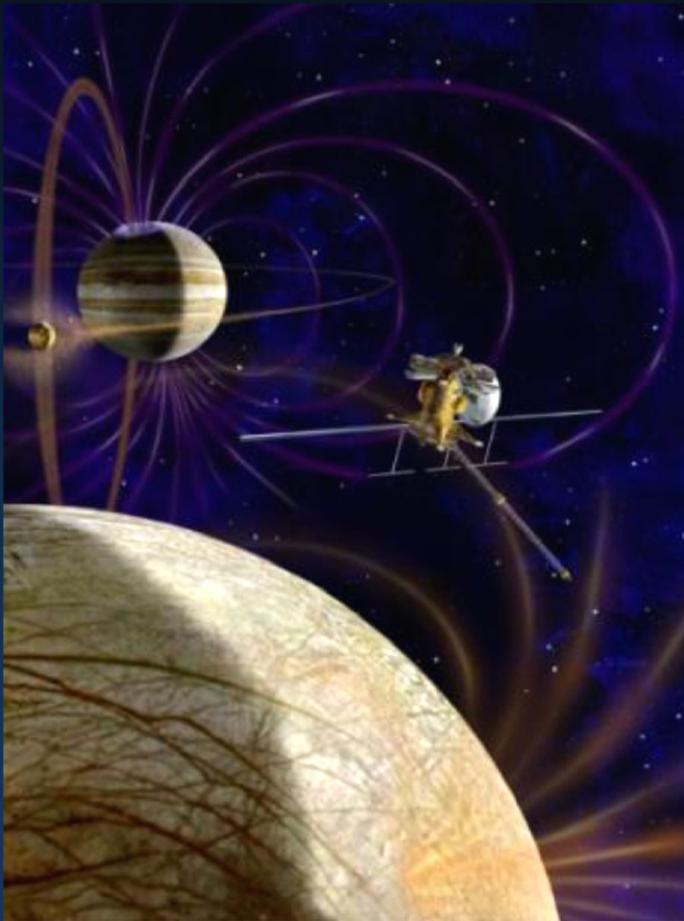



*Estimated radiation dose levels unprecedented for NASA/ESA missions*




# JEO Mission Design Overview

- Interplanetary trajectories feature gravity-assists to greatly reduce the required specific energy of launch
- Jupiter Orbit Insertion occurs low in Jupiter's gravity well, significantly reducing  $\Delta V$
- Gravity-assist tour of Jovian satellites greatly reduces size of Europa Orbit Insertion maneuver

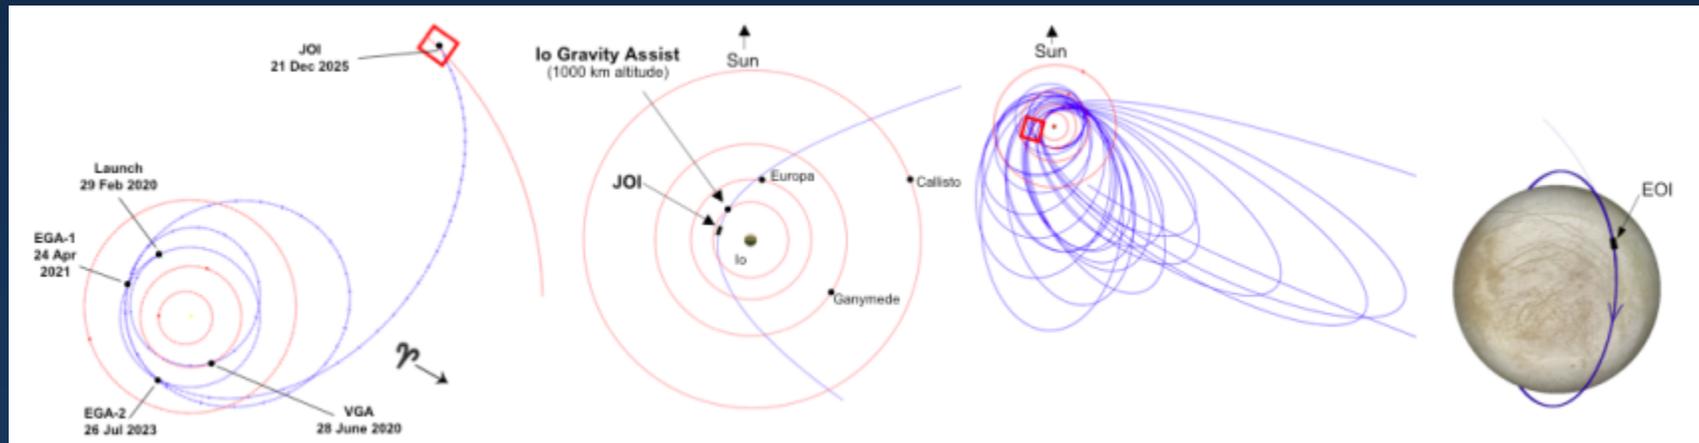




# JEO Baseline Trajectory & Orbit Insertion

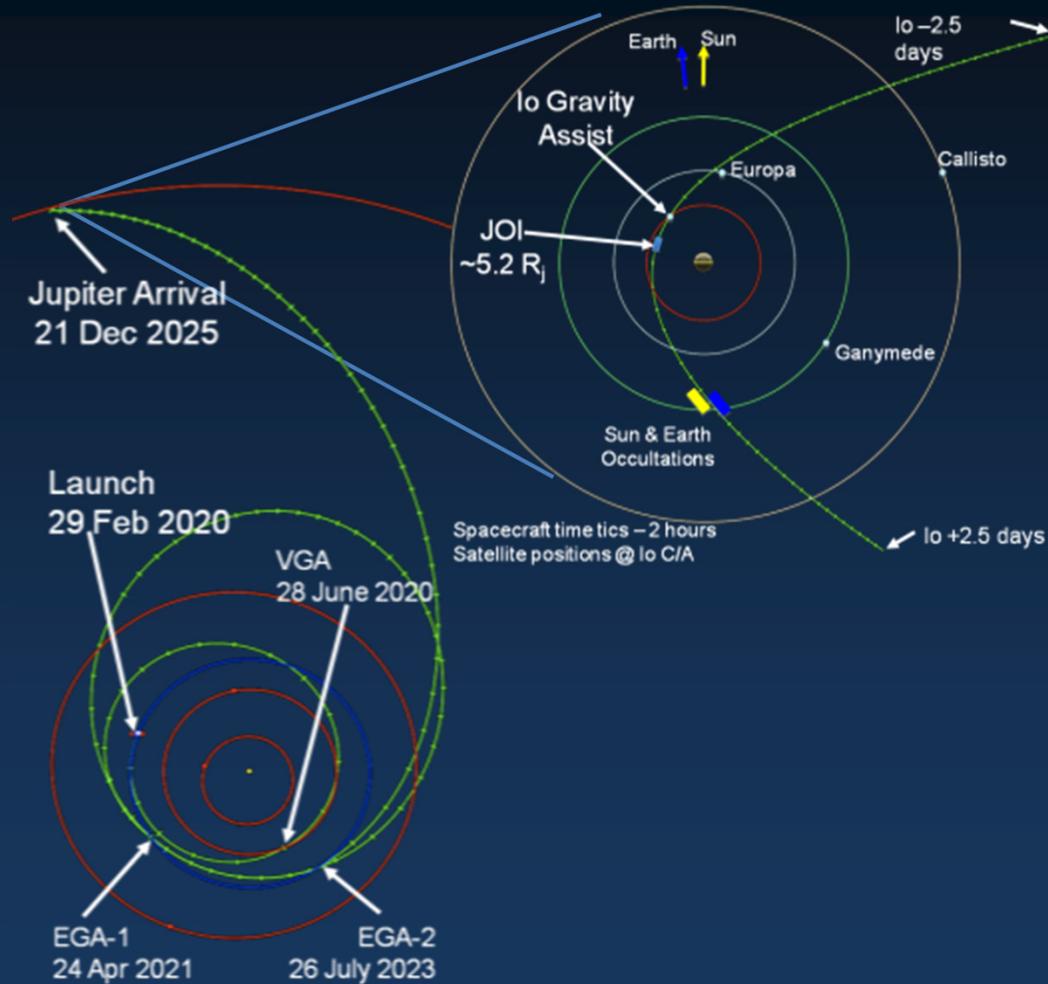


- Launch on Atlas V
- 4733 kg wet mass
- Venus-Earth-Earth Gravity Assist (VEEGA)
- Minimum range to Sun  $\geq 0.7$  AU
- JOI date: 21 December 2025
- JOI range: 5.2 R<sub>J</sub>
- 200-day initial orbit post-JOI
- Io gravity assist
- Science tour starts post JOI




# JEO Tour Design Drivers

- Radiation Environment
- Science Observations
  - Satellite Flybys
  - Geometry
  - Lighting
- Duration

— Tour 08-008 from late 2008  
— Tour 08-007 from early 2008


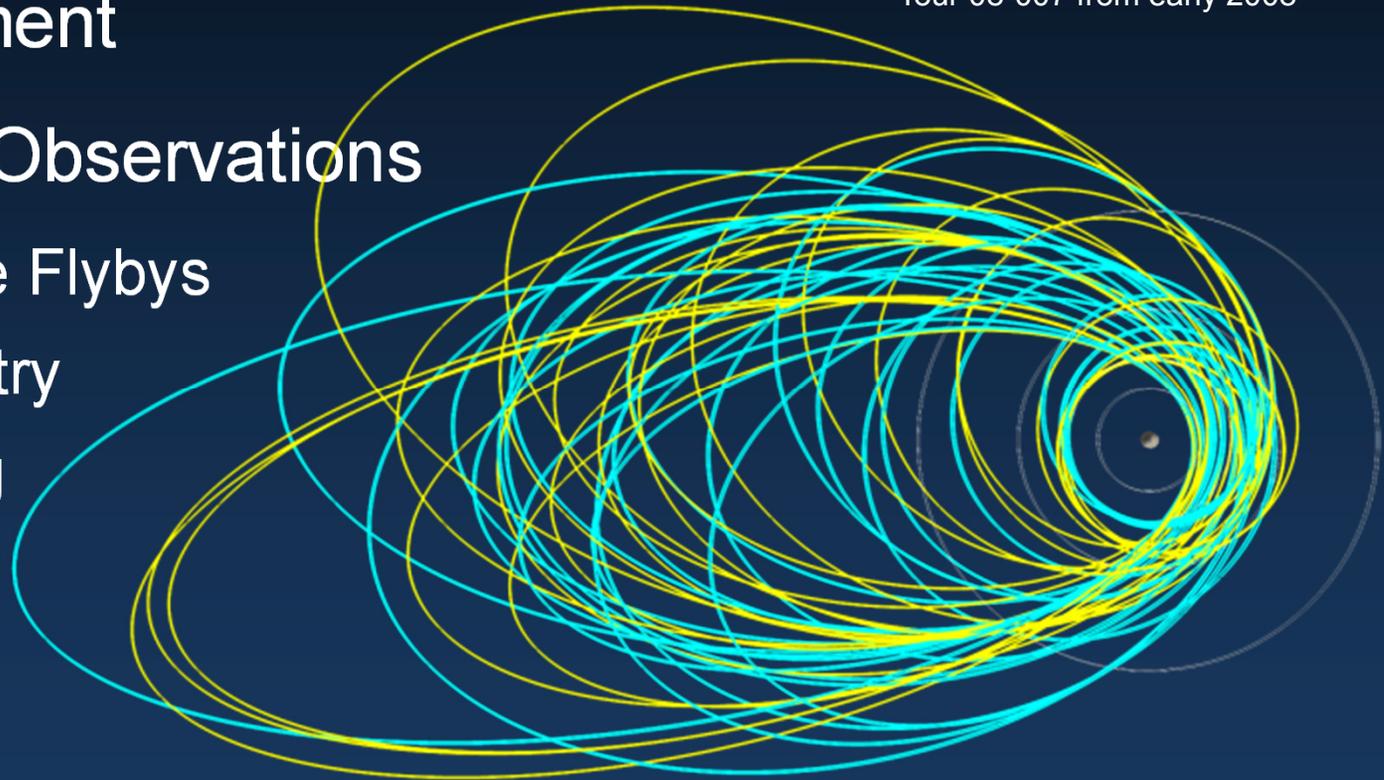


*Tour design continues to evolve*



# JEO Tour Design

- Many tours possible. Baseline tour T08-008 shown here
- No deterministic  $\Delta V$  between I1 and start of endgame

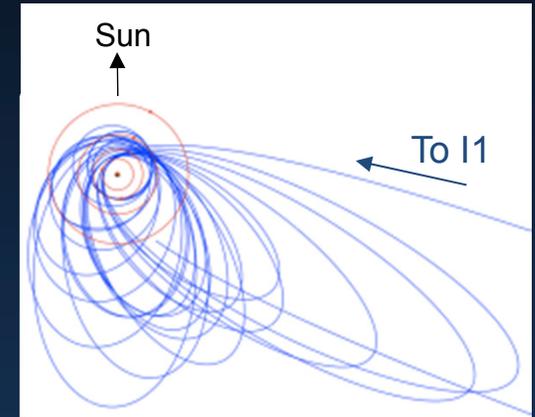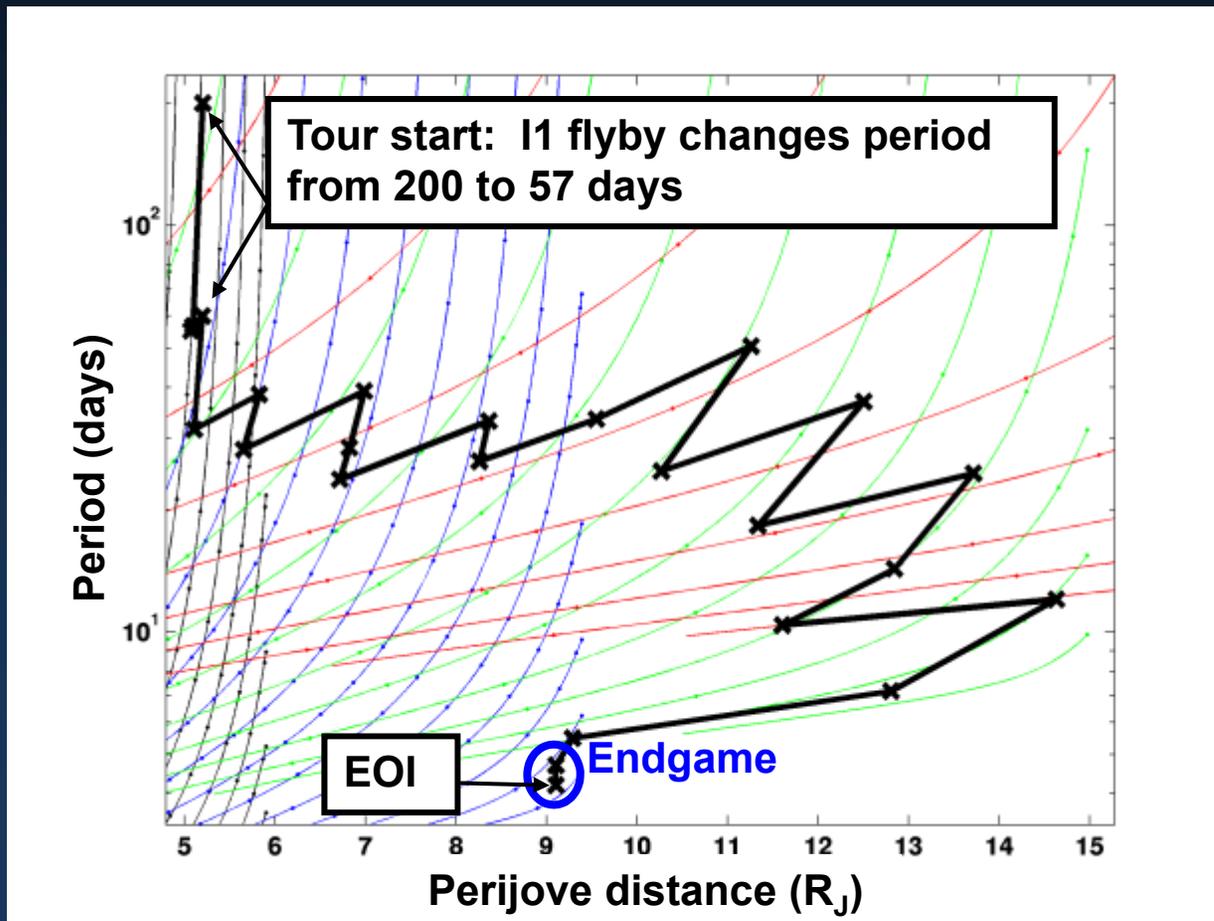

- Periapsis raised early in the tour to minimize radiation exposure (and the attendant shielding)





# Baseline JEO Jovian Tour Phase



Phase:  
100 deg


Phase:  
120 deg

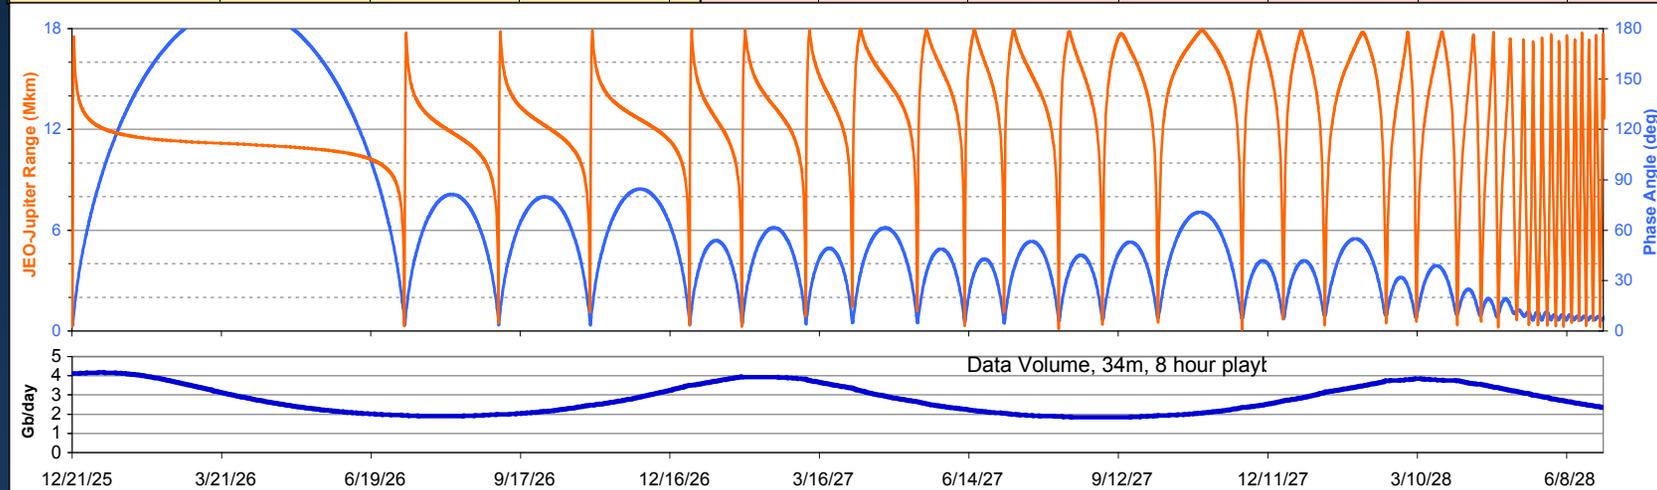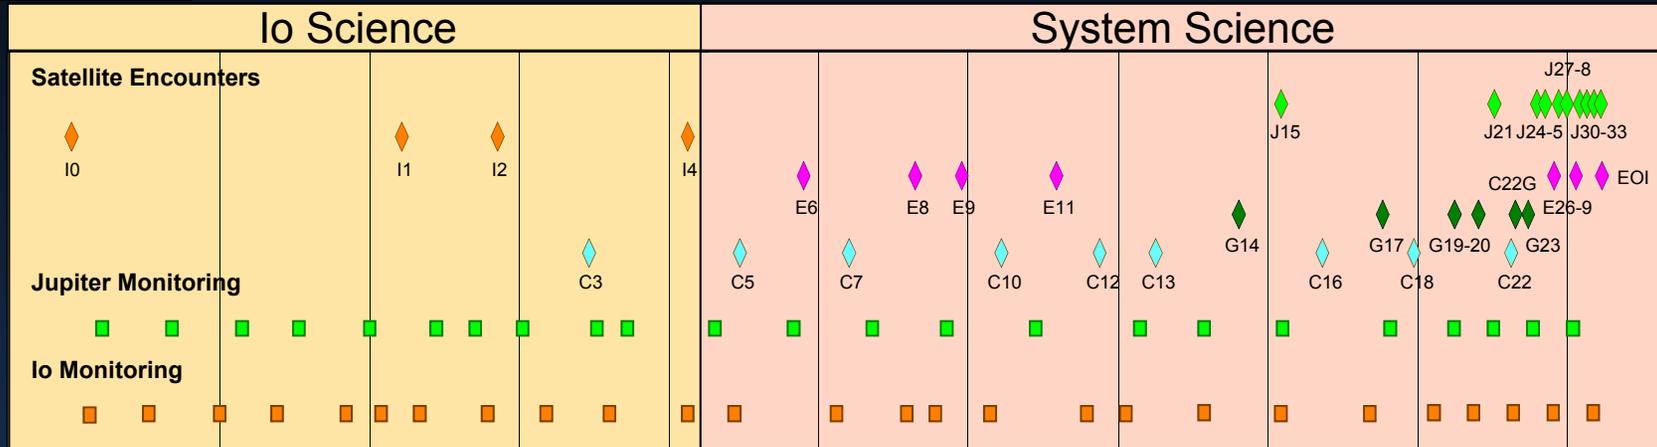

*Extensive opportunities exist to acquire Jupiter System Science*



# Baseline JEO Tour Satellite Science

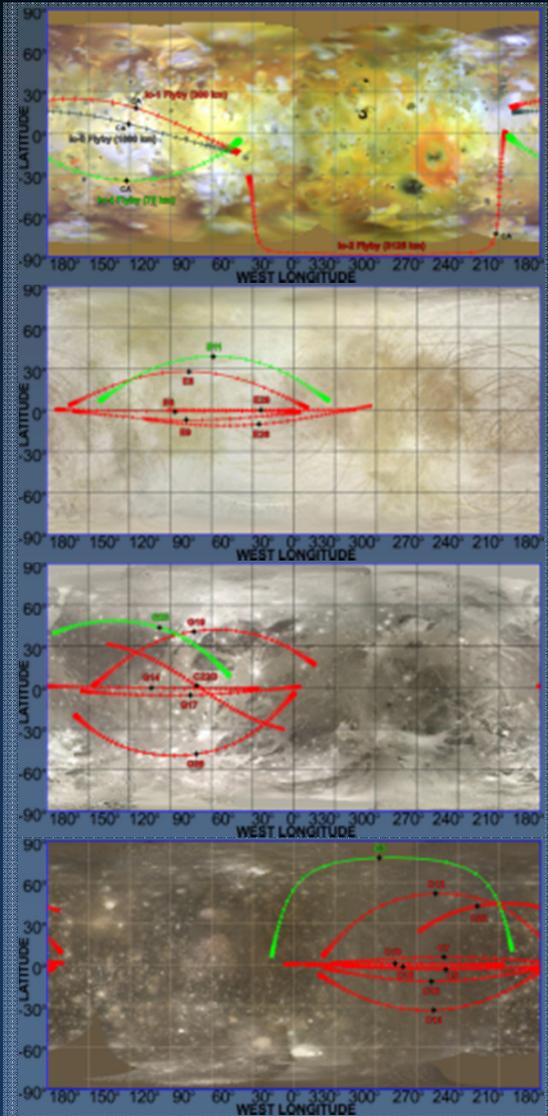



- Io: 3 flybys
  - Opportunities for imaging, IR spectroscopy, and altimetry
  - In situ analysis of extended atmosphere with INMS at 75 km
- Europa: 6 flybys
  - Radar and altimetry characterization and calibration
  - Imaging at up to 10–50 m resolution, NIR 250–1250 m
- Ganymede: 6 flybys
  - Radar sounding of grooved and dark terrains
  - Range of lats, lons for magnetosphere sampling
- Callisto: 9 flybys
  - High-latitude flyby for gravity field determination
  - Ocean characterization with magnetometer
  - Radar for subsurface structure of ancient cratered terrain

Satellite	≤1000m	≤200m	≤50m	≤10m	Length IPR (km)	Length LA (km)
Io	30%	20%	5%	-	1000	7400
Europa	60%	60%	15%	0.01%	6600	19000
Ganymede	50%	50%	10%	0.02%	17000	28000
Callisto	85%	75%	5%	0.01%	15000	30000



# Baseline JEO Europa Science Orbit

- 200 km altitude for early science in the first 28 days, then transition to a 100 km altitude
- Initial orbit at ~2:30 pm LST
- Inclination selected to balance lighting and coverage
  - $85^\circ \leq i \leq 95^\circ$  (selected  $95^\circ$  for slowest orbit rotation)
  - Orbit rotates 0.1 to 0.4 deg/day
- Ground track repeat cycle selected for ground track separation and global imaging coverage
  - Repeat cycle would be set for science needs, would be optimized when payloads are selected
  - 4-eurosol repeat at 200 km gives global coverage in 3 eurosols (~10 days) using every other orbit

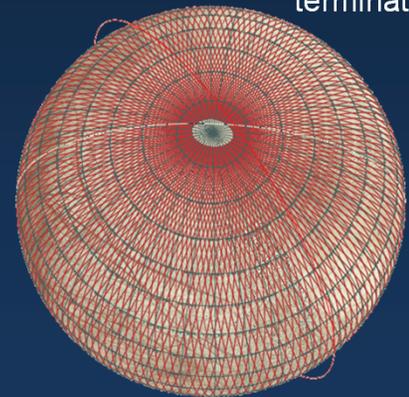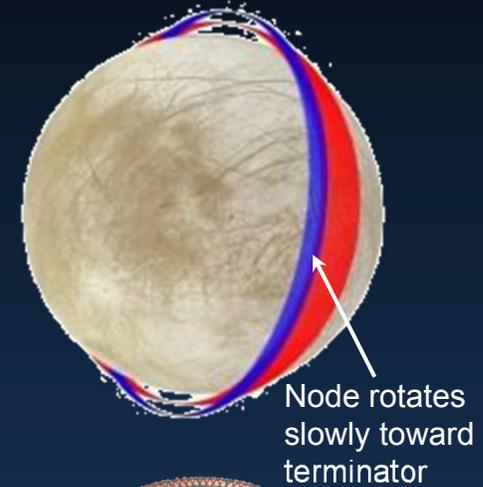


Groundtracks cover 95% of Europa surface


Poles could be imaged off-nadir (some layover)

Orbit Altitude (km)	Period (min)	Occultation Dur (min)	Orbits Per Day	Ground Speed (km/s)
200	138	46 (33%)	10.4	1.1
100	126	47 (37%)	11.4	1.3




# Notional Europa Science Campaigns

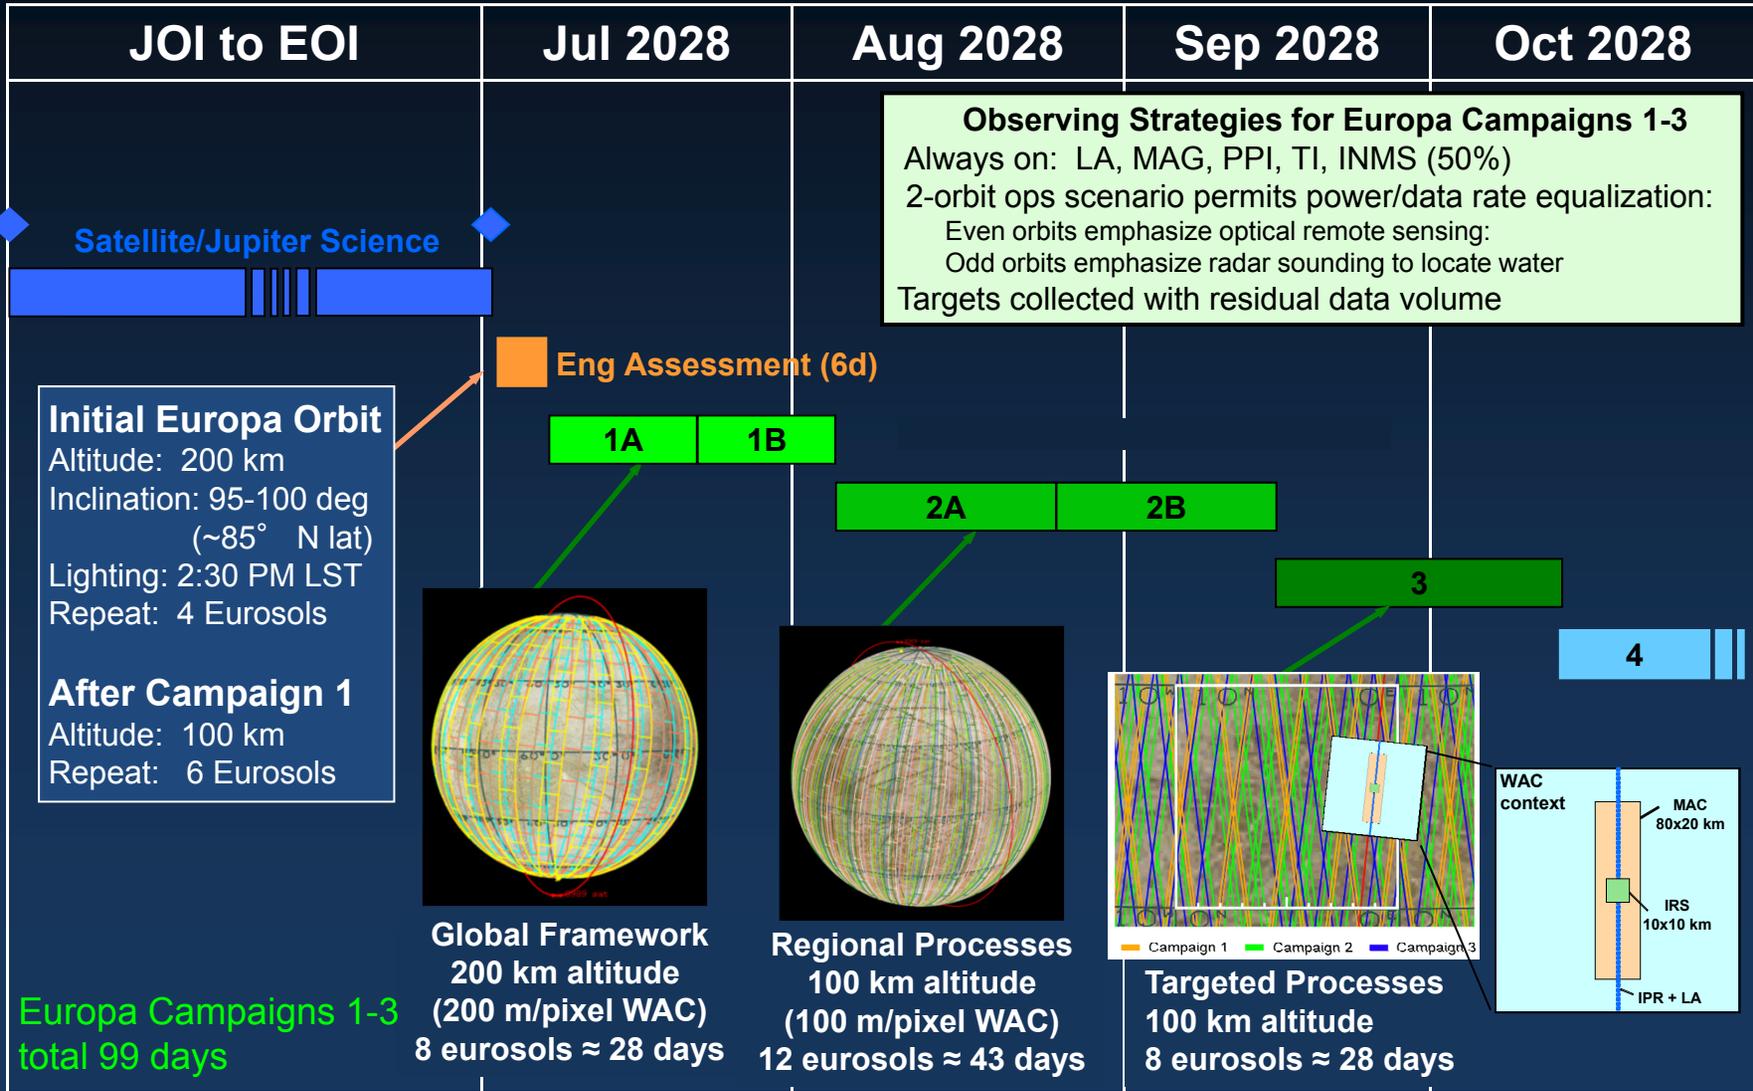



# Notional Europa Science Campaigns

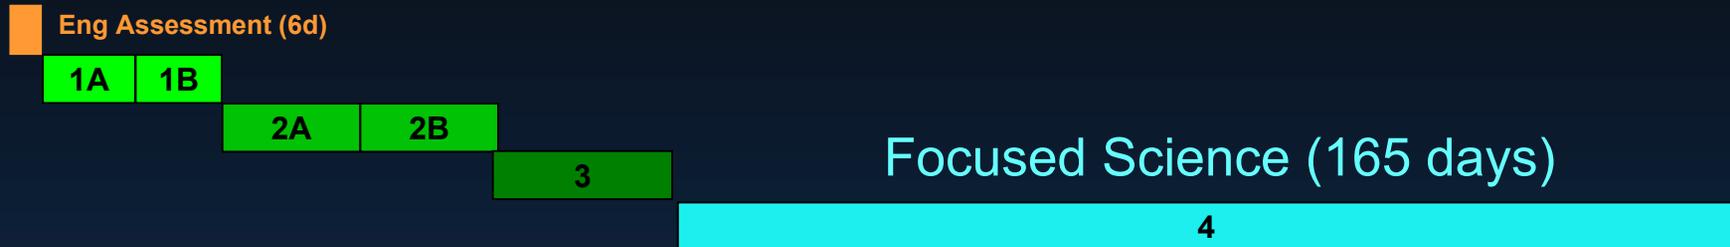

## By end of Europa Campaign 3:

99 days orbital science

4 global maps

- 2 @ 200m Color + Stereo
- 2 @ 100m Stereo

730 imaging and radar targets

18 km profile spacing for LA and TI


35 km spacing for IPR and VIRIS

400 UVS stellar occultations

700 Gb data return


- Follow up on discoveries
- Finer global and regional grid of profiling observations (IPR, VIRIS, TI)
- Continue gravity, laser altimetry, and fields and particles measurements
- Additional coordinated target sets
  - Investigate new discoveries and priorities
  - Characterize candidate future landing sites
- Off-nadir NAC stereo images
- Lower altitude operations
- Monitor Io and Jupiter, 1 to 2 times per week

*Extended time in Europa orbit allows additional investigations and exploration*




# JEO Spacecraft Key Technical Drivers


- Venus fly-by
- Radiation
- Planetary Protection
- Nadir Pointed Instrument Deck
- Real-time Science during Europa orbit
- 17 GB storage for Jovian tour
- 1 GB storage for Europa science

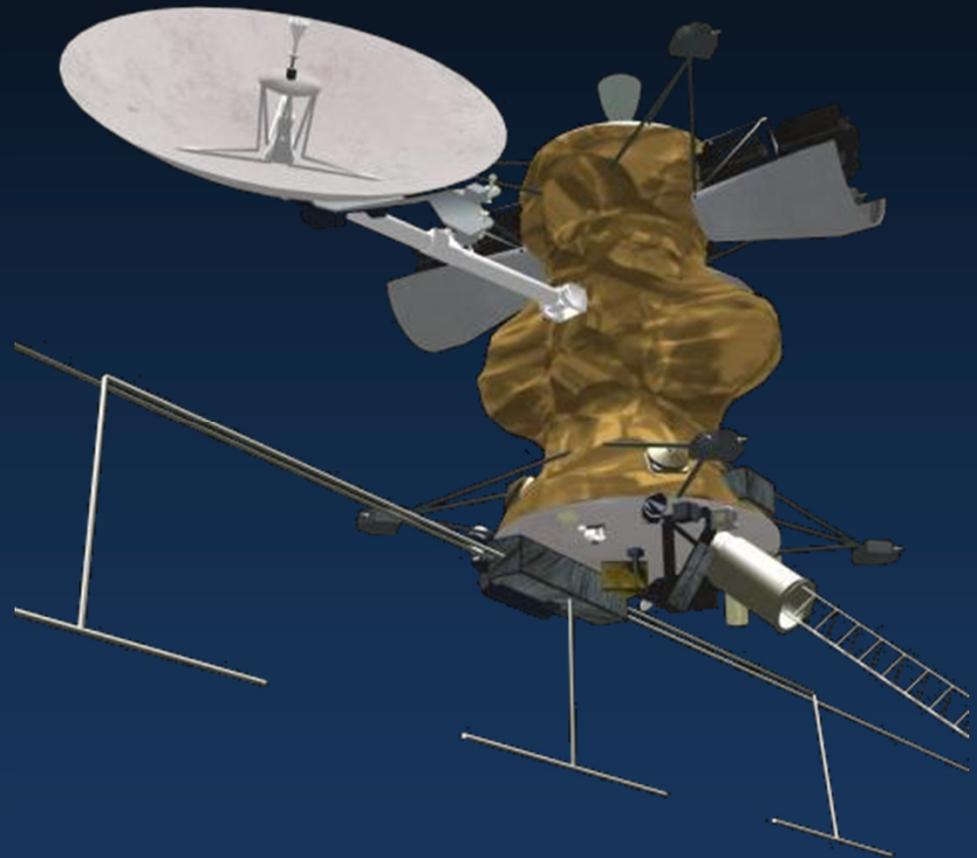

*Artist's Rendering*




# JEO Flight System

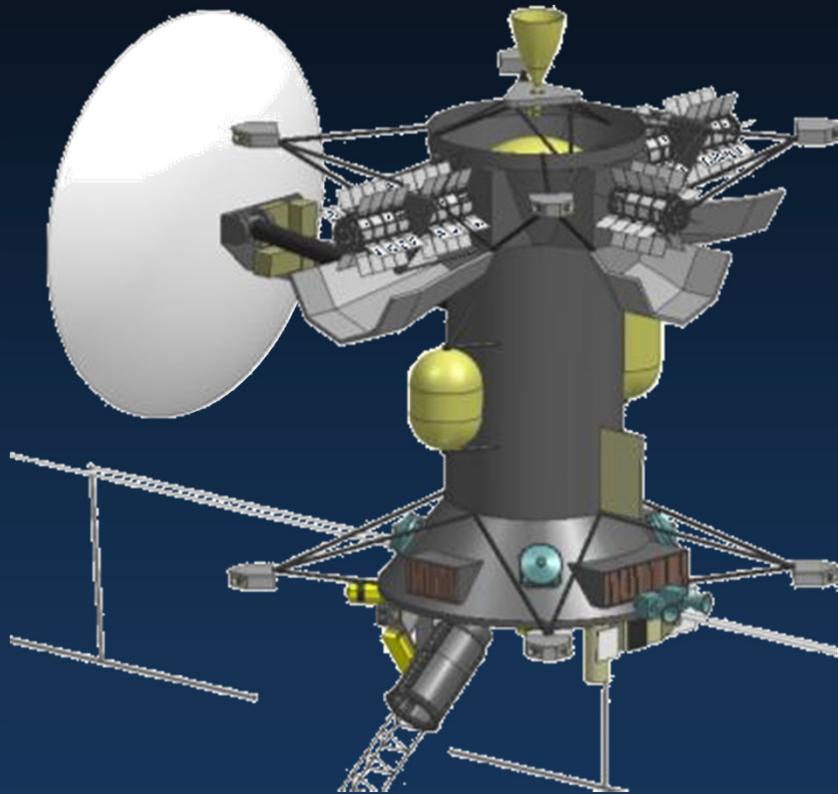


*Artist's Rendering*

- Three-axis stabilized with instrument deck for nadir pointing
- Articulated HGA for simultaneous downlink during science observations
- Data rate of 150 kbps to DSN 34m antenna on Ka-band
- Performs 2260 m/s  $\Delta V$  with 2646 kg of propellant
- Five MMRTGs provide 540 W (EOM) with batteries for peak modes
- Rad hardened electronics with shielding to survive 2.9 Mrad (behind 100 mil Al) environment
- 9 year lifetime
- Healthy mass and power margins (43%, >33% respectively)




# Payload Design Drivers

- 165 kg total mass
  - Including Contingency
- 71 W average power
  - Data Collection & Transfer
  - Actuators
  - Thermal
  - Stand-by
- Command and Data
  - Rad750 Processor
  - 17 Gb during Jovian tour
  - 1 Gb during Europa science
  - SpaceWire & 1553
- Pointing
  - S/C pointed Nadir during Europa science
  - Instruments must provide own articulation

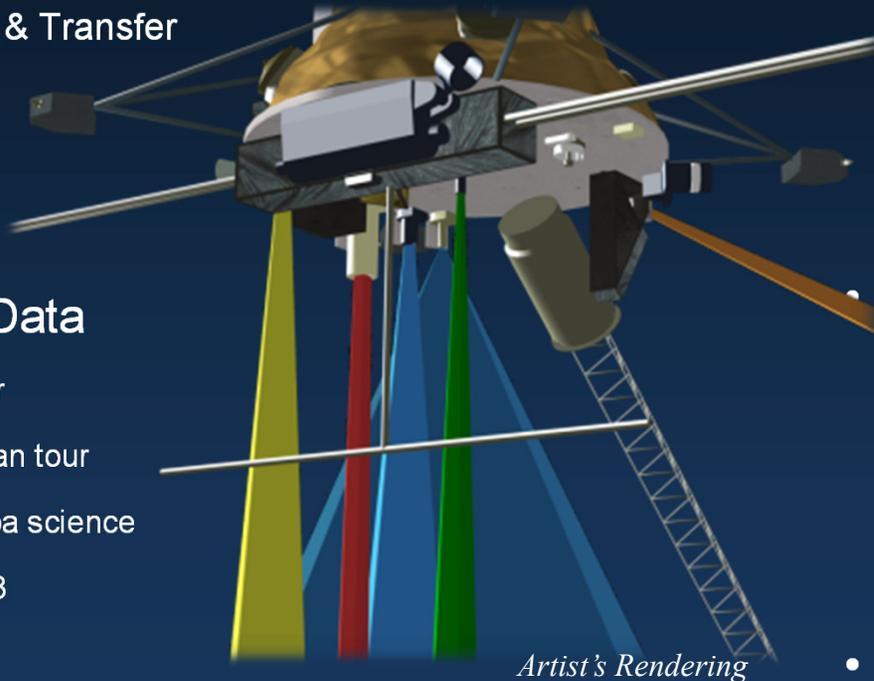

- Thermal
  - Instruments provide own heating/cooling
  - Passive thermal control preferred
  - Power for thermal comes out of 71 W average
- Radiation
  - Shielding mass comes out of 165 kg allocation
  - Most hardware will require more than 2.54 mm (100 mils) of shielding
- Planetary Protection
  - Instruments must be sterilized




# JEO Planning Payload

## JEO Instrument

Radio Science  
Laser Altimeter  
Ice Penetrating Radar  
VIS-IR Spectrometer  
UV Spectrometer  
Ion & Neutral Mass Spectrometer  
Thermal Instrument  
Narrow-Angle Camera  
Camera Package  
Magnetometer  
Particle and Plasma Instrument

## Similar Instruments


New Horizons USO, Cassini KaT  
MESSENGER MLA, NEAR NLR  
MRO SHARAD, Mars Express MARSIS  
MRO CRISM, Chandrayaan MMM  
Cassini UVIS, New Horizons Alice  
Rosetta ROSINA RTOF  
MRO MCS, LRO Diviner  
New Horizons LORRI, LRO LROC  
MRO MARCI, MESSENGER MDIS  
MESSENGER MAG, Galileo MAG  
New Horizons PEPSSI, Deep Space 1 PEPE



# Notional Science Scenarios


Driving scenario is the baseline Europa Science scenario

Europa Science 2-Orbit Scenario

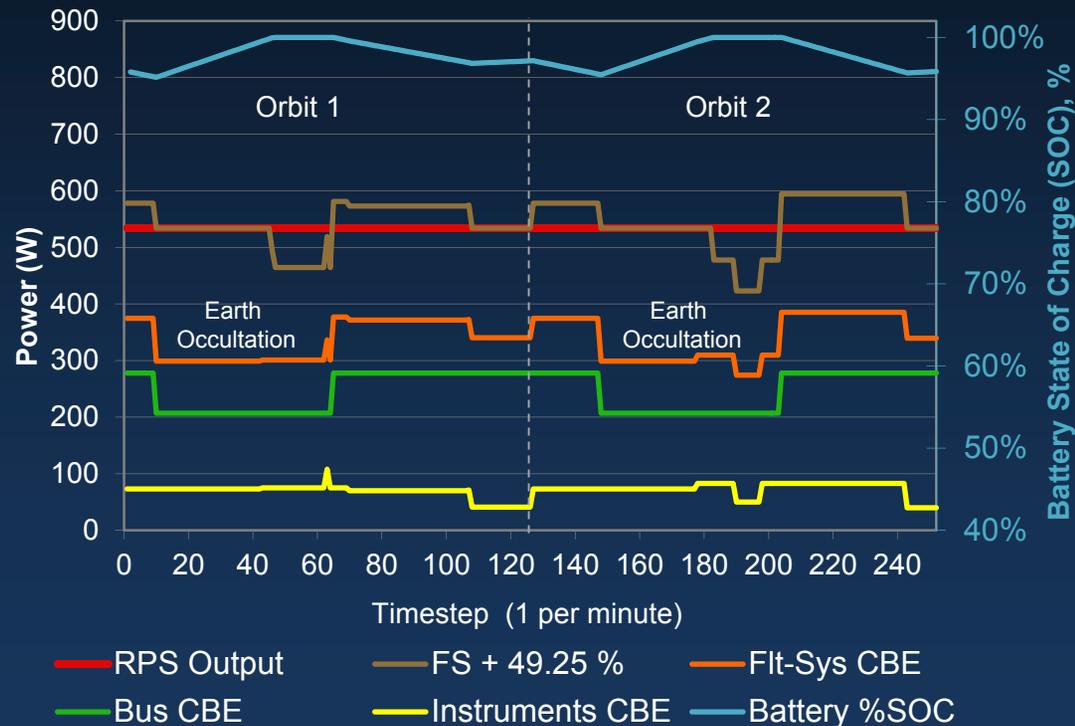


- Power is highly constrained
  - Limits instrument modes and downlink data rates
- Science observation scenario is data storage limited
  - Data is transferred real-time to the ground
- 2-orbit operations scenario permits power/data rate balance

*Evolving science scenarios will be limited by power and data storage*



# JEO Mission Concept Risk Assessment

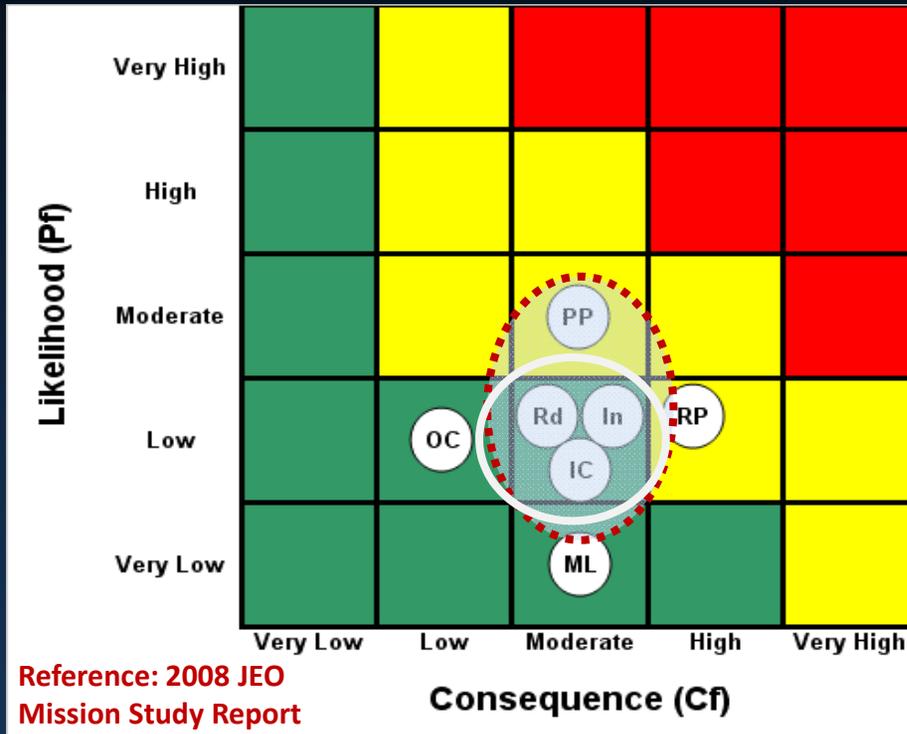

- “Rd”, “IC” and “In” are radiation related risk categories
- Instrument Development is one of the three radiation risk categories
- PP compliance requires in-flight sterilization via radiation

## Risk Categories

Rd Radiation effects in parts, materials, & sensors  
 IC Internal charging  
 In Instrument development

PP Planetary protection  
 OC Operational complexity  
 RP Radioisotope power source  
 ML Mission life time


*Radiation and PP are major risk categories for the JEO mission concept*



# Major Components of Approach to Radiation Challenge

- Risk Mitigation Plan (Starting in Pre-Phase A)
  - Early emphasis on reducing risk
  - Periodic peer reviews of plan
- Early emphasis on Instrument development
- Management and System Engineering Teams augmented
- External Advisory Board of Experts
- Extended schedule
- Increased cost for parts, testing, analysis, redesign
  - No heritage
- Design Approach
  - Rad-hard by Process
  - Rad-hard by Design
  - Rad-Hard by Shielding
  - Rad-hard by “System”

**Challenge being addressed as a “system”**



# System Design Process

Analysis

## Input Variables

- Science Objectives
- Mission Design—Environment
- Launch Vehicle Capabilities
- Part Capabilities

## Dependent Components

- Shielding Design
- Instrument and Circuit Design
- Margin Assessment
- Risk Analysis
- Cost Analysis

Iteration

- System design iterative process continues through Phase B as capabilities evolve and science instrument capabilities solidify
- Acceptable cost and risk posture is a joint discussion between project and NASA Headquarters



# Risk Mitigation Plan

## Key Elements and Sample Accomplishments

- Risk Mitigation Plan: Radiation and Planetary Protection**

- Focuses on Pre-Phase A activities
- Defining & validating approach
- Obtaining data

### 1.0 System Reliability Model

### 2.0 Environment and Shielding Model

### 3.0 Radiation Design Methods

### 4.0 Sensors and Detectors

### 5.0 Parts Evaluation and Testing

### 6.0 Approved Parts and Materials List (APML)





Signal Chain  
Circuit  
Breadboard

Developed and validated worst-case analysis as part of radiation tolerance design methodology



Image from hardened CMOS test array after 1 Mrad TID provides proof of concept for JEO science imagers


*Radiation-tolerant design methodology developed and validated in the laboratory provides design guidelines for subsystem and instrument providers*



# 2009 EJSM Instrument Workshop

- Purpose of the Workshop
  - Prepare the instrument provider community to be ready to propose to the JEO and JGO opportunities
  - Enable an interaction between the radiation capability community and the instrument providers
- Topics covered
  - Background and Context
  - System Engineering, Radiation and Planetary Protection Challenges
  - Designing for Key Challenges
  - Instrument Solicitation and Expectations
- Attendees
  - Over 275 people attended
  - 38 radiation capable companies/vendors had posters or booths
- All presentations, registrant list can be downloaded from the web


[opfm.jpl.nasa.gov](http://opfm.jpl.nasa.gov)



# Sample Documents Available for Download

Theme	Title	Download
System	EJSM Risk Mitigation Plan: Radiation and Planetary Protection	
	Return to Europa: Overview of the Jupiter Europa Orbiter Mission	
	Radiation Challenges and Risk Mitigation for the JEO Mission	
Environment	Jupiter Europa Orbiter Radiation Environment	
Radiation Effects	Designing Circuits and Systems for Single Event Effects	
	Test Method for Enhanced Low Dose Rate Sensitivity (ELDRS)	
	Radiation Effects on Detectors and Key Optical Components	
Design Guidelines	Avoiding Problems caused by S/C on-orbit Internal Charging Effects	
	EJSM Radiation Design Guidelines	
	Total Dose and Displacement Damage Design Guideline	soon
	ASIC via FPGA <i>Guideline</i> with Addendum on Europa	
	OPFM Long Life Design Guidelines	
Parts	Memory Investigation for JEO Mission	
	JEO Parts Program Requirements	
	Approved Parts and Materials List	Limited access

[opfm.jpl.nasa.gov](http://opfm.jpl.nasa.gov)



## Near-Term Timeline

- Instrument workshop #4, Summer 2010 timeframe in the Pasadena, CA area
- Increased JEO technical efforts on
  - APML, parts testing and evaluation
  - Core components identification (power converters, microprocessors, FPGAs/ASICs)
  - Shielding approach for sensors/detectors
  - System modeling
- JEO Mission Concept Review, September 2010
- JEO Mission Phase A start, January 2011
- JEO Payload Announcement of Opportunity release, January 2011