Deep UV Penetration Depth in Astrobiologically Relevant Rocks & Minerals

Juliana Capra
Jet Propulsion Laboratory,
California Institute of Technology
Mentor: William Abbey
Summer 2011
CSU STAR Program

The Ultimate Question

What is the attenuation rate (gradual loss of intensity) of ultra-violet light as it transmits through rock or mineral samples (such as basaltic rocks)?

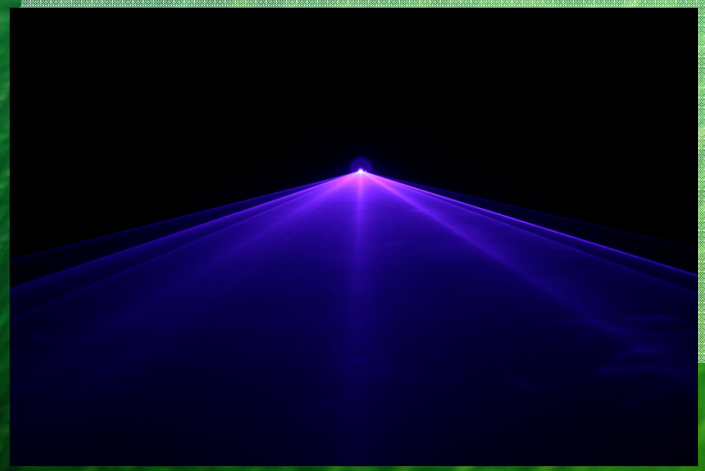

Why does this matter?

We hope that this study will eventually…

Prove that using Deep UV fluorescence is

- **non-invasive**
- **appropriate**
- **effective** means **to identify**
  - mineral content
  - organics

Someday be an In-situ technique to use on Earth or Mars?

What is Deep UV Fluorescence?

Using laser light that has a wavelength less than ≈250nm (also known as Deep Ultraviolet).

The laser ‘excites’ the sample,

The light is absorbed, and

Some of the light is emitted or fluoresced.

Fluorescence: emission of light by a substance that has absorbed light

How DUV fluorescence works…

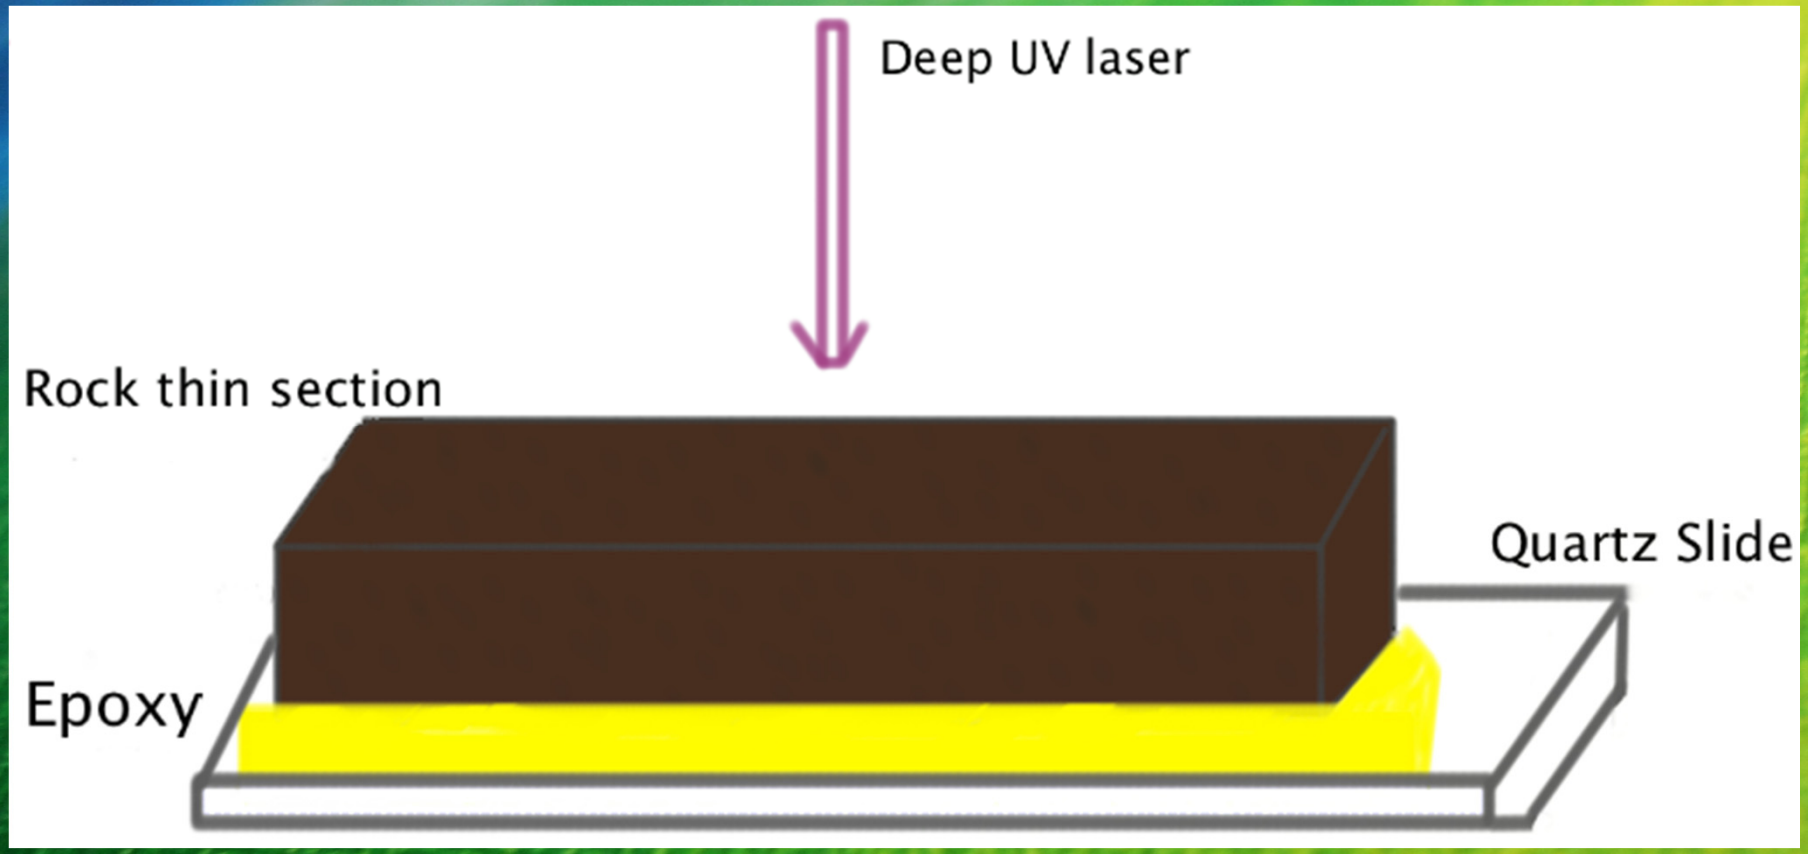

** Illustration not to scale

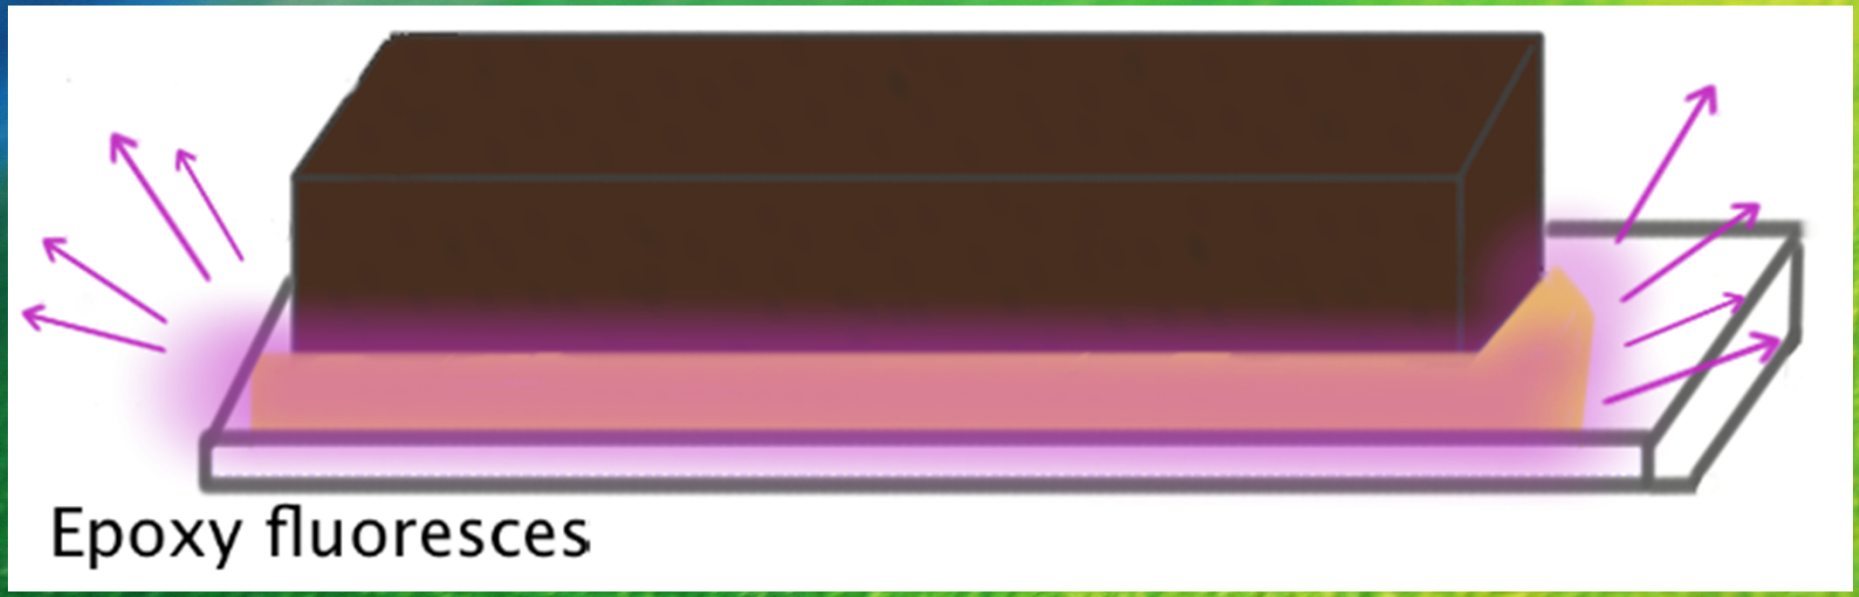
Epoxy fluoresces

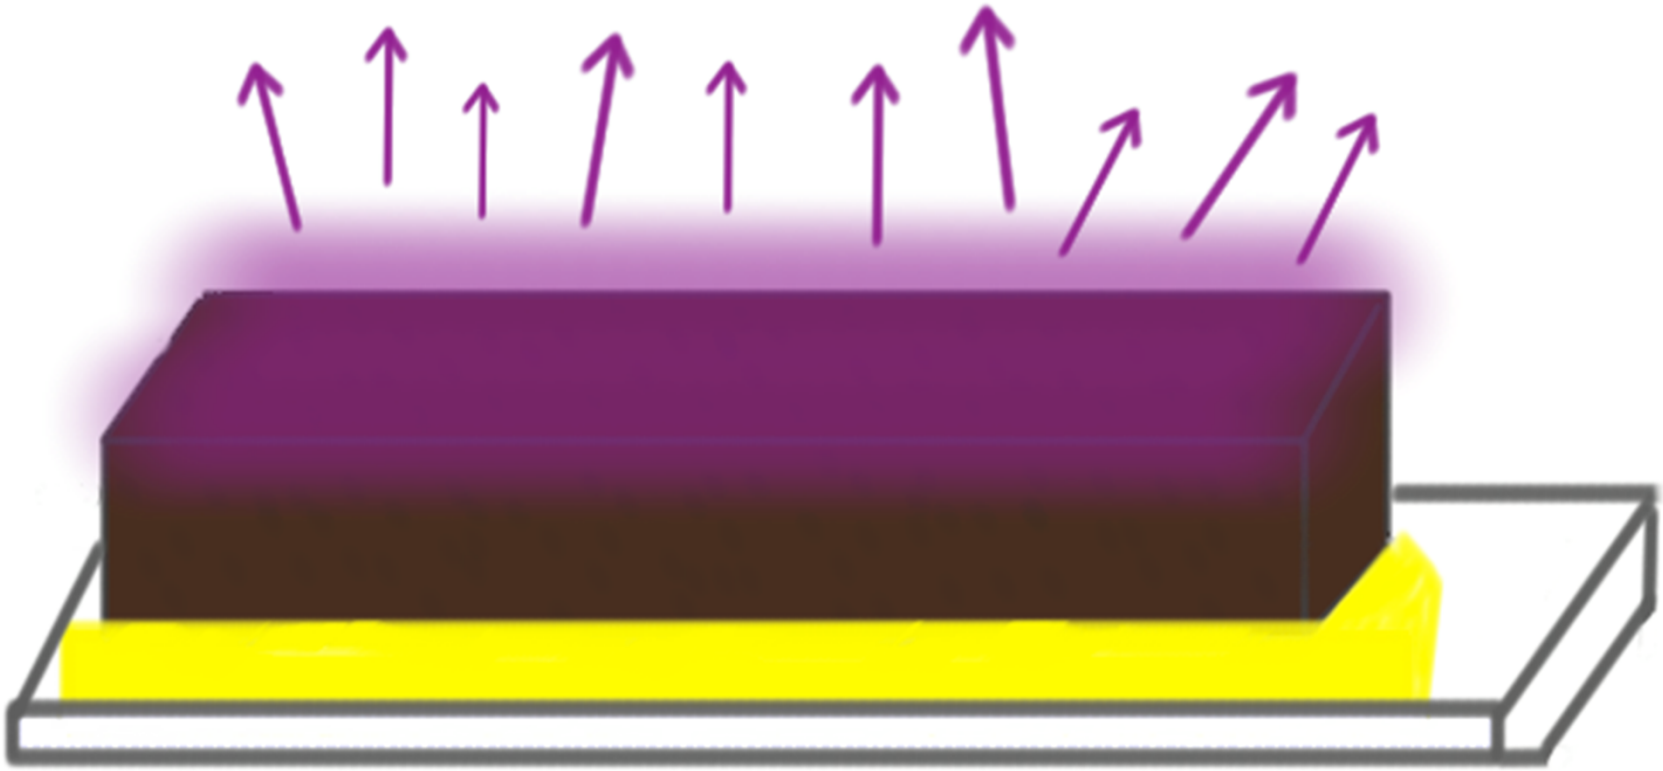

Thin section fluoresces

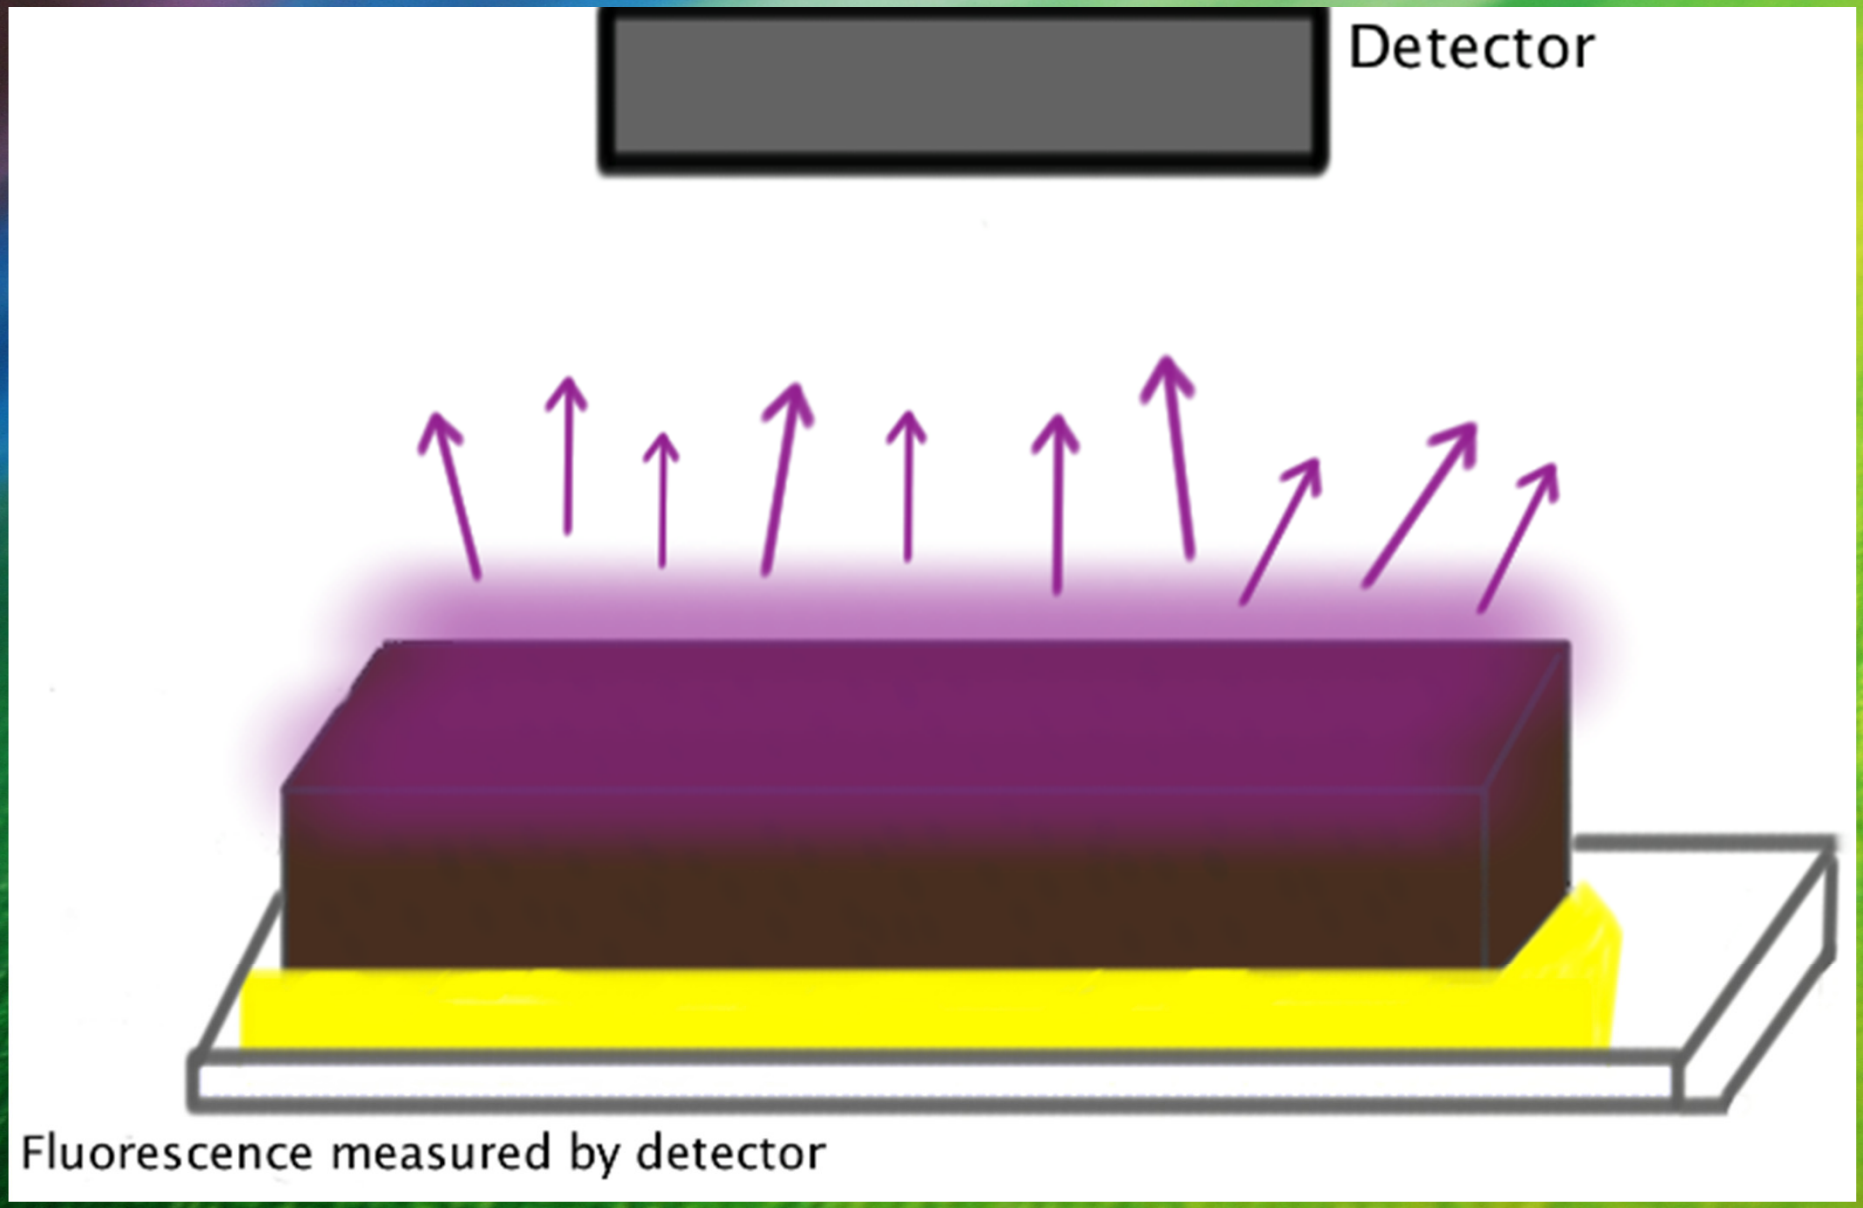
Detector
Fluorescence measured by detector

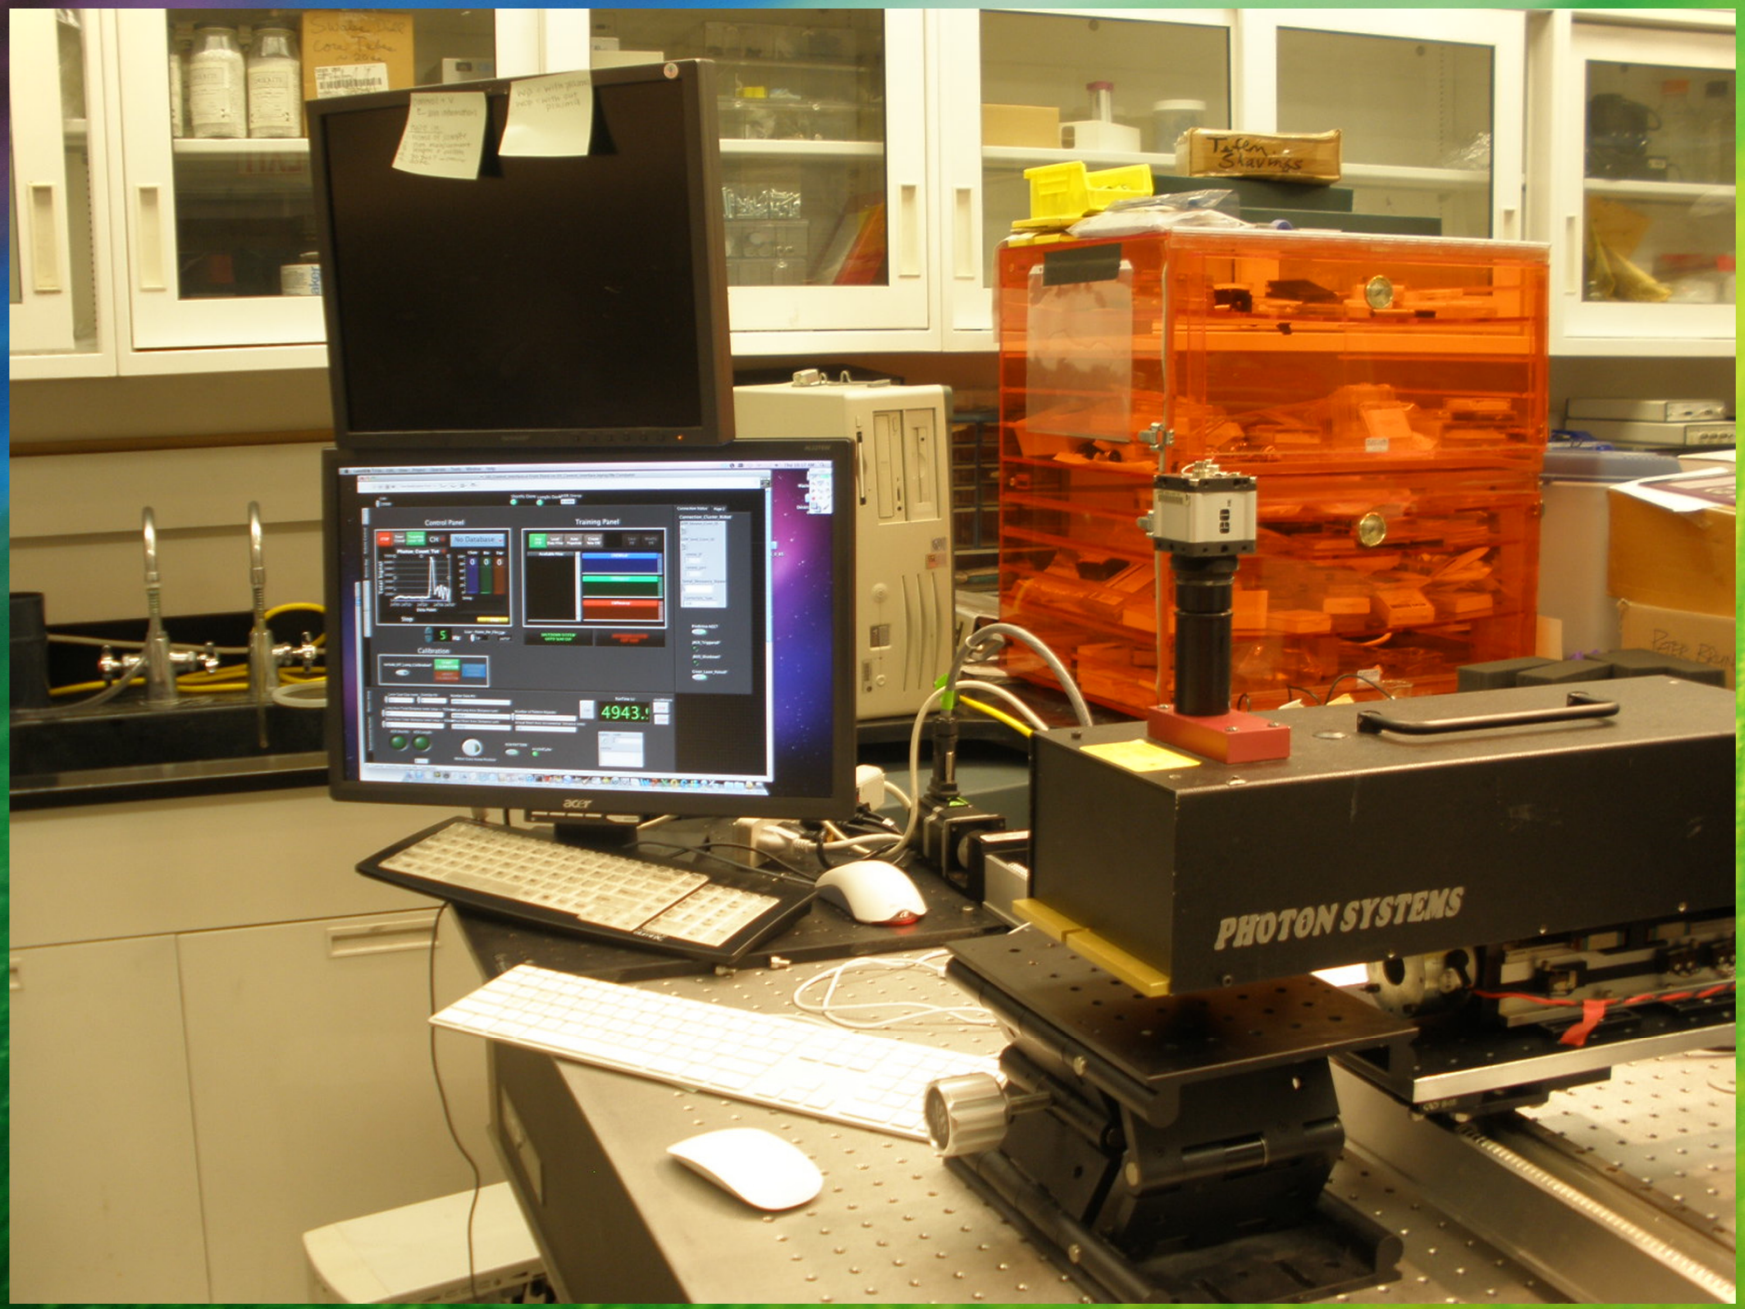
Control Panel
Training Panel
4943.
PHOTON SYSTEMS

Methodology

- Read about rock samples (Saddleback and Belleville Basalts)
- Create rock slabs to study the mineral composition of the rock samples
- Create thin section samples.
- Use Raman spectrometer
- Measure fluorescence of rock thin sections with Deep UV Laser instrument
- Use Petrographic microscope
- Field Research

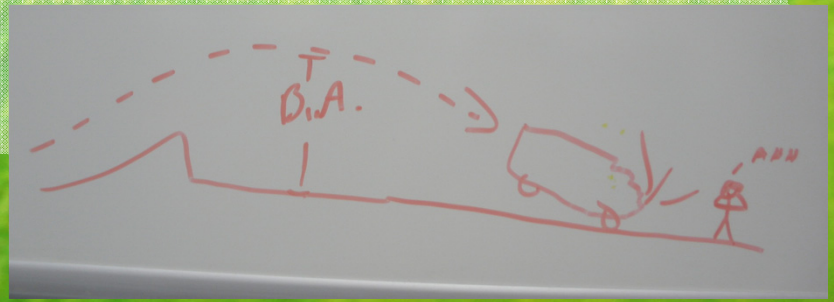

Thin section prep

Belleville Slab (Ready for thin section!)

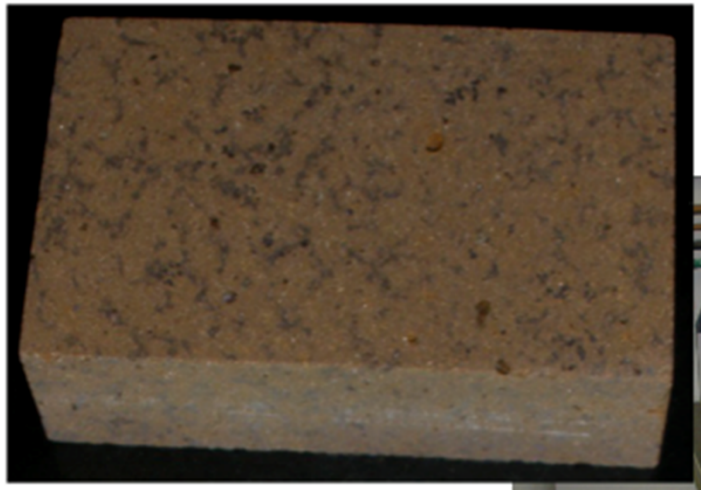

40mm x 24mm x 1.5cm

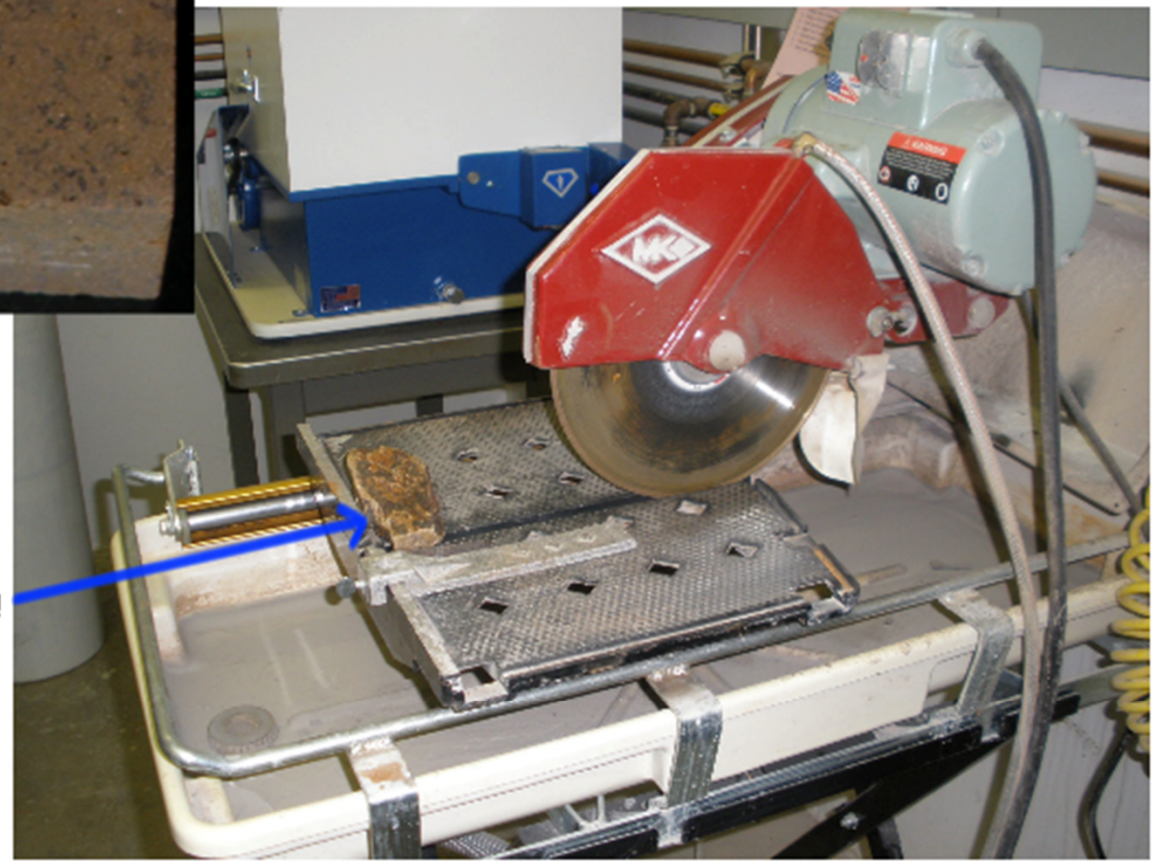

Rock sample ready for cutting!

Standard issue Tile Saw

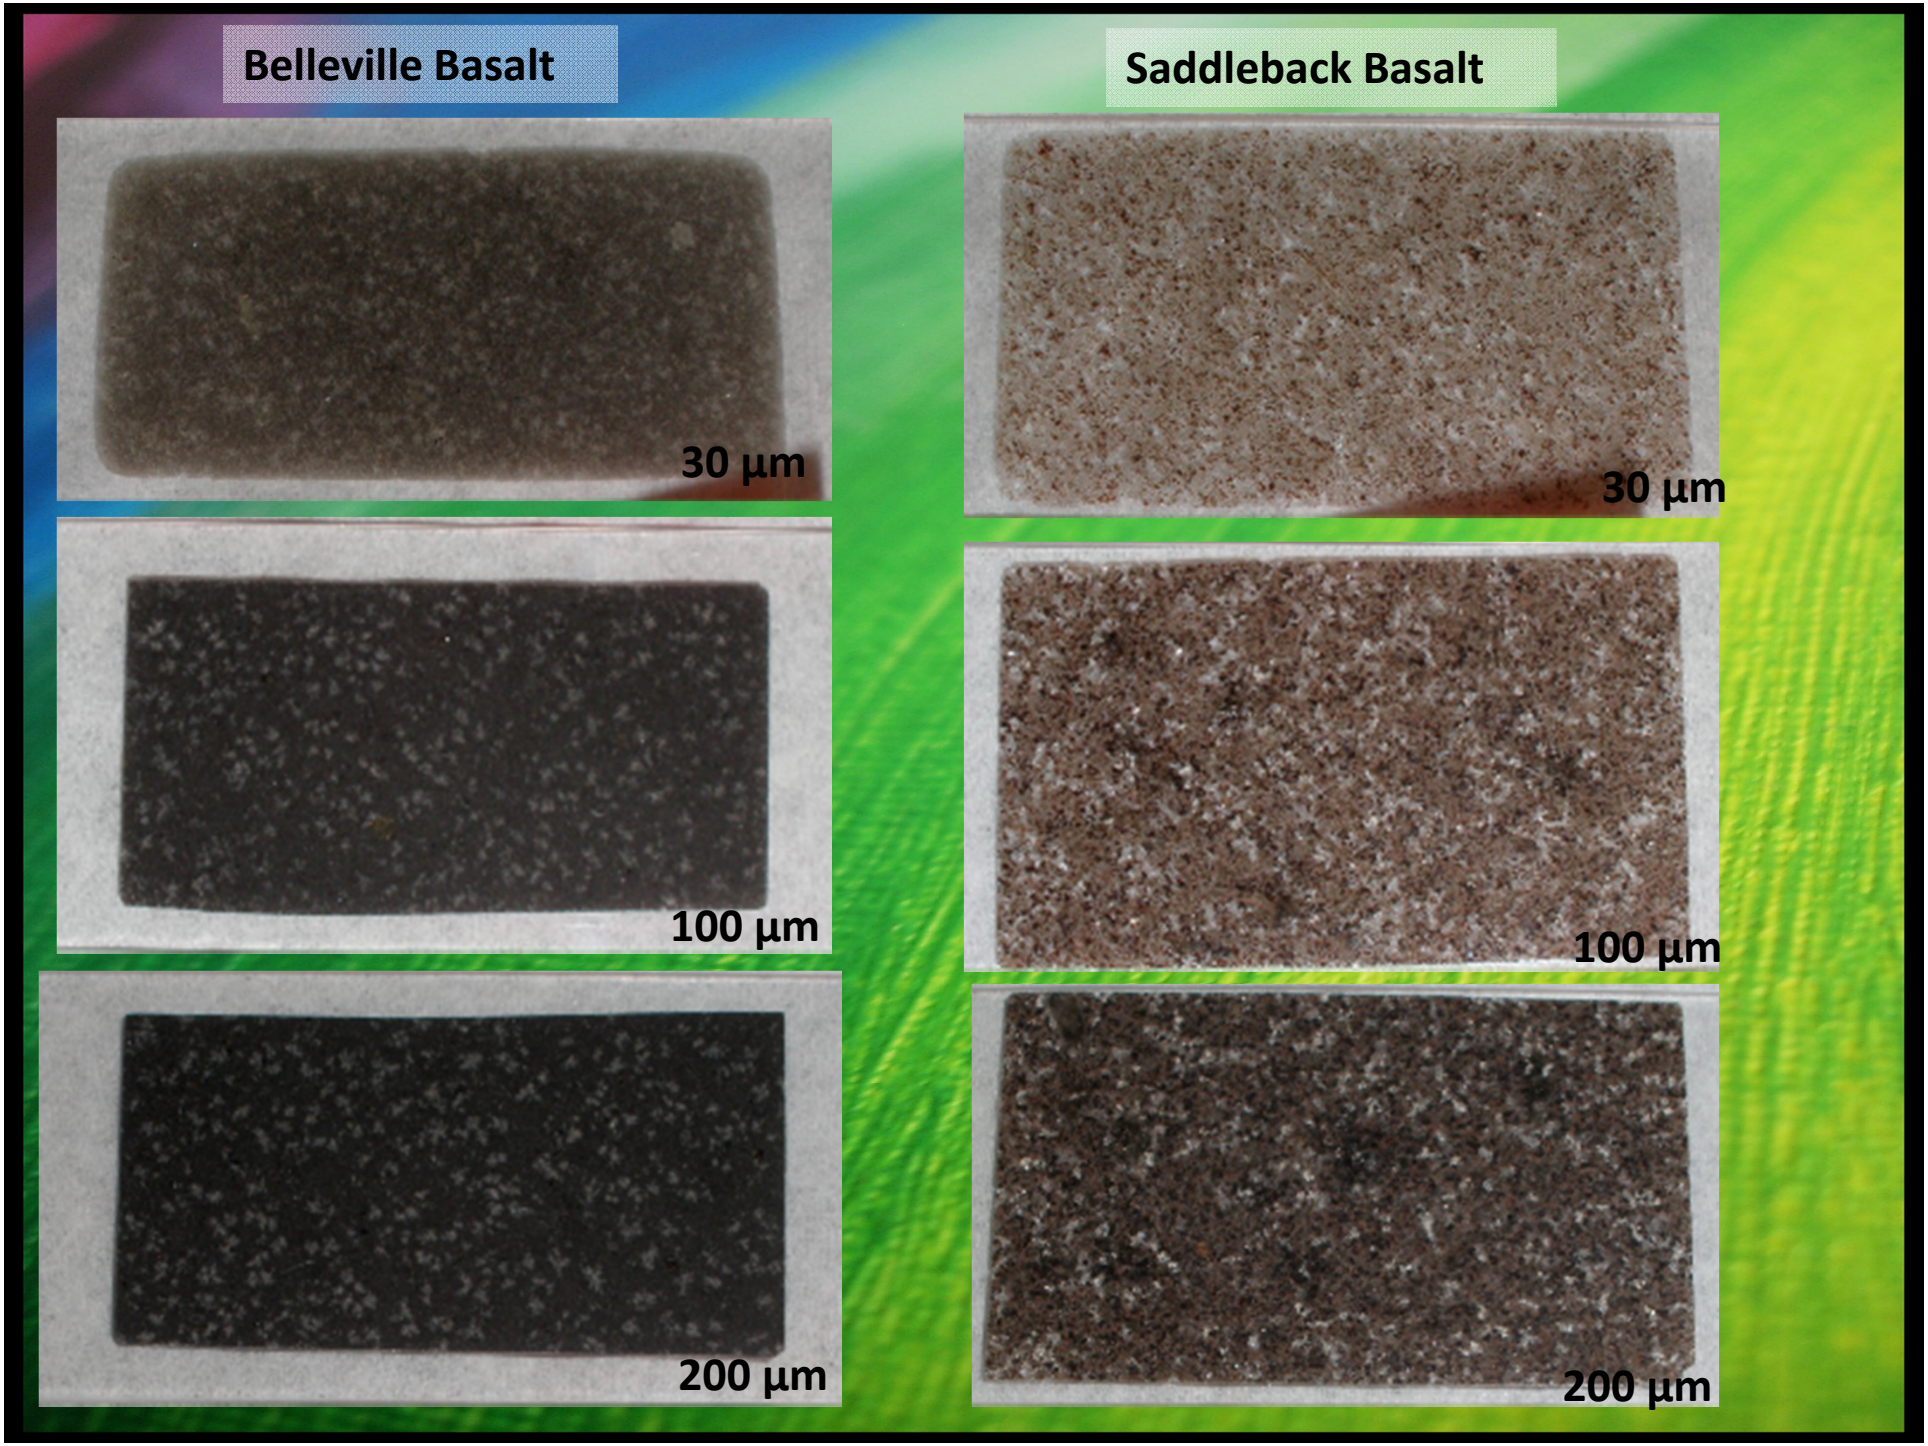
Belleville Basalt
Saddleback Basalt
30 µm
30 µm
100 µm
100 µm
200 µm
200 µm

Raman Spectroscopy

After learning about the minerals typically found in the basalt samples (plagioclase feldspars and pyroxenes) my research team and I used the **Raman** Spectrometer to take **point spectra to identify** what **minerals** are **present** in the rock slabs.

*Each **mineral** has a **unique spectrum** with peaks at certain wavelengths.

By examining the spectrum and making note of where significant peaks are located, we can **identify** what **mineral** is present.

We do this over and over again at different locations on the rock slab to get a grasp of what minerals are present.

How the Raman works…

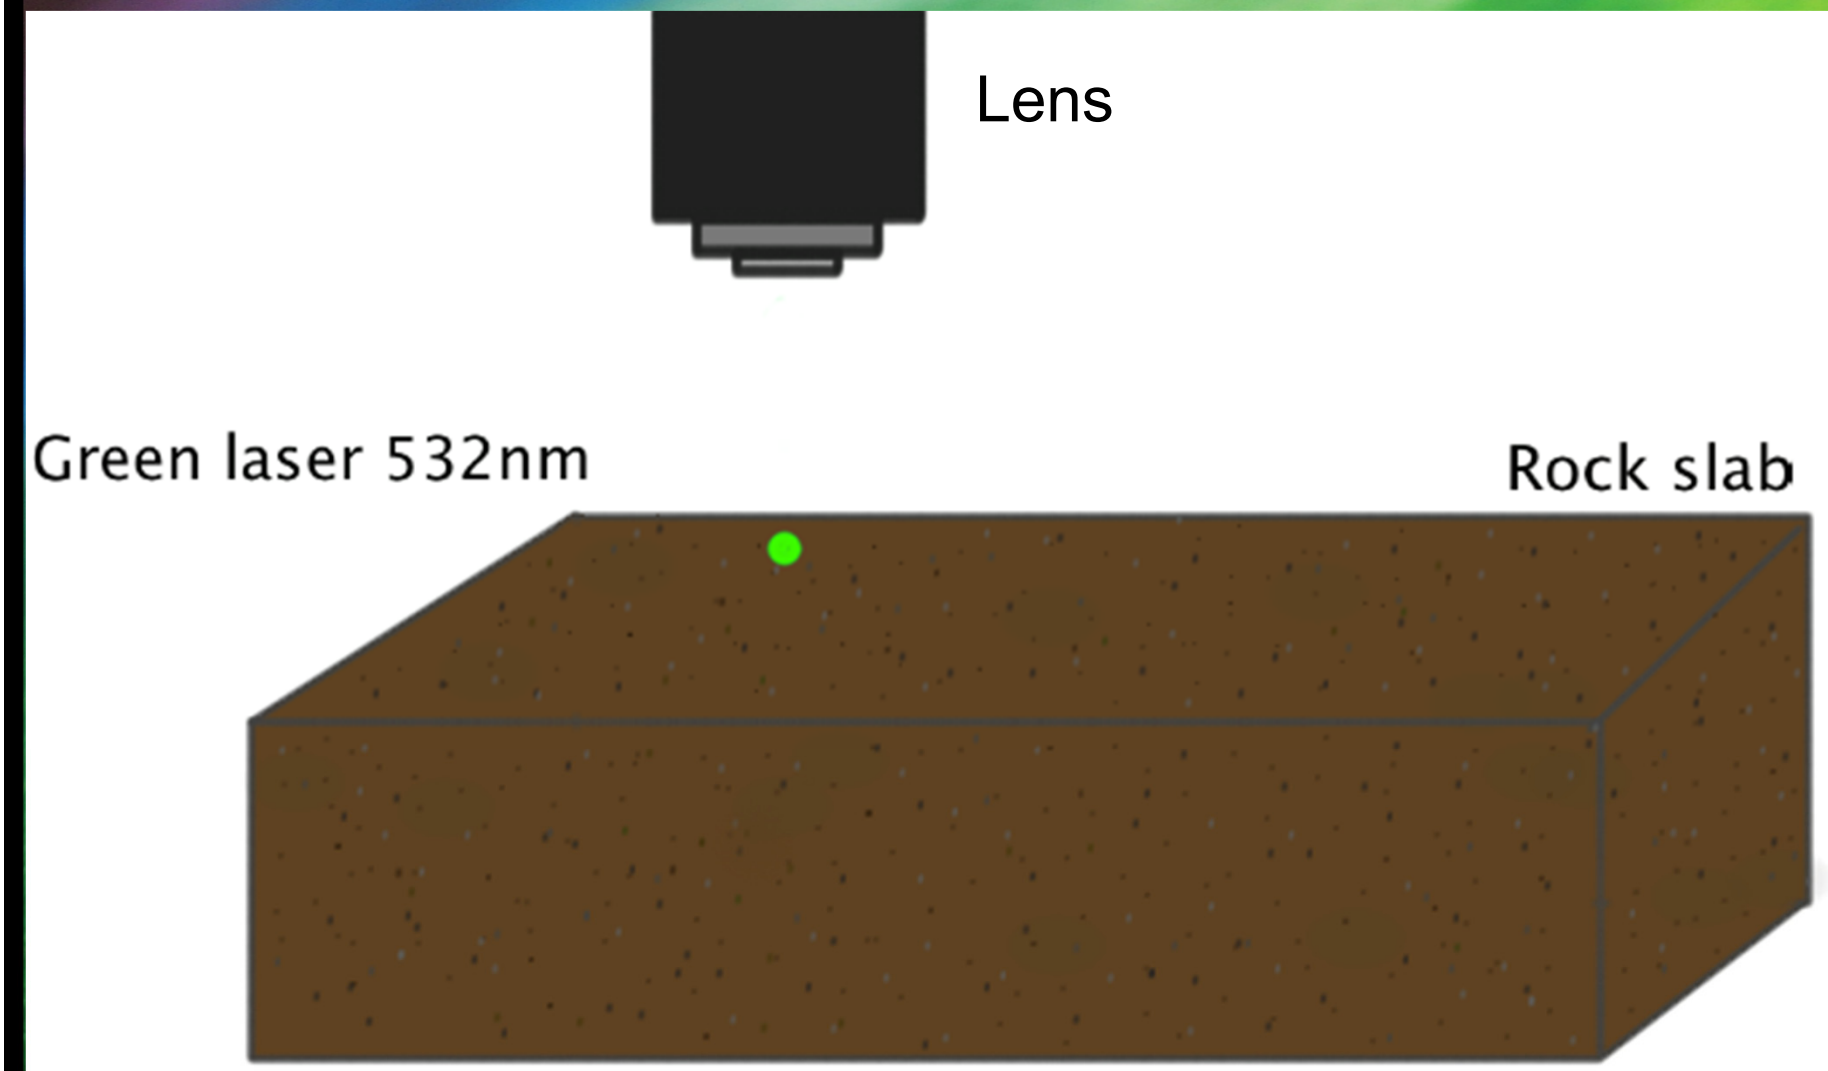

Select a spot to take a point spectra

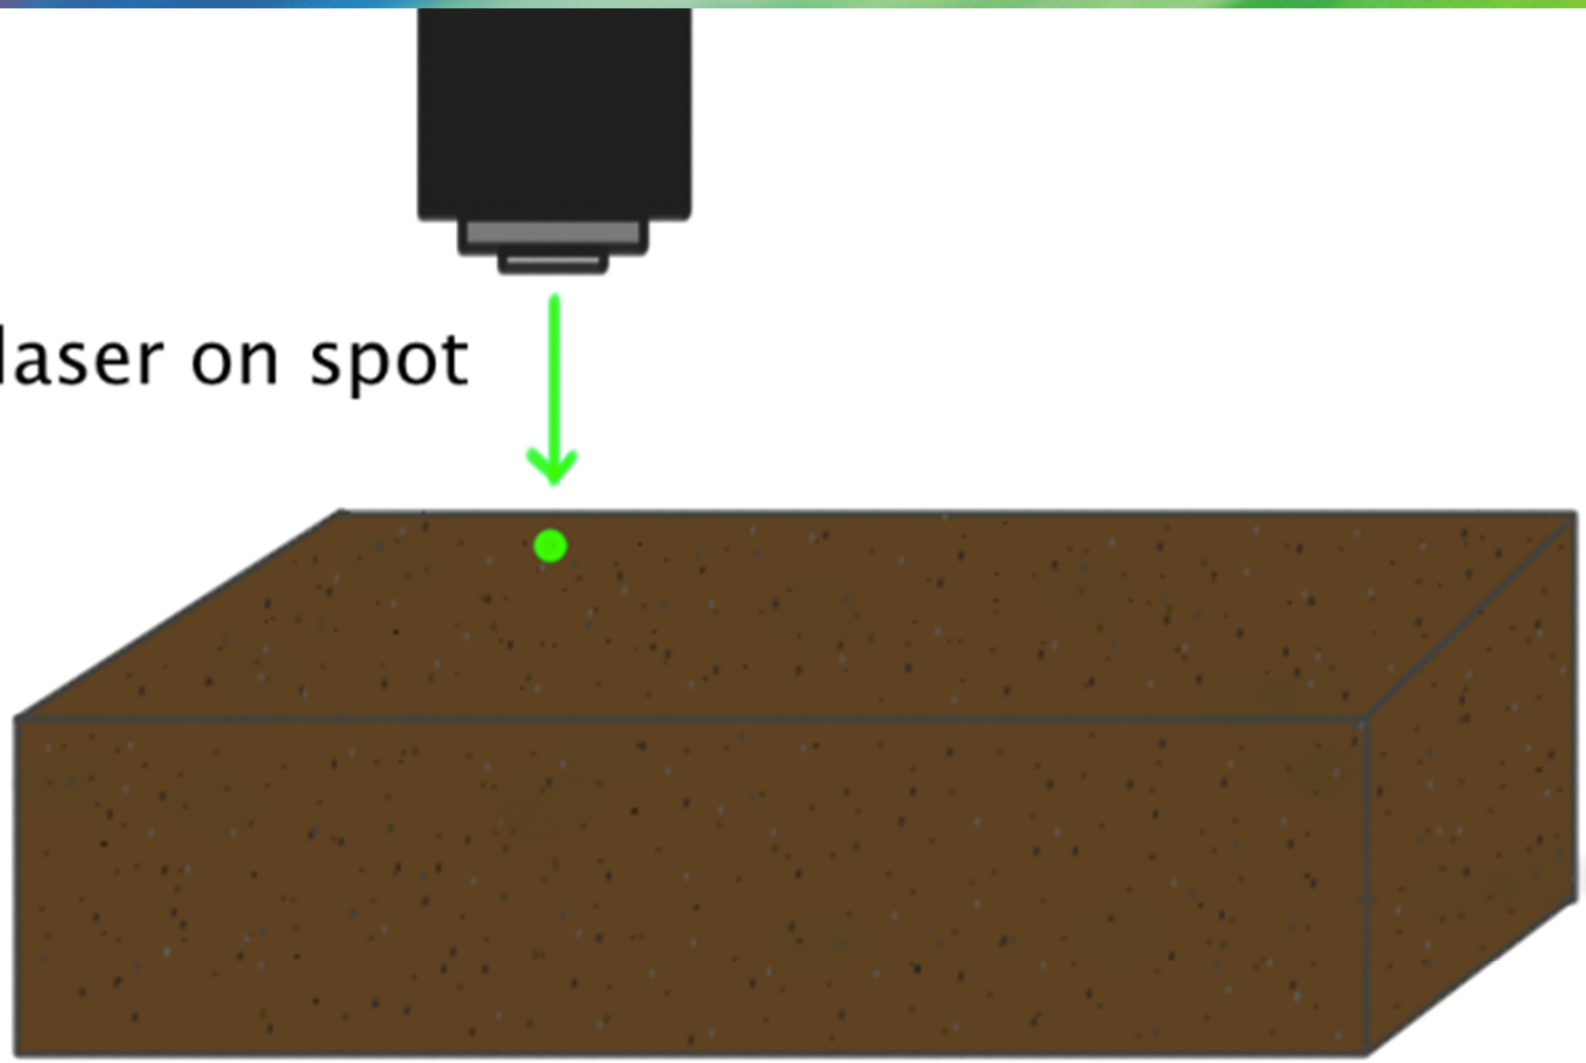

Sample area is 'excited' by the laser.

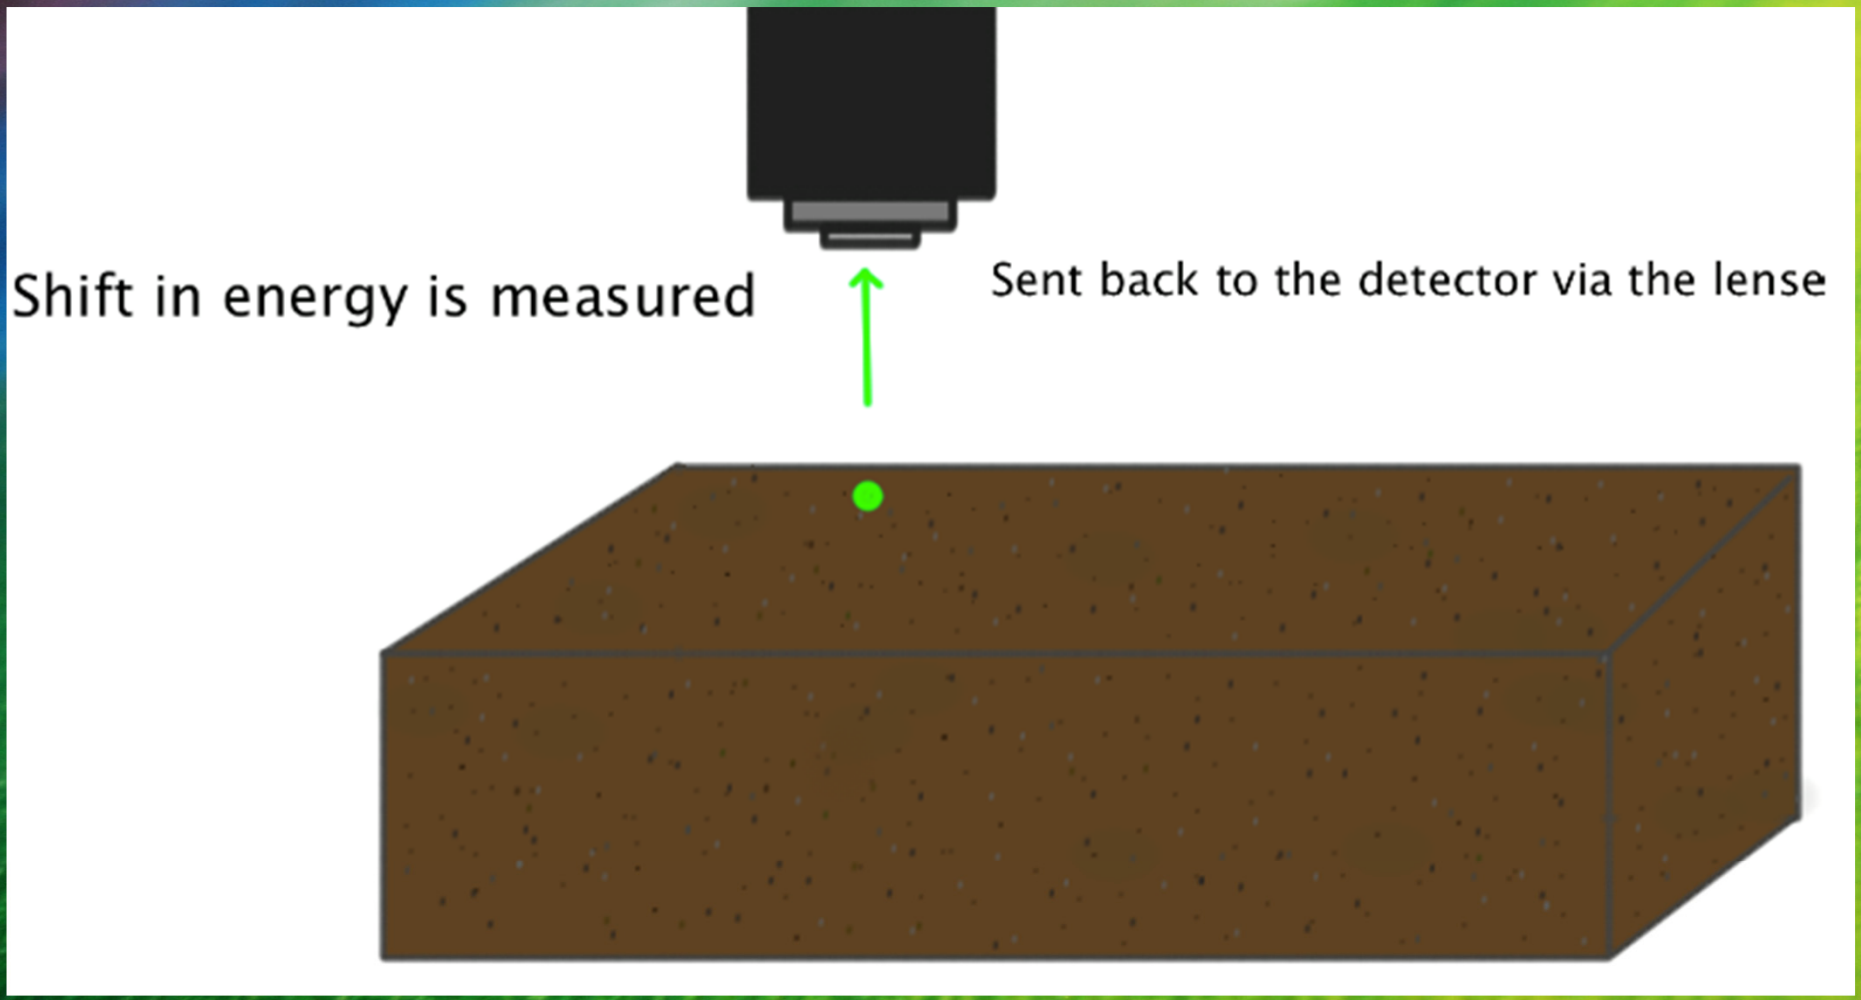
Shift in energy is measured
Sent back to the detector via the lense

Saddleback Basalt Slab

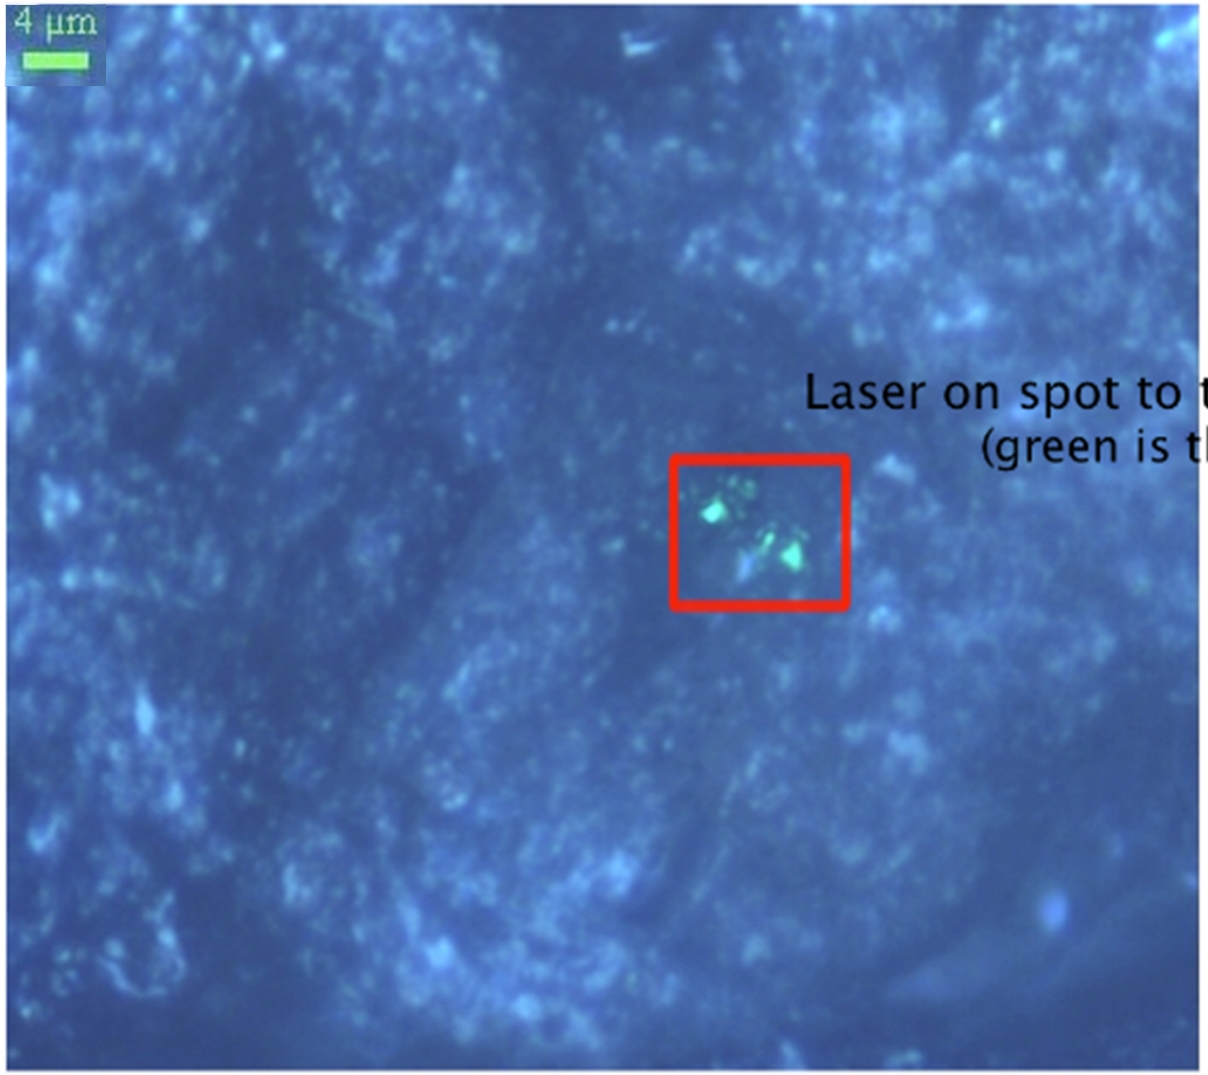

Laser on spot to take spectra
(green is the laser)

Spot size ≈ 12µm

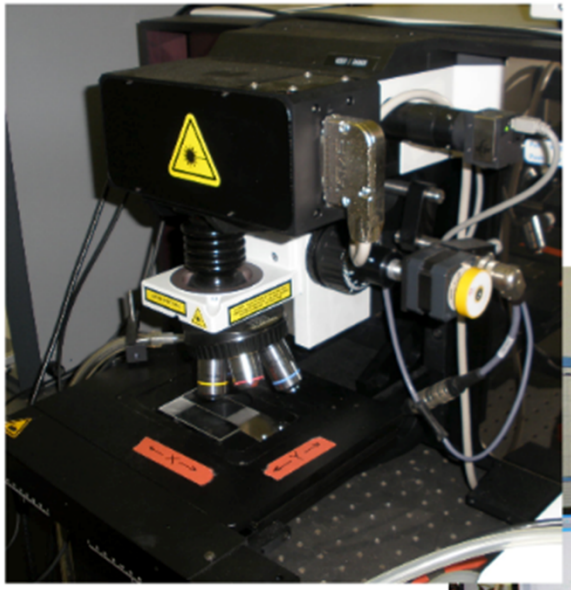

Camera, Lenses, and Laser apertures

Detector and Chiller

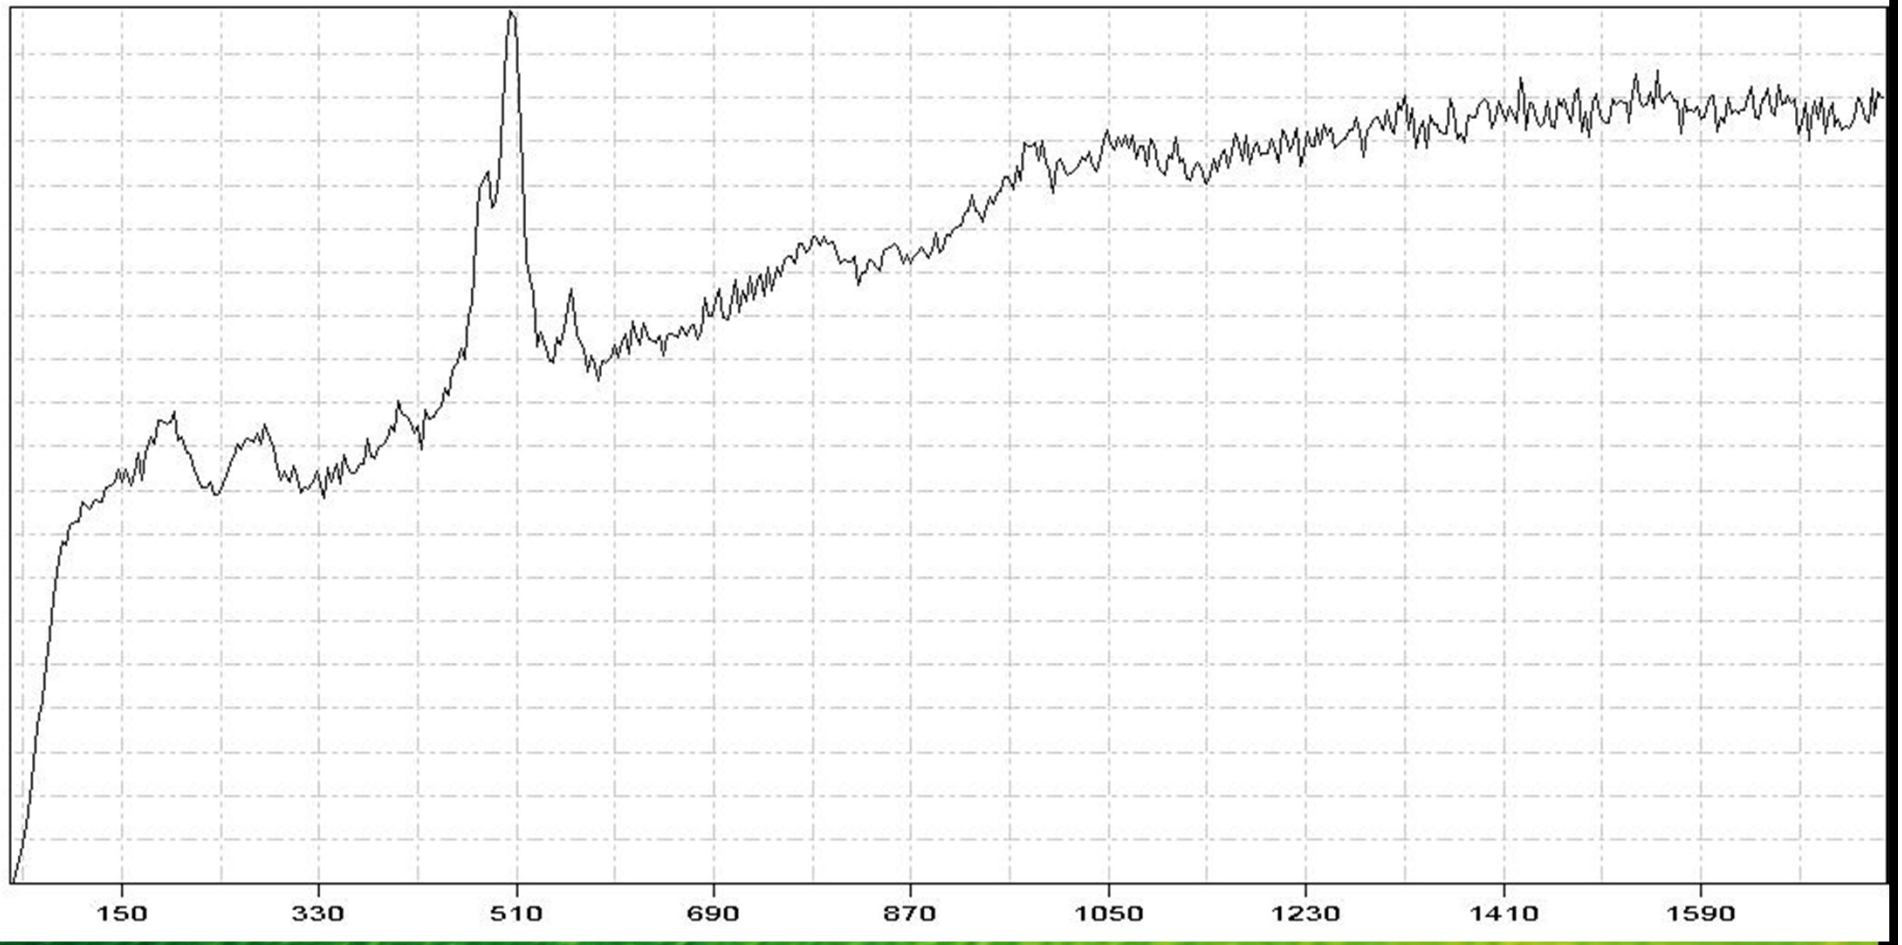
150
330
510
690
870
1050
1230
1410
1590

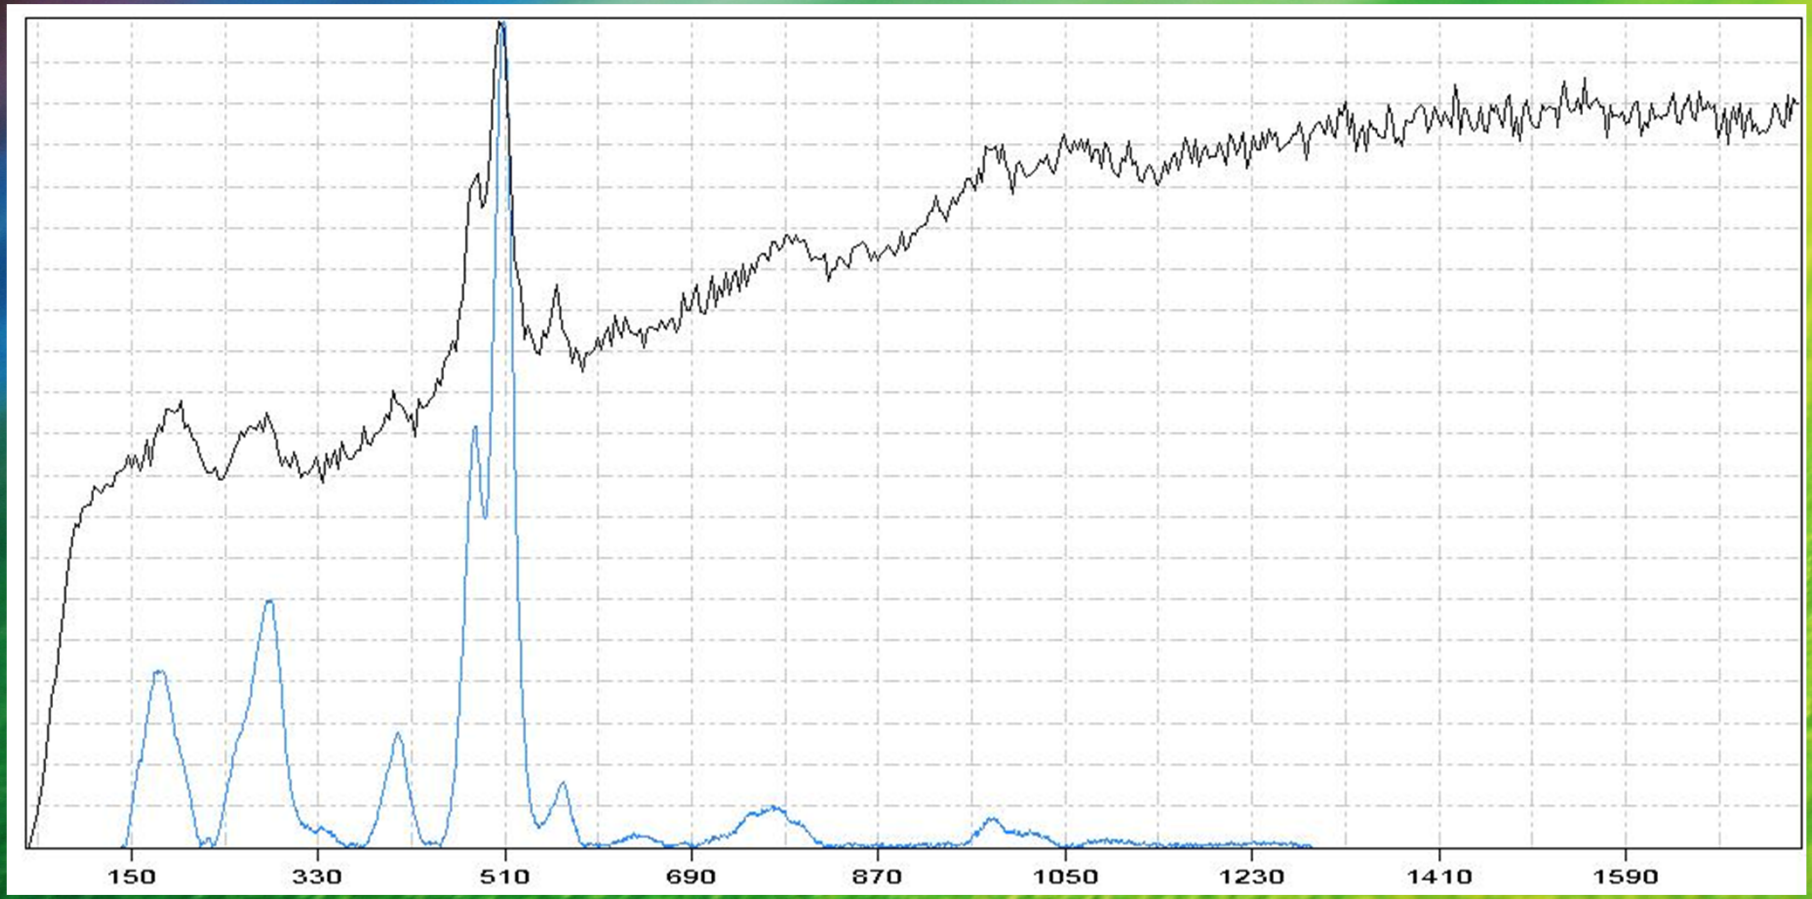

Labradorite

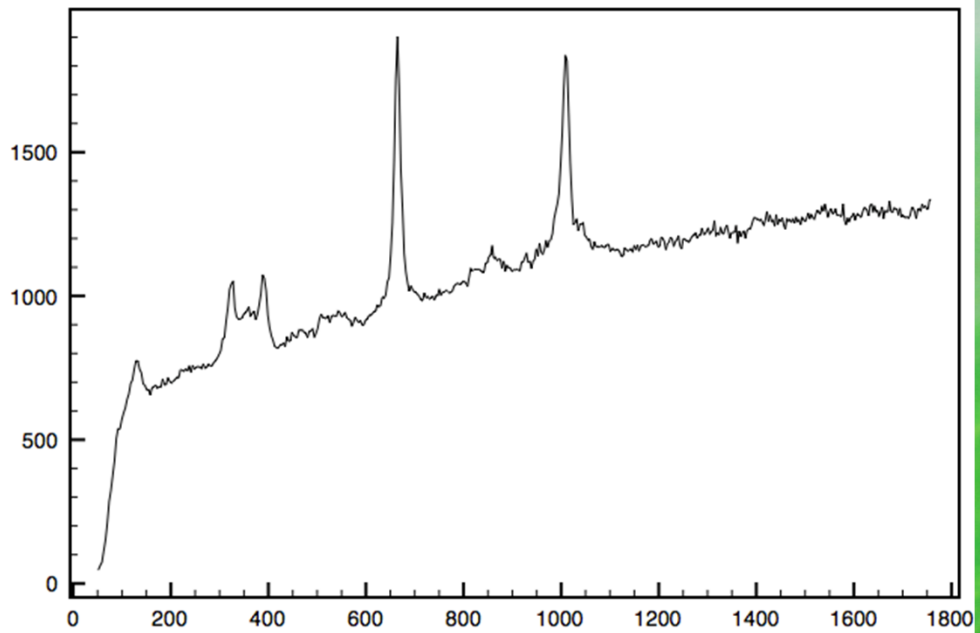

Augite (Pyroxene)

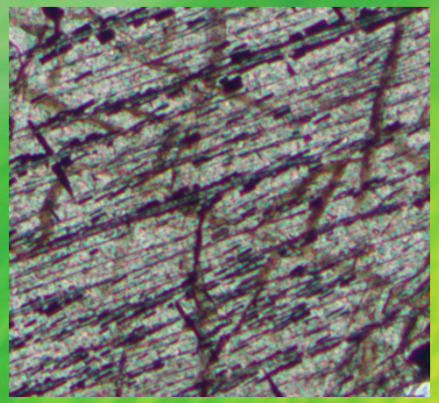

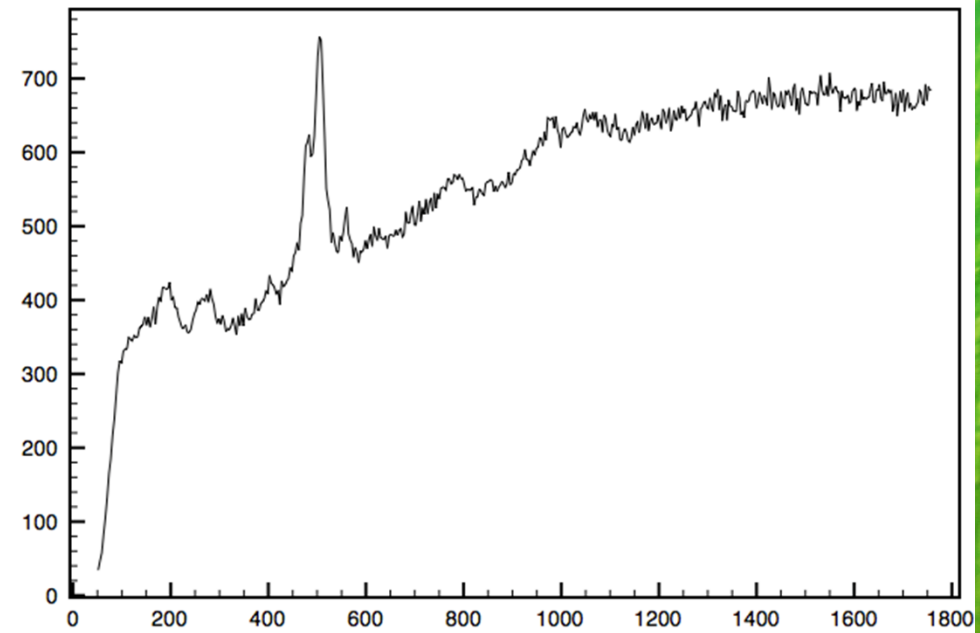

Labradorite
(Plagioclase Felspar)

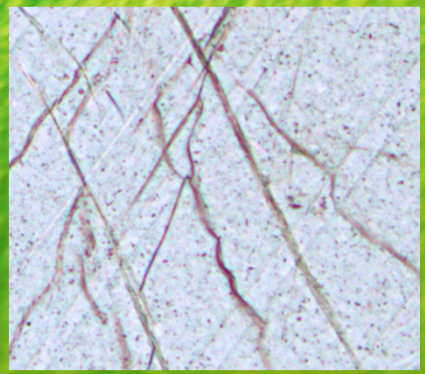

Fayalite (Olivine)

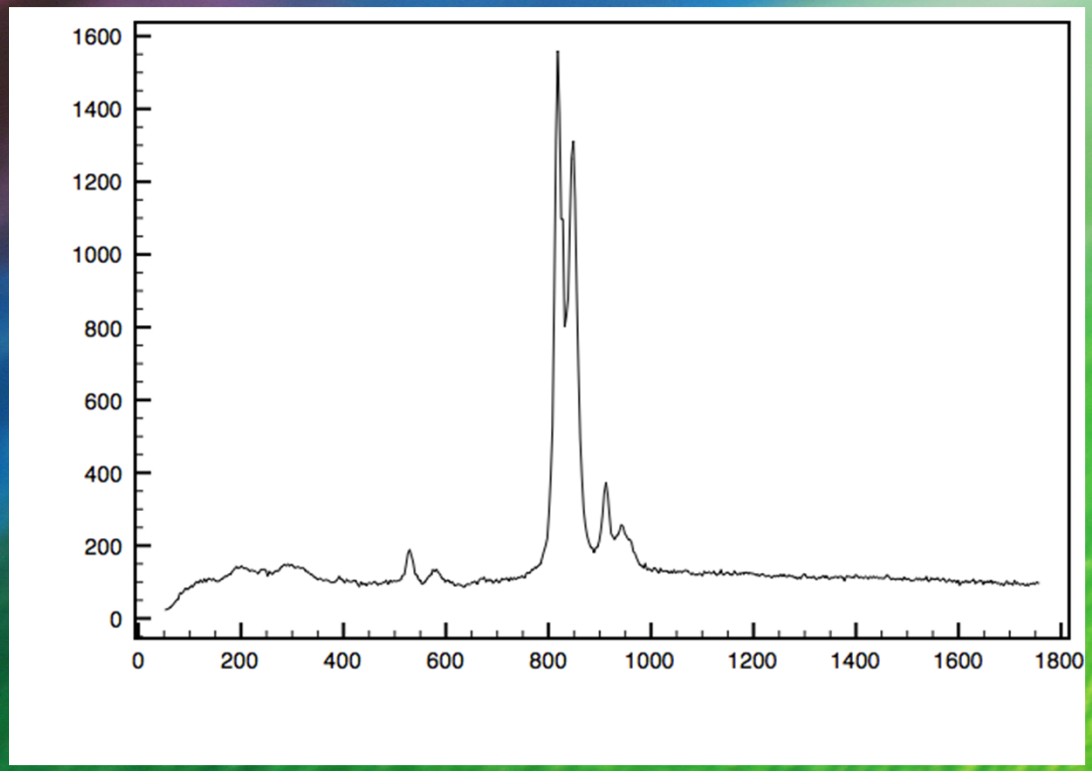

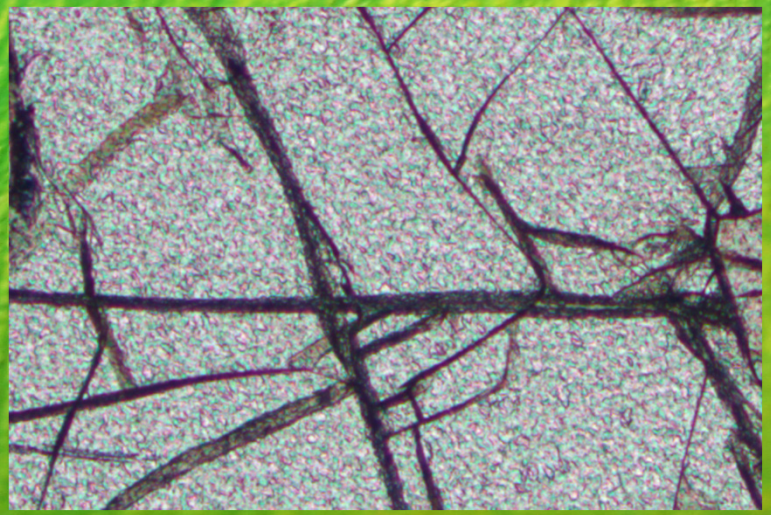

Raman Findings

Minerals found:

In Saddleback Basalt: Plagioclase Feldspars, Pyroxenes, and Olivines.

In Belleville Basalt: Plagioclase Feldspars, Pyroxenes, and Olivines.

Plagioclase Feldspars were the most common/ prevalent mineral type found in both samples.

Plagioclase Feldspar **Olivine** **Pyroxene**

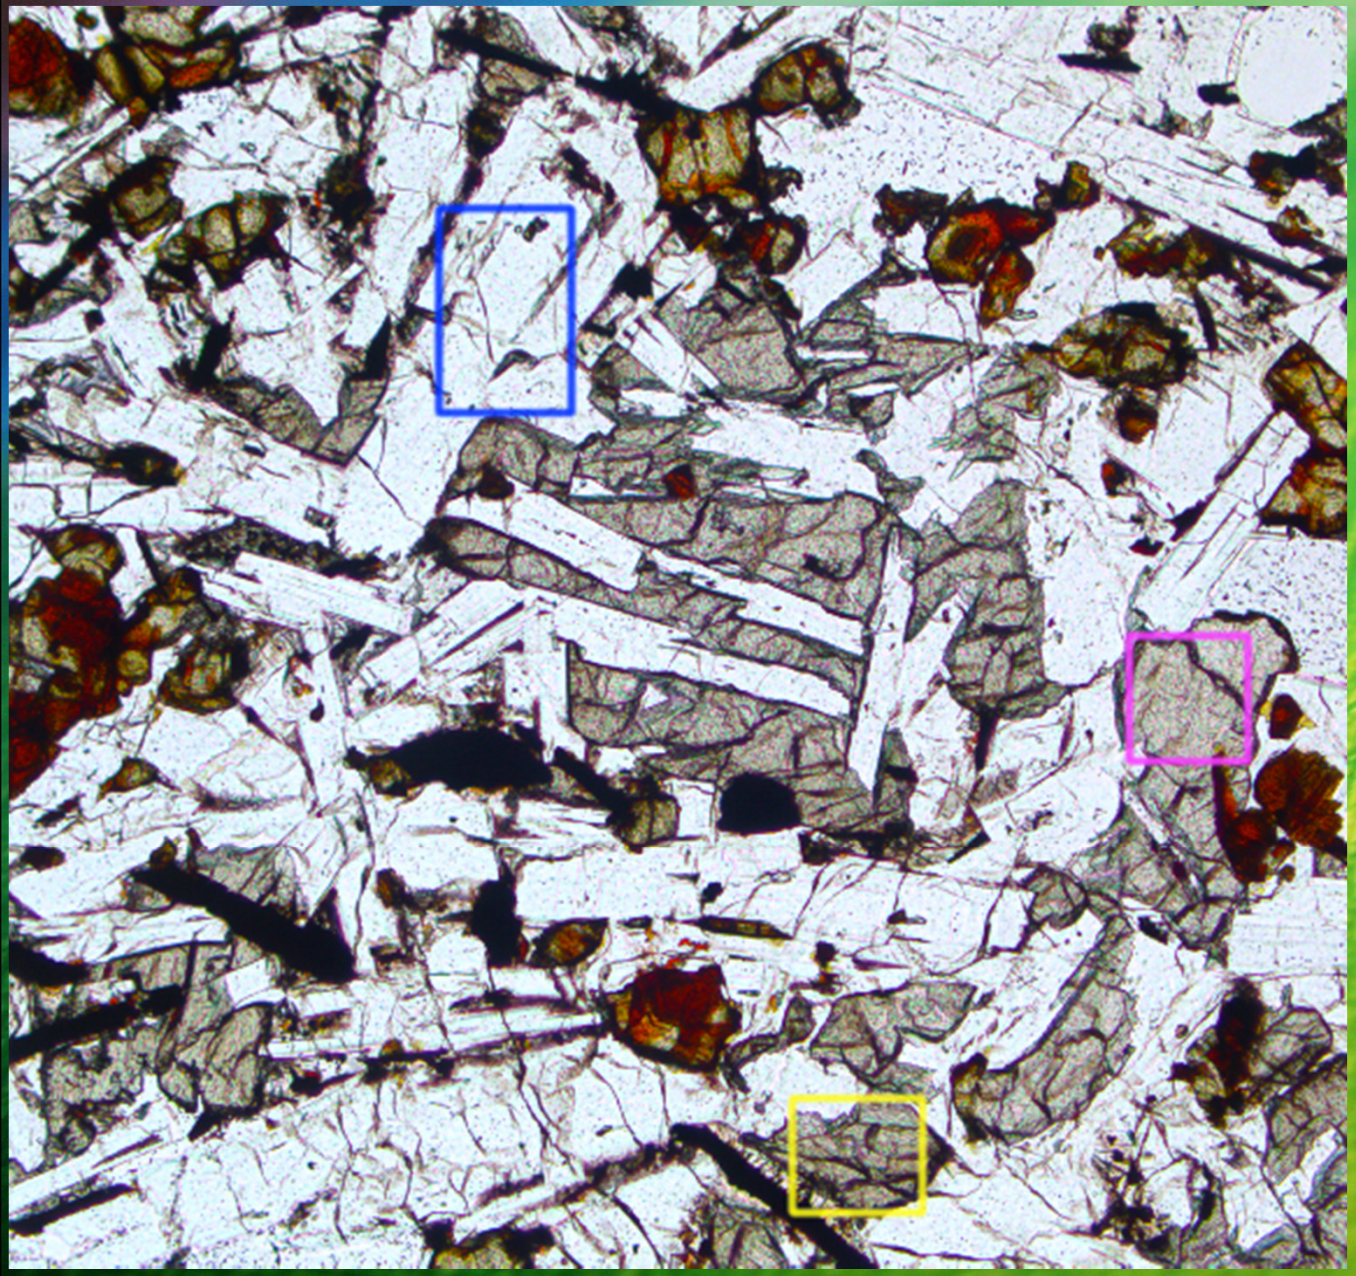

Magnification of
1,763 X 1,322 microns

Plagioclase Feldspar Olivine Pyroxene

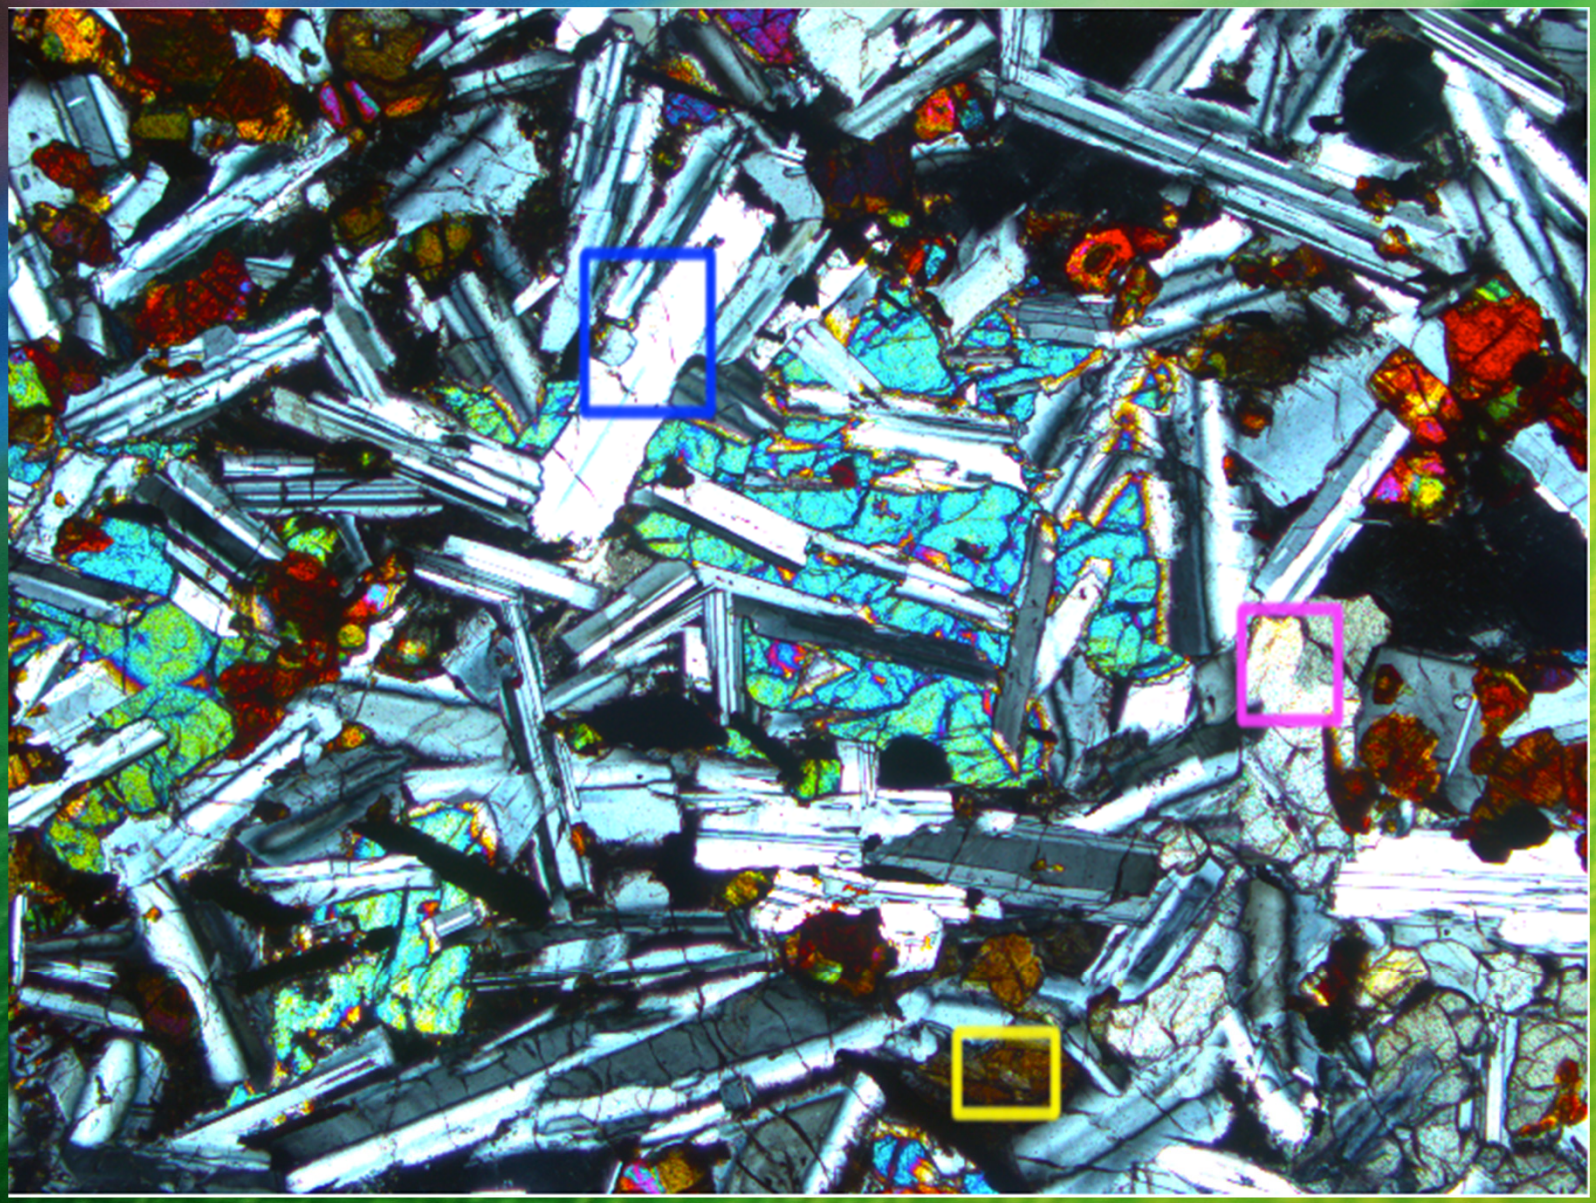

Cross-polarized Light

Magnification of 1,763 X 1,322 microns

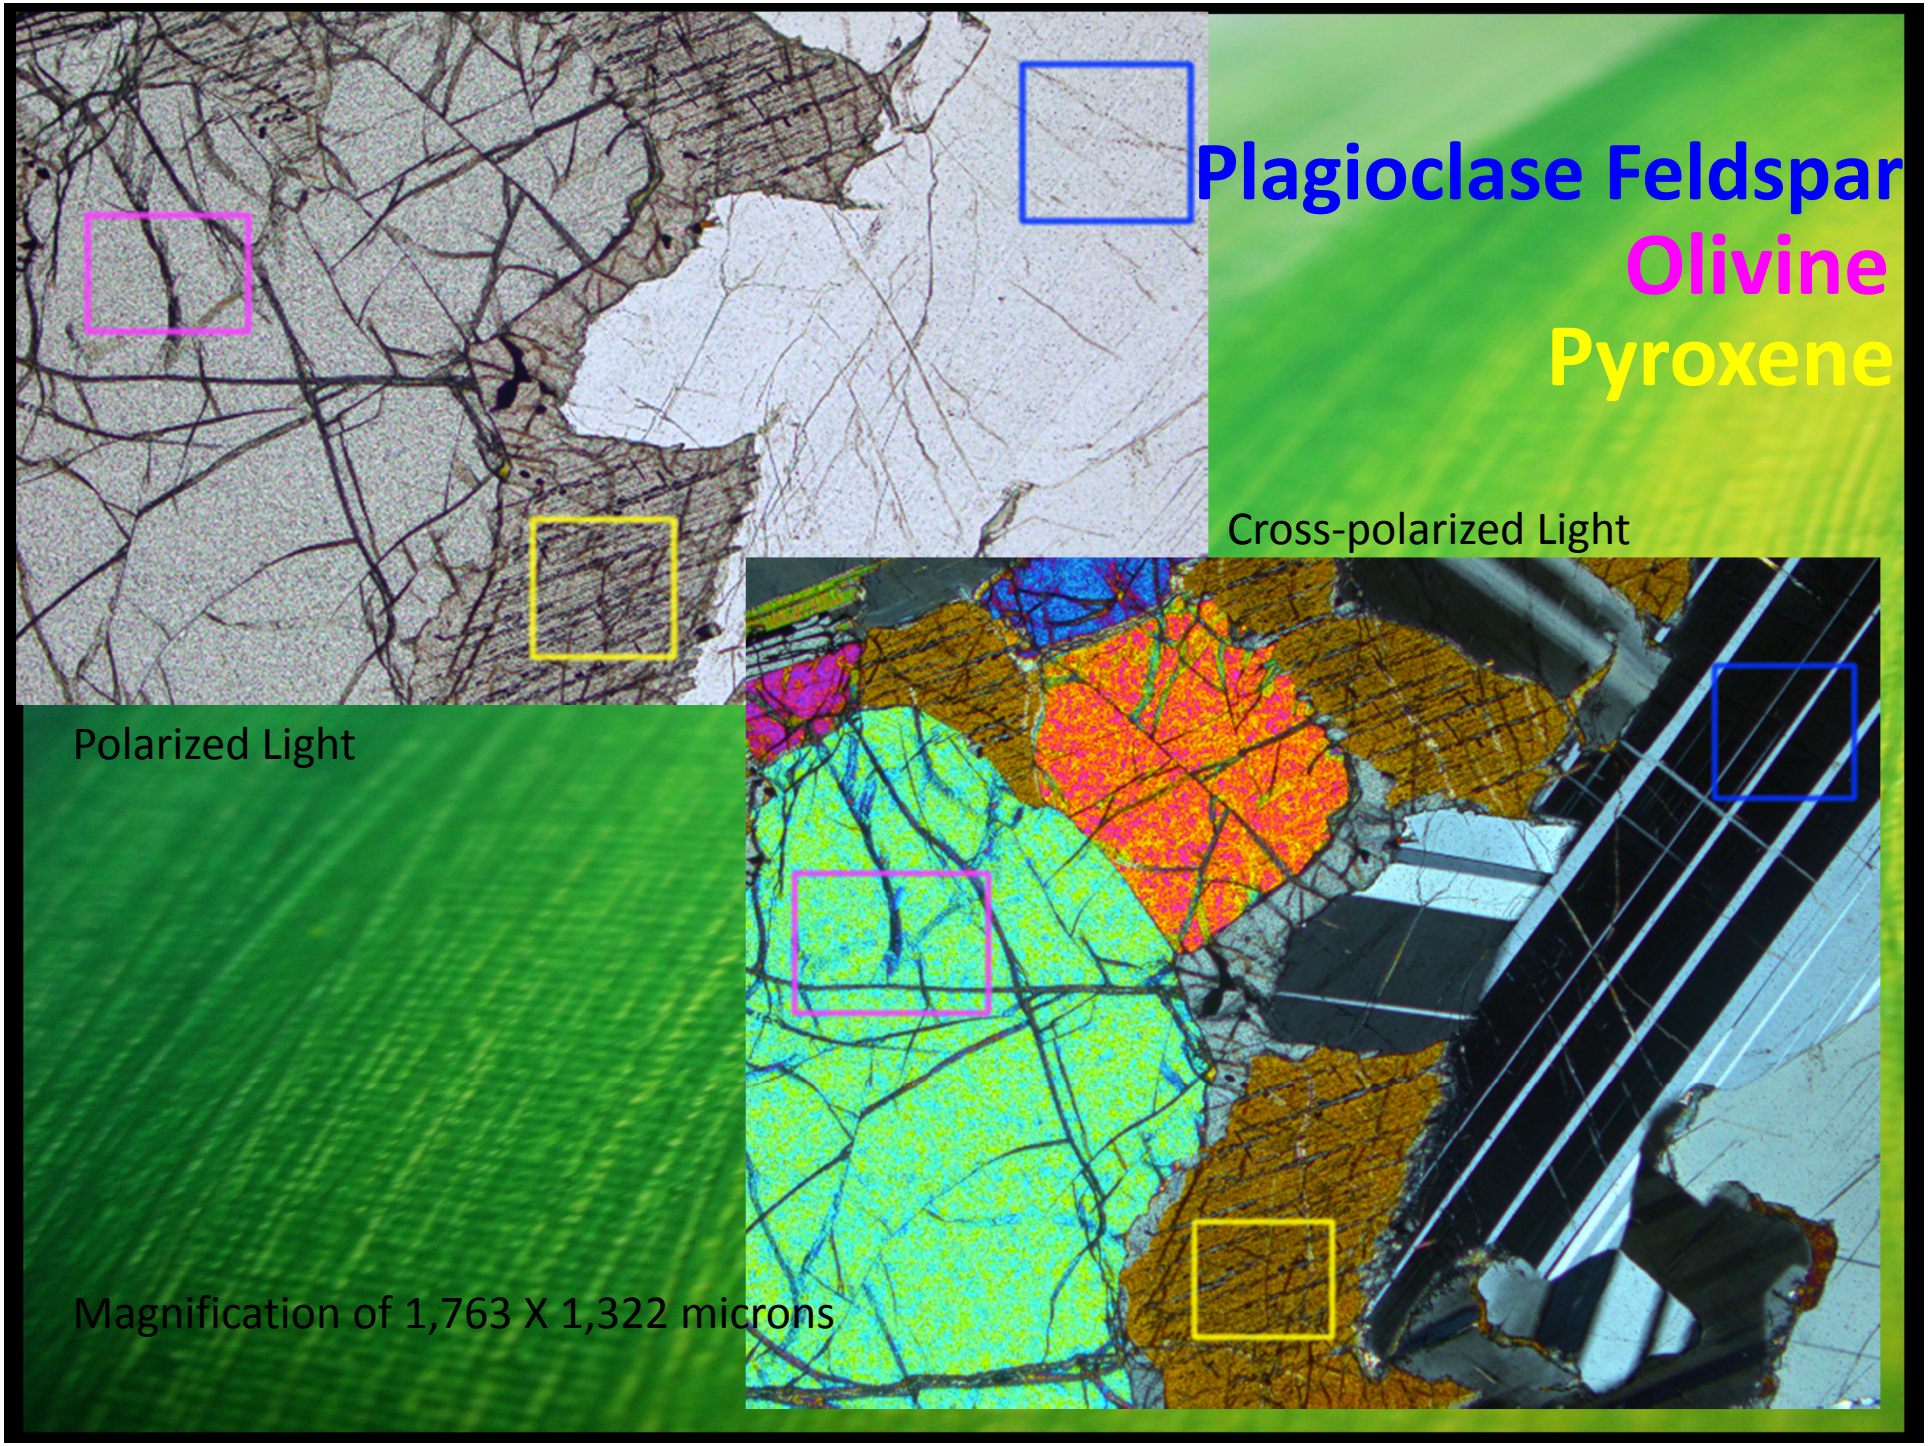
Plagioclase Feldspar
Olivine
Pyroxene
Cross-polarized Light
Polarized Light
Magnification of 1,763 X 1,322 microns

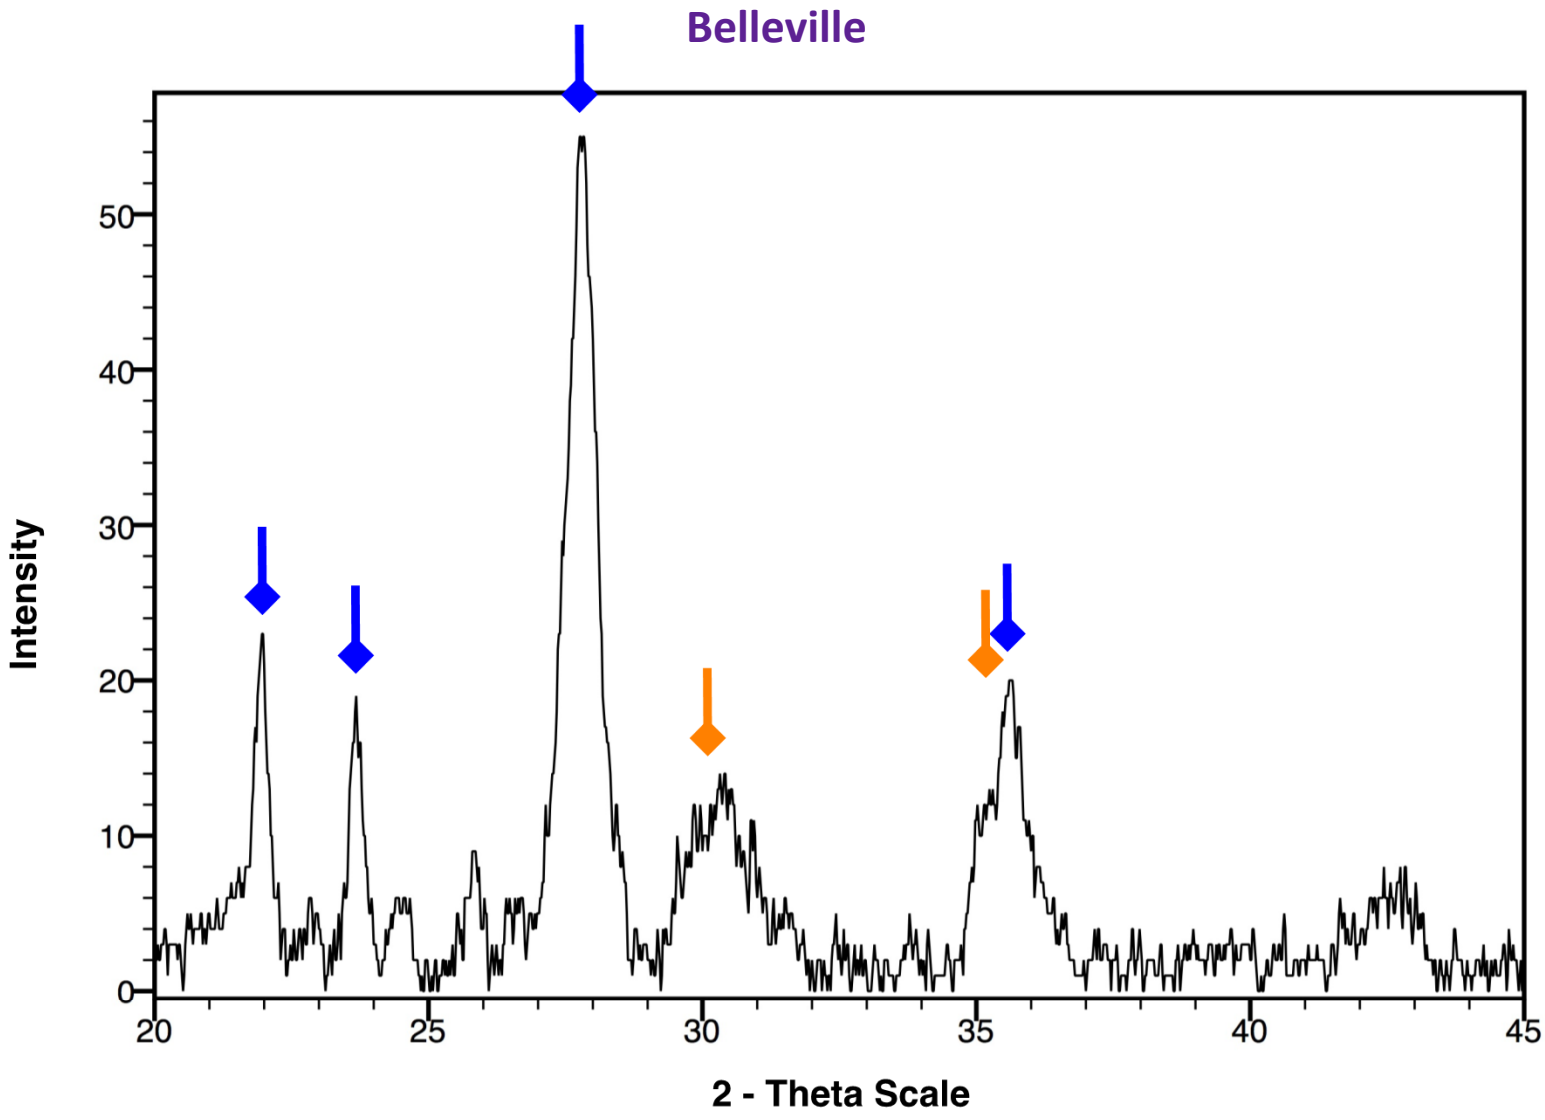

Plagioclase feldspar Pyroxene Olivine

Saddleback

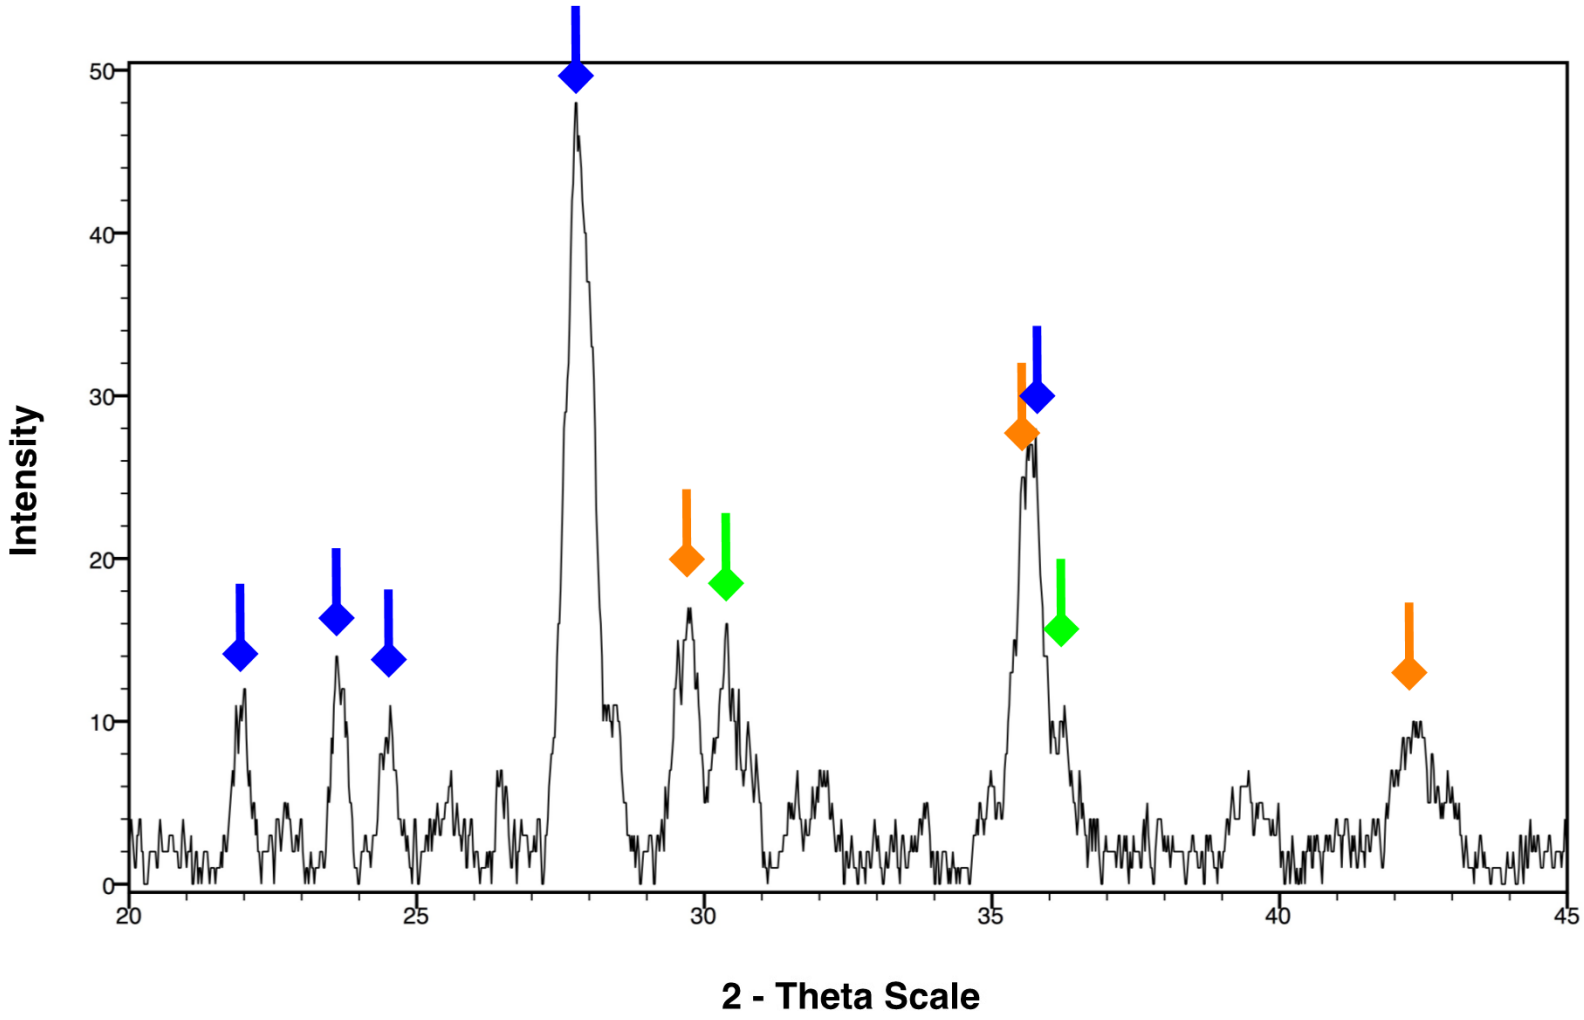

Plagioclase feldspar Pyroxene Olivine

Challenges

- Raman calibration
- Cleaning the samples properly
- Finding the right equipment for the plasma cleaner
- Making sure the DUV instrument is working
- Instrument availability
- Time it takes to run scans and to clean the samples

Belleville (Basalt)

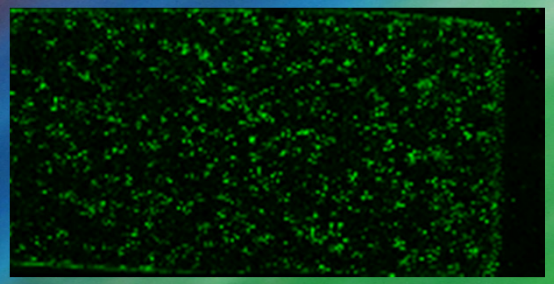

30 MICRONS

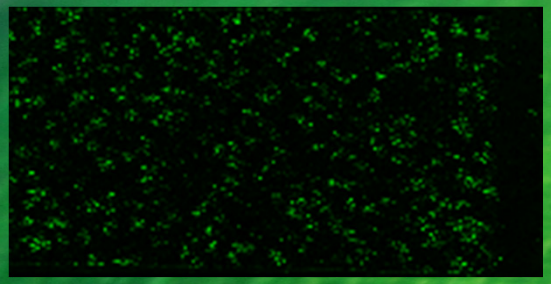

100 MICRONS

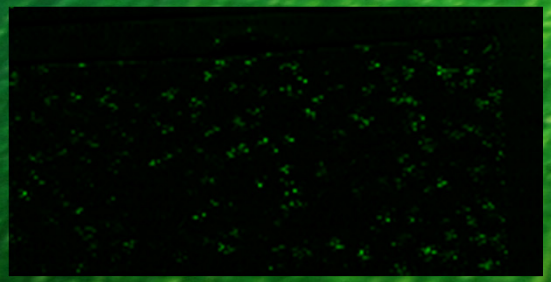

200 MICRONS

- Images show epoxy fluorescence through thinsection
- Epoxy fluorescence decreases with thickness = attenuated
- *30 microns*: fluorescence attenuated by 90%
- *100 microns*: fluorescence attenuated by 99.8%
- *200 microns*: fluorescence mostly attenuated.
- Areas of fluorescence in 100 and 200 microns thinsections are due to large crystals of feldspars (light conduits?)

Belleville vs. Saddleback (fresh vs rusty)

Belleville (30 microns)

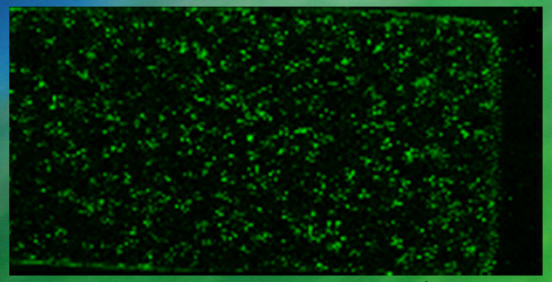

Attenuation: 90%

Saddleback (30 microns)

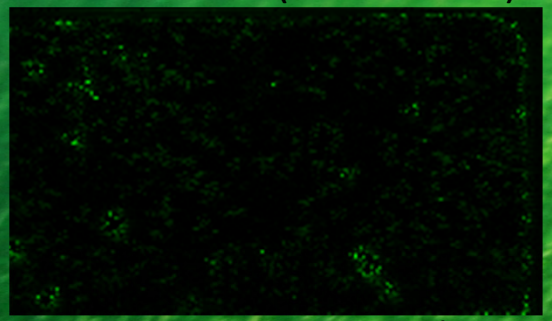

Attenuation: 99.8%

- Belleville attenuates less than Saddleback at the same thickness
- Belleville is not as "rusty" (ie oxidized) as Saddleback
- Saddleback has more iron which is an excellent UV absorber
- However, areas of fluorescence in the Saddleback are due to large crystals of feldspars (more light conduits?)

Findings

Based off of what has been observed so far from the data collected by the DUV it is evident that…

The DUV laser is able to penetrate the surfaces of the Basalt thin sections at 30 and 100 microns thick.

We know this is true because the epoxy that holds the rock thin section to the slide fluoresces and the laser attenuates and the minerals in the rock thin sections fluoresces.

Maximum attenuation value 1-3%/micron (for Belleville)

Field Deployment!

References

Bhartia et al (2008) Appl Spec 62(10), 1070-1077
Frosch et al (2007) Analy Chem 79)3), 1101-1108
Cloutis et al (2008) Icarus 197, 321-347
Peters et al (2008) Icarus 10.1016

Pictures:

http://www.jpl.nasa.gov/spaceimages/details.php?id=PIA14156

http://www.gocomics.com/fminus/2011/08/01

http://www.gocomics.com/fminus/2011/07/27

Disclaimer

"This material is based upon work supported by the S.D. Bechtel, Jr. Foundation and by the National Science Foundation under Grant No. 0952013. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the S.D. Bechtel, Jr. Foundation or the National Science Foundation."

Acknowledgements

- Mentor William Abbey
- Co-mentor Rohit Bhartia
- Luther Beegle
- Alexa Bilek (fellow rock star)
- Martin Mathews
- Dr. Gerry Simila
- Petra Kneissl-Milanian
- JPL Education Office
- Dr. Bryan Rebar
- STAR Program & Staff
- NASA
- National Science Foundation
- Bechtel Foundation
- California State University