

# **The Mars Science Laboratory EDL Mode Commander**


Paul Brugarolas, Kim Gostelow, Miguel San Martin,  
Fred Serricchio and Gurkupal Singh

Jet Propulsion Laboratory, California Institute of Technology






# MSL Mission Overview

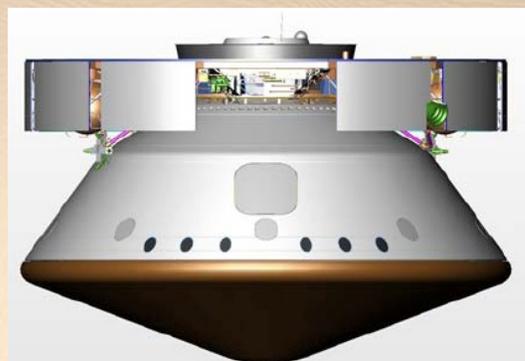

## CRUISE/APPROACH

- 8 to 9-month cruise
- Arrive August 6-20, 2012




## ENTRY, DESCENT, LANDING

- Guided entry and powered “sky crane” descent
- 20 × 25-km landing ellipse
- Access to landing sites  $\pm 30^\circ$  latitude,  $< 0$  km elevation
- 900-kg rover



## SURFACE MISSION

- Prime mission is one Mars year (687 days)
- Latitude-independent and long-lived power source
- Ability to drive out of landing ellipse
- 72 kg of science payload
- Direct (uplink) and relayed (downlink) communication
- Fast CPU and large data storage

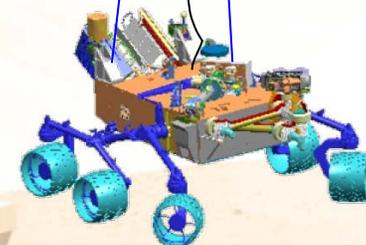


## LAUNCH

- Window is Nov. 25 to Dec. 18, 2011
- Atlas V (541)





# MSL Entry, Descent, and Landing

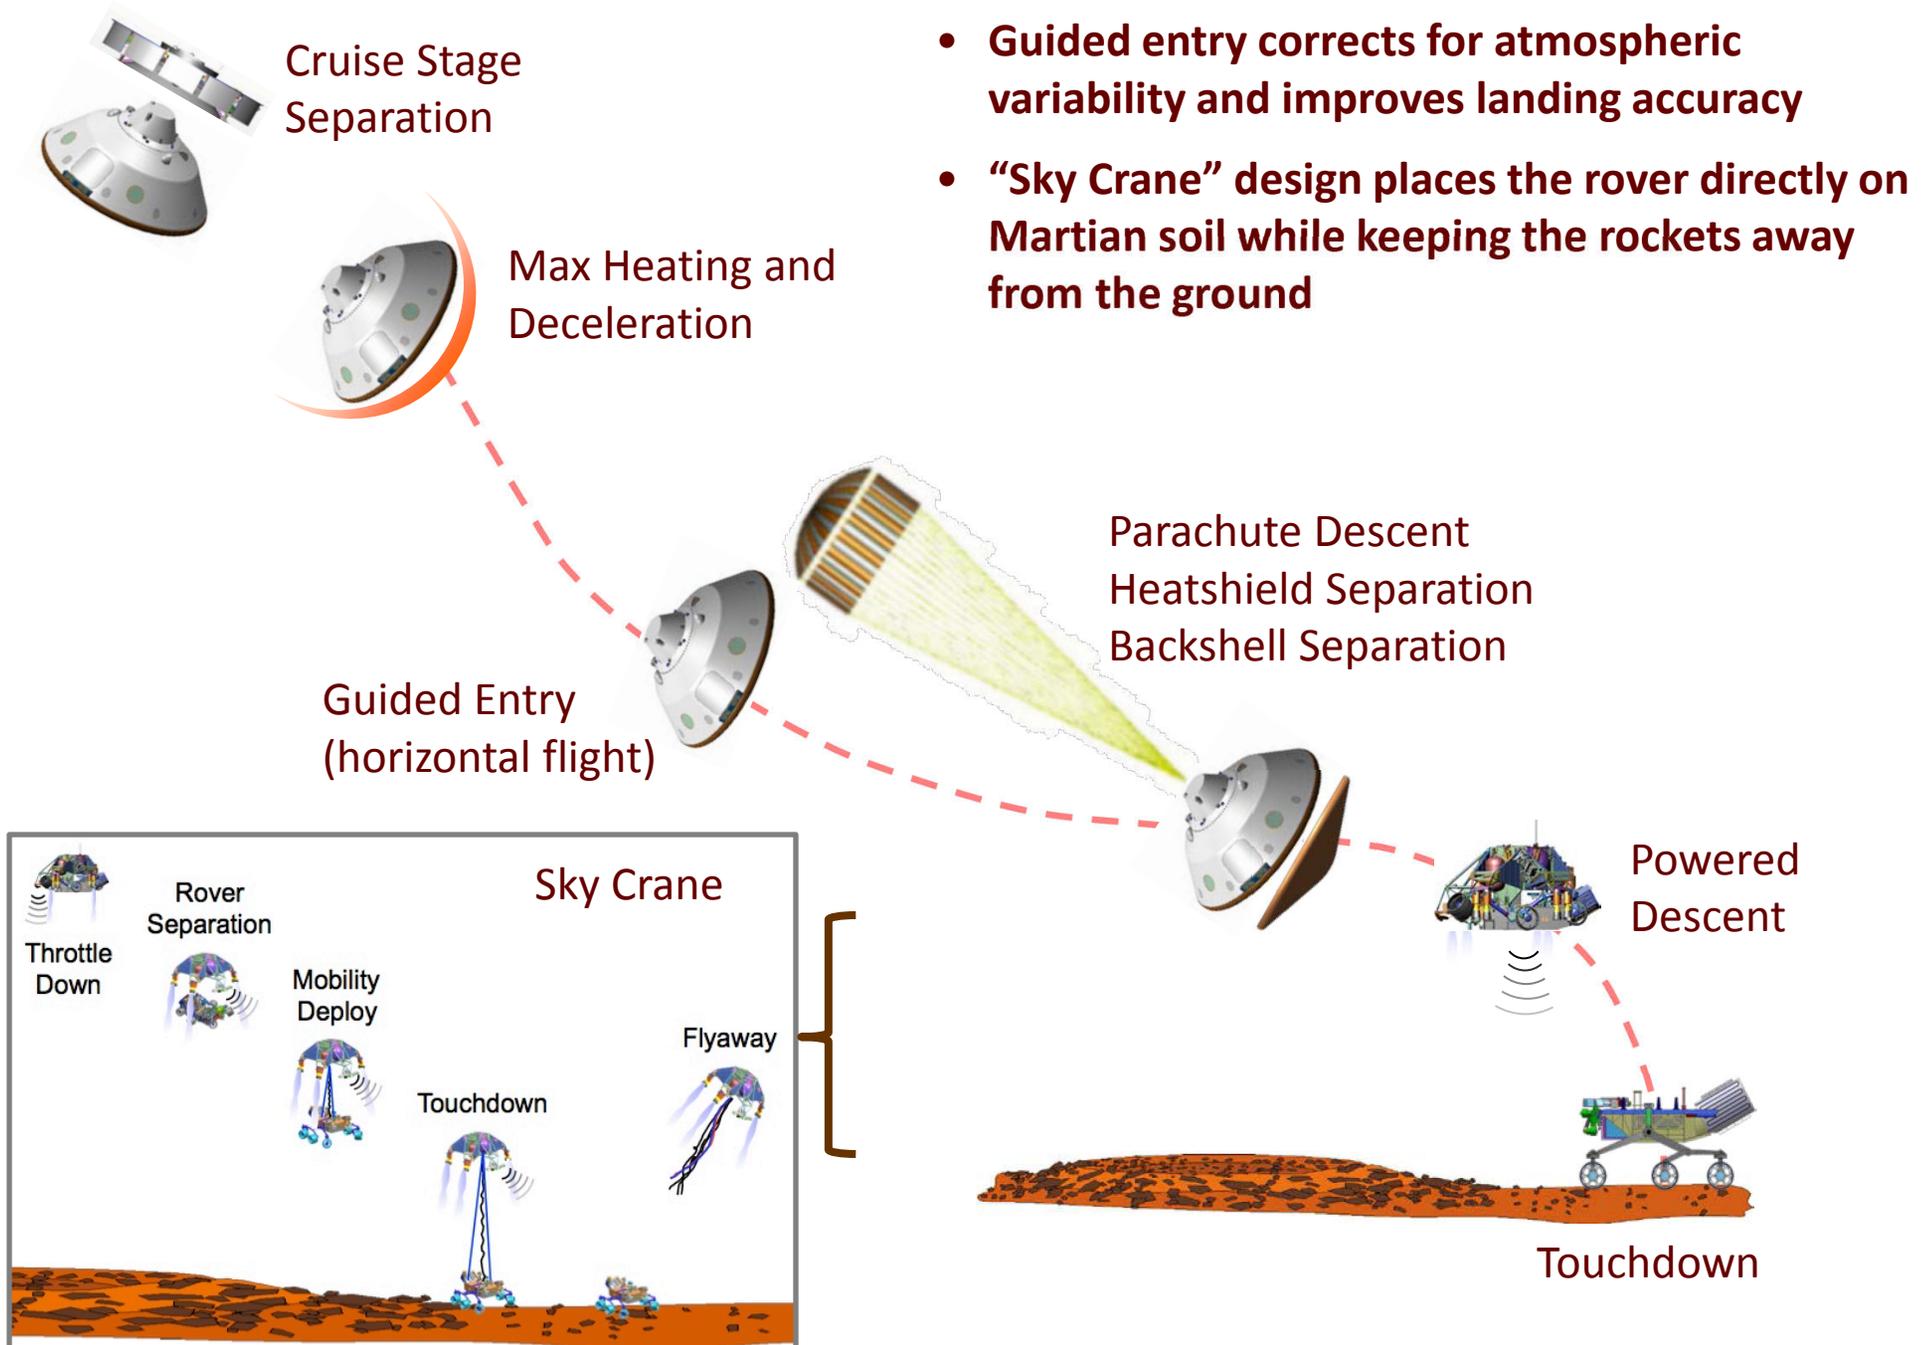




# How does the EDL system actually do it?

- The EDL system has three main components:
  1. A timeline engine to prepare and coordinate all the events
  2. A Navigation Mode Commander to manage the estimation of the vehicle position and orientation from the Descent Inertial Measurements Units and the Terrain Descent Sensor (radar)
  3. An EDL Mode Commander to reconfigure the vehicle and guide-and-control the vehicle to a safe landing.
- This talk will describe this last component, the EDL Mode Commander, which is the executive that orchestrates:
  - Hardware reconfigurations (balance mass ejections, heatshield and backshell jettisons, parachute opening, rover separation, etc.)
  - Guidance Navigation & Control functions (position and attitude estimation, entry guidance, RCS attitude control until powered descent starts, powered descent guidance, powered descent position and attitude control).
- We will describe the EDL modes of operation, the vehicle reconfigurations, the GN&C functions performed at each mode, and the navigational and temporal triggers used to transition between modes.





# EDL GN&C Block Diagram

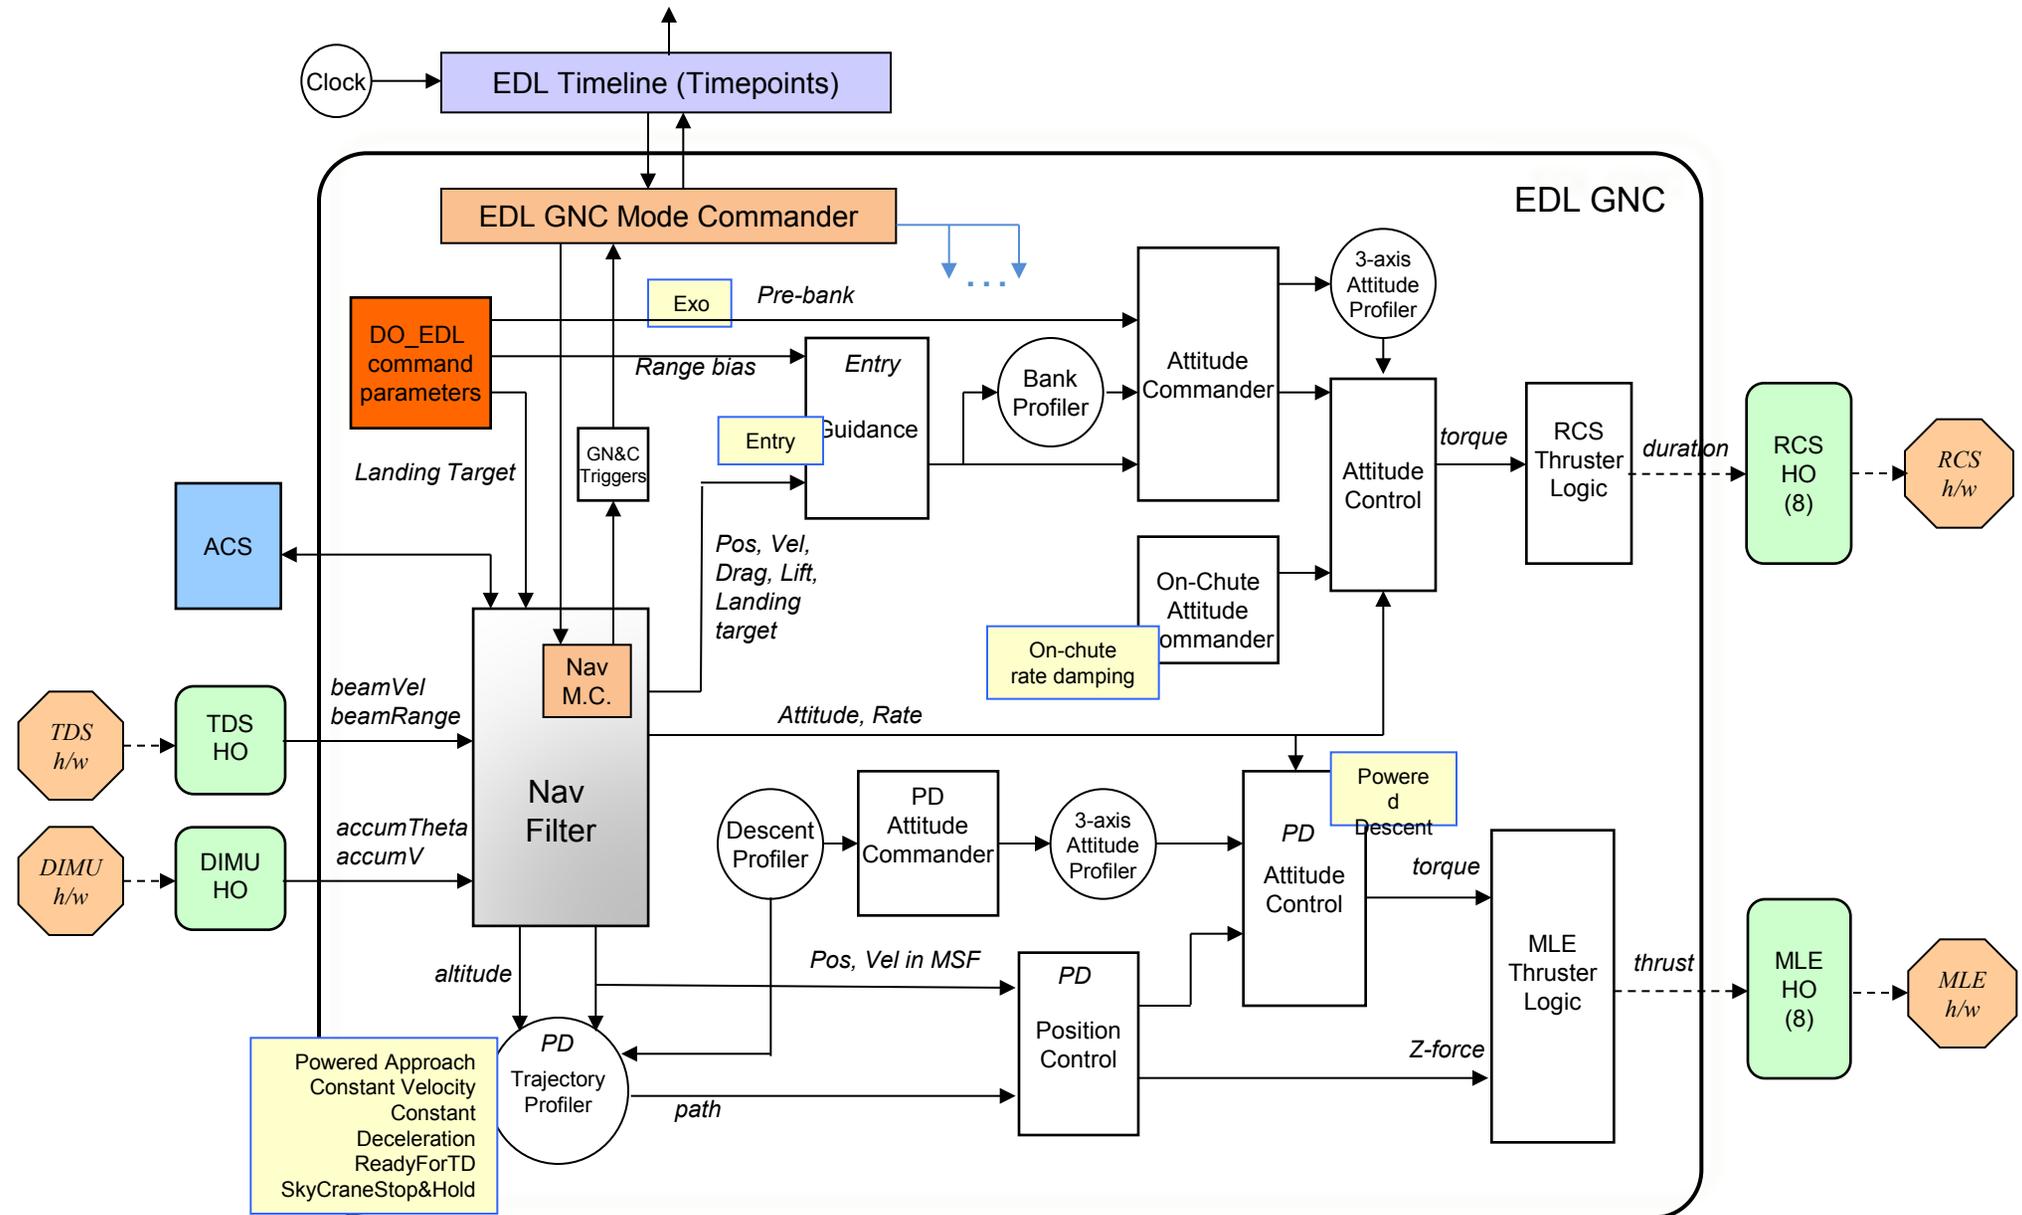





# How does the Mode Commander works?

- The EDL GN&C mode commander is a state machine that precisely defines the behavior of the EDL GN&C system. It specifies which GN&C functions are performed at each mode and the conditions to transition between modes.
- Mode Triggers:
  - Timepoint triggers: to, CBM ejection, Entry interface (pressurize RCS), EBM ejections, uninhibit RCS, start TDS nav. Init, warm MLE, PD detumble, rover separation, done.
  - GNC profiled triggers: De-spin, Turn to entry, Bank reversals, Heading alignment slew, Radar attitude slew, PD powered approach, PD constant velocity, PD constant deceleration, PD throttle down, PD SkyCrane constant velocity,
  - Navigated state triggers: Guidance start trigger, Heading alignment start trigger, SUFR trigger, Chute deploy trigger, Heatshield ejection, prime MLE, Backshell Separation, and Touchdown trigger.
- The EDL GN&C mode commander has 38 modes that describe the main functions of the EDL-GN&C system
- It interfaces with the Timeline Engine and the Navigation Mode Commander
- It manages parameters, dynamic states, RCS and MLE command requests, telemetry and real time communication data products






# EDL GN&C Main Mode Commander: - Open Loop Test Modes

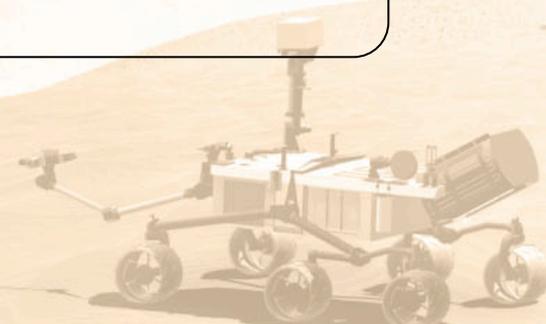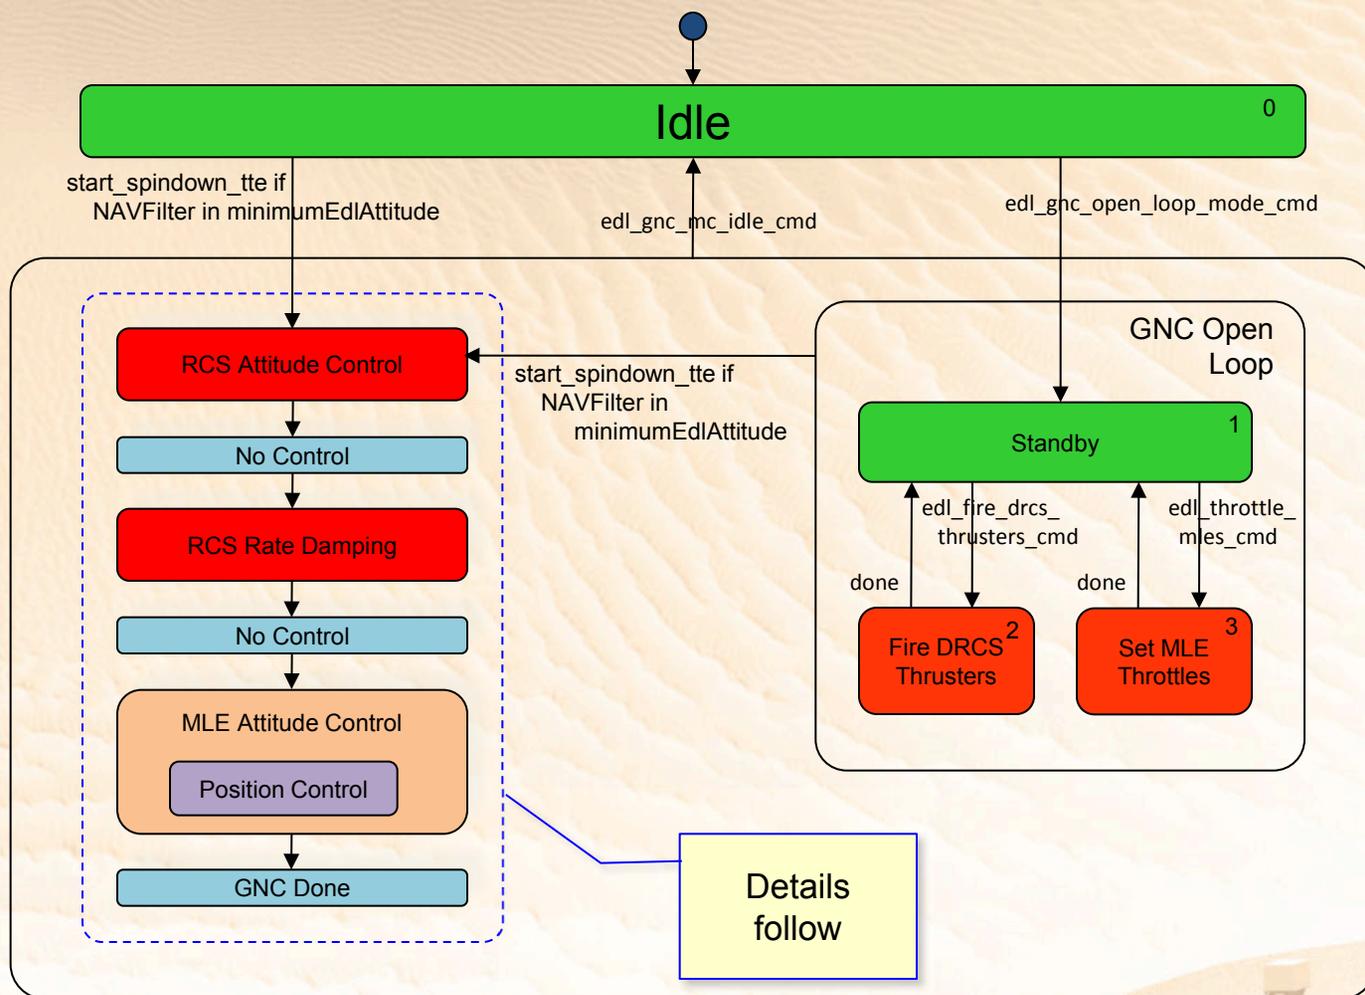



# EDL GNC Main Mode Commander: Exo-atmospheric phase

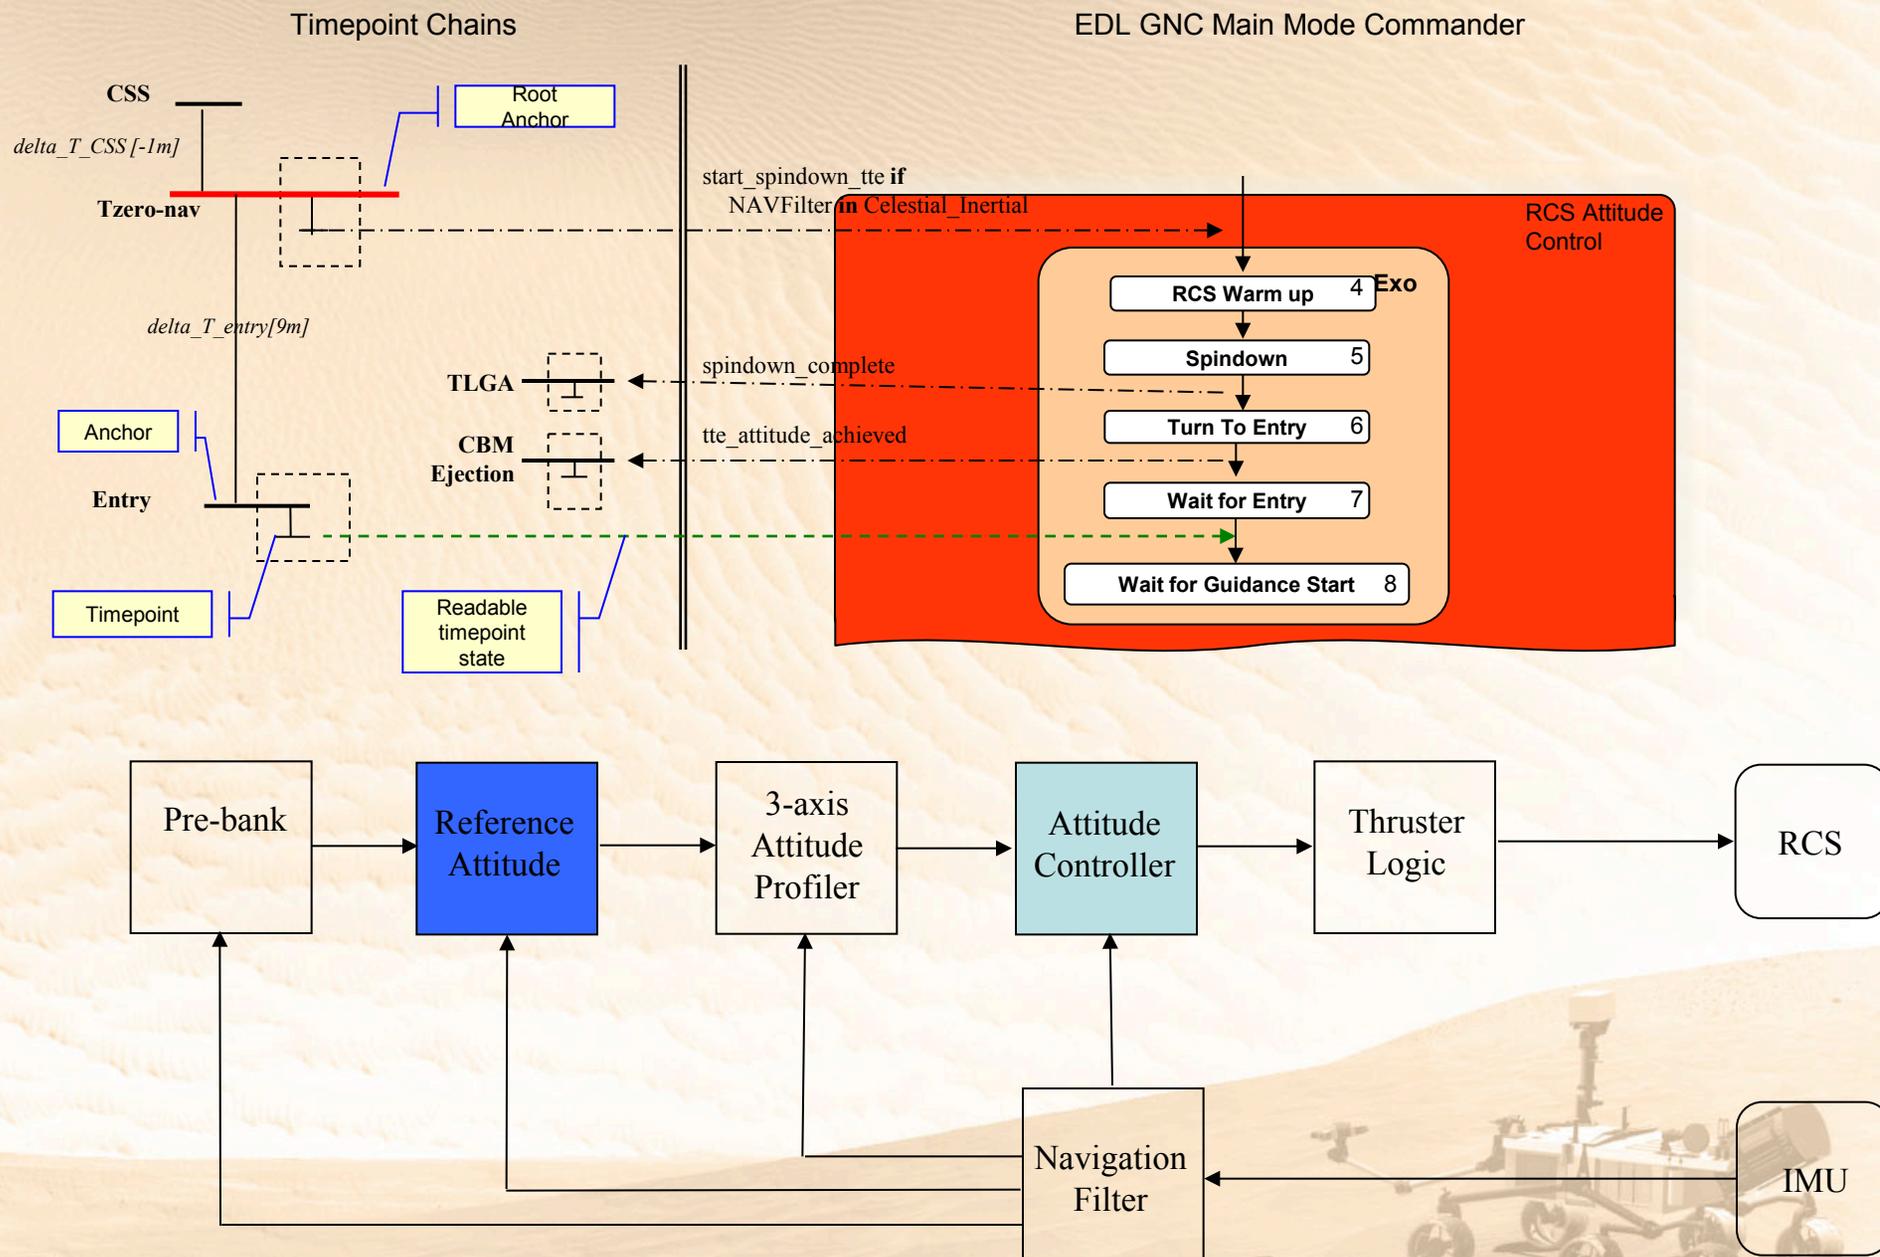






# Navigated State Triggers

- Guidance start trigger:
  - Drag acceleration trigger
  - Fired if
    - GNC Mode = `WAIT_FOR_GUIDANCE_START`;
    - estimated drag acceleration > 0.2 Earth-g.
- Heading Alignment start trigger
  - Velocity trigger
  - Fired if
    - GNC Modes = Anytime during Range Control phase
    - Estimated atmospheric relative speed < 1100 m/s
- SUFR/Slew to RADAR Attitude start trigger
  - Velocity/Acceleration trigger
  - Fired if
    - GNC Modes = Anytime Heading Alignments phase
    - Estimated atmospheric relative speed < 545 m/s
- Parachute deploy trigger
  - Velocity/Acceleration trigger
  - Fired if
    - GNC Modes = Anytime during Slew to Radar Attitude/SUFR modes
    - Estimated atmospheric relative speed < 485 m/s








# Velocity/Acceleration Trigger

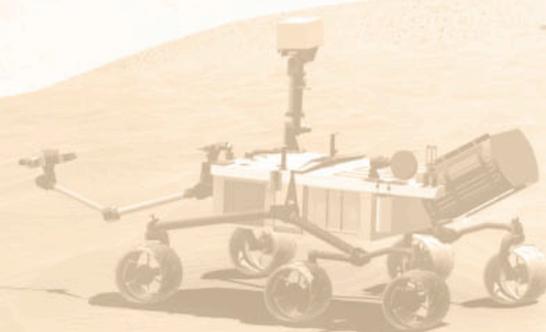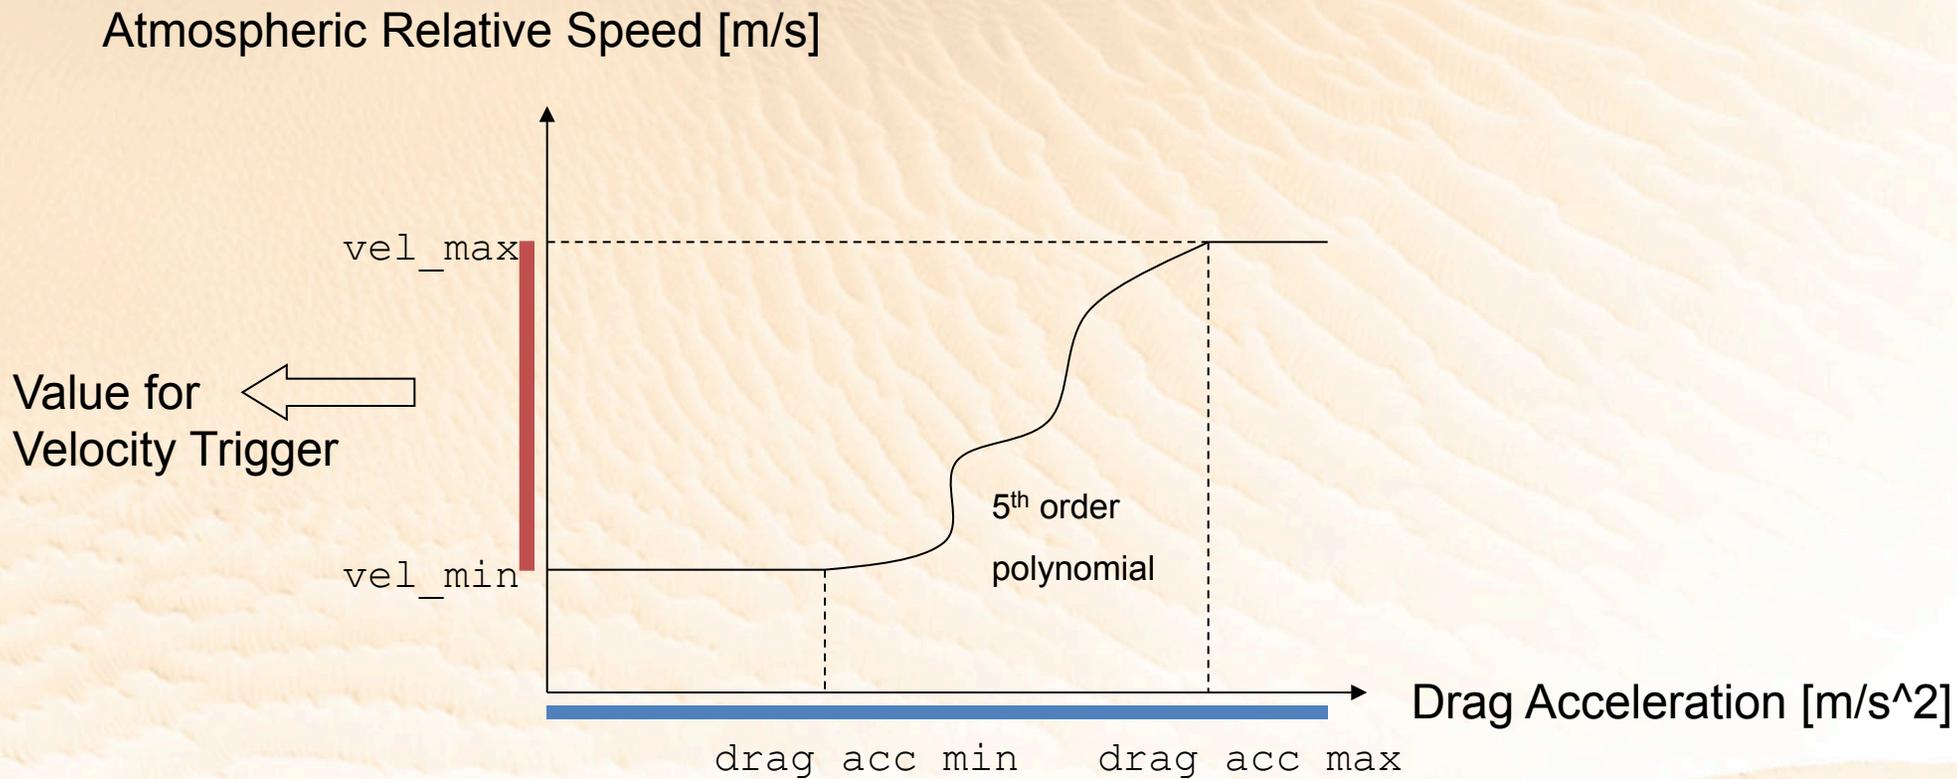




# EDL GNC Main Mode Commander: Entry phase

Timepoint Chains

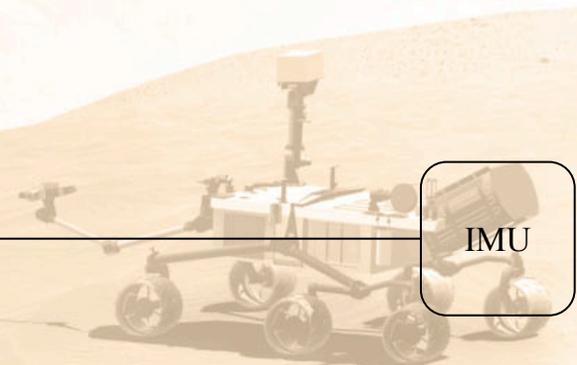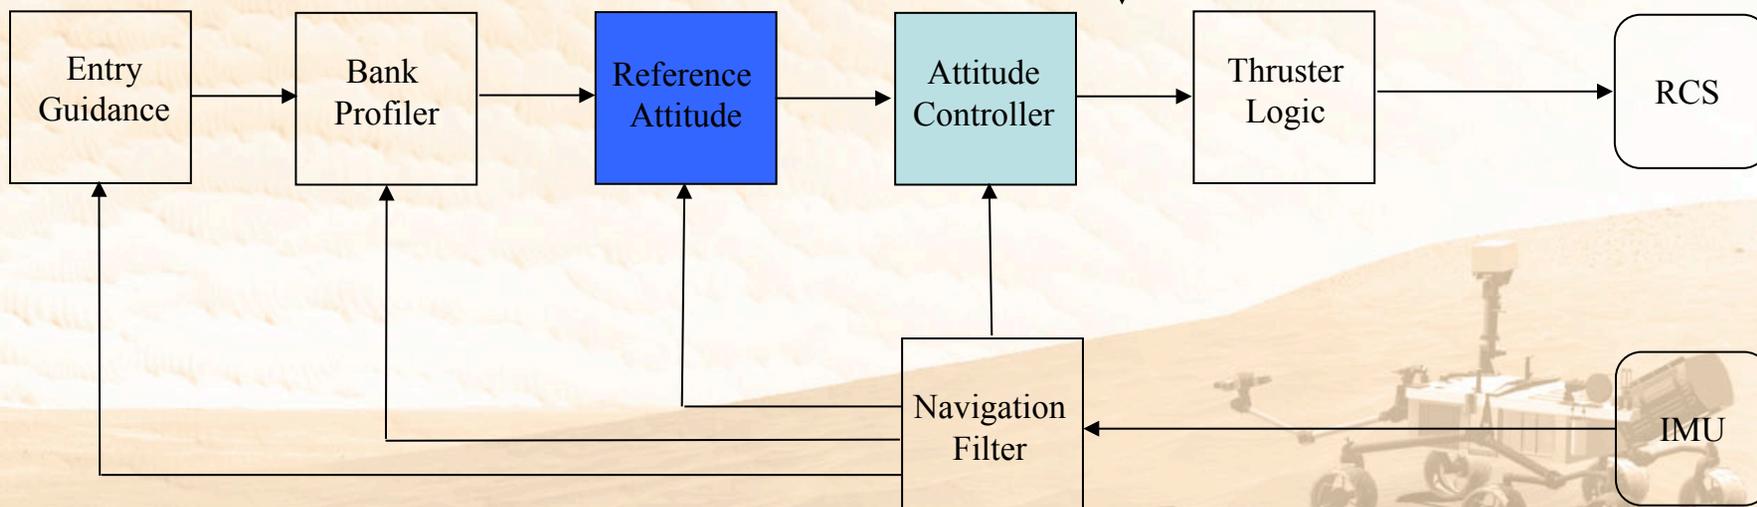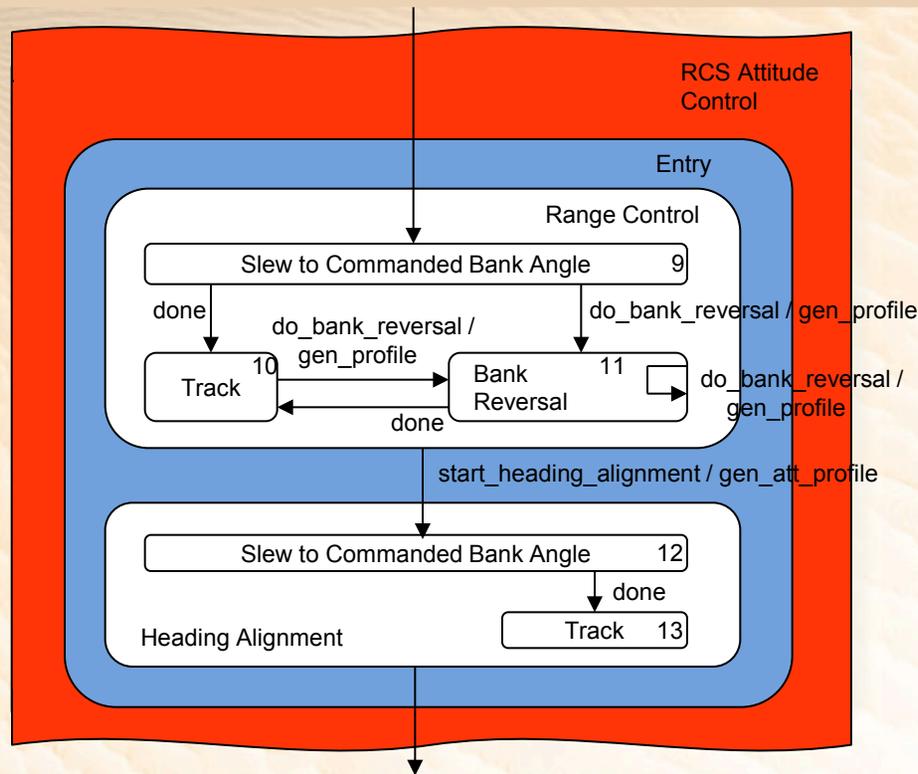





# EDL GNC Main Mode Commander: Straighten Up and Flight Right and Roll Slew

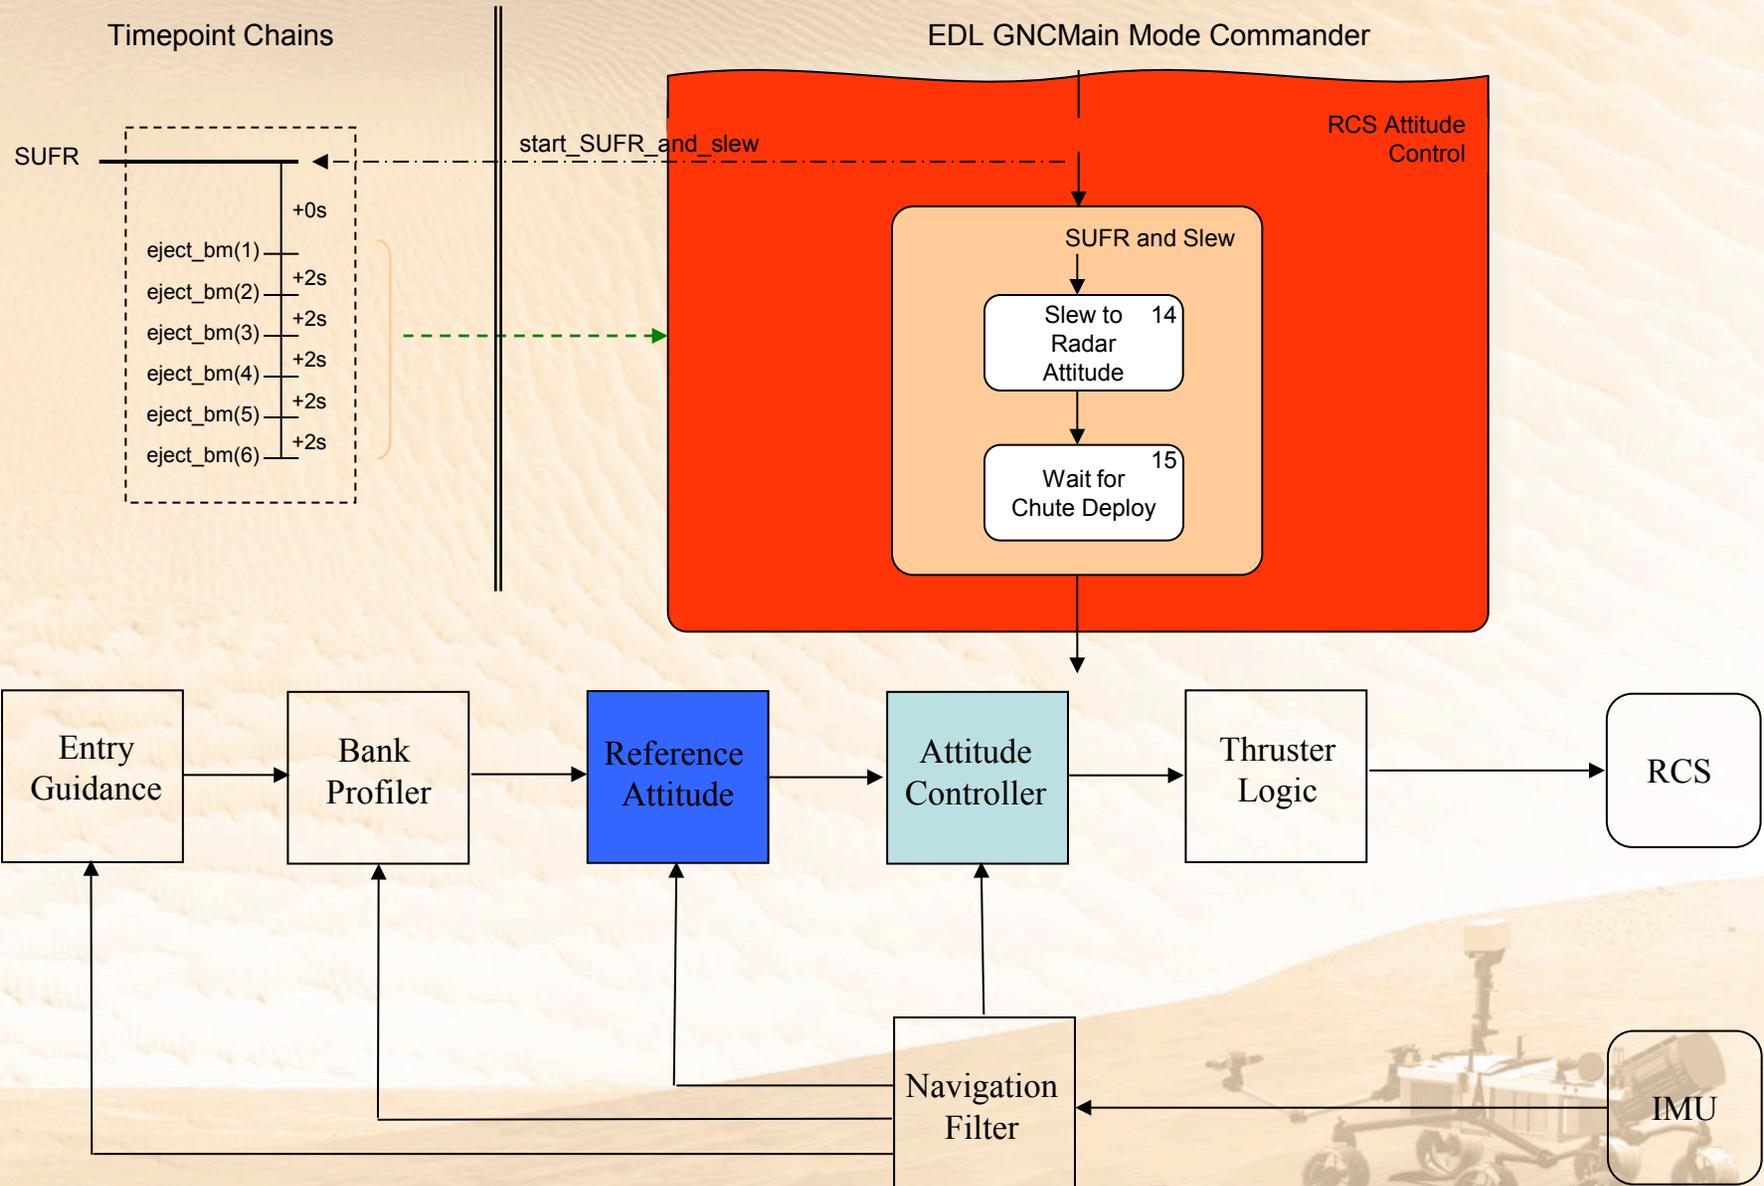




# EDL GNC Main Mode Commander: Chute Deploy Trigger

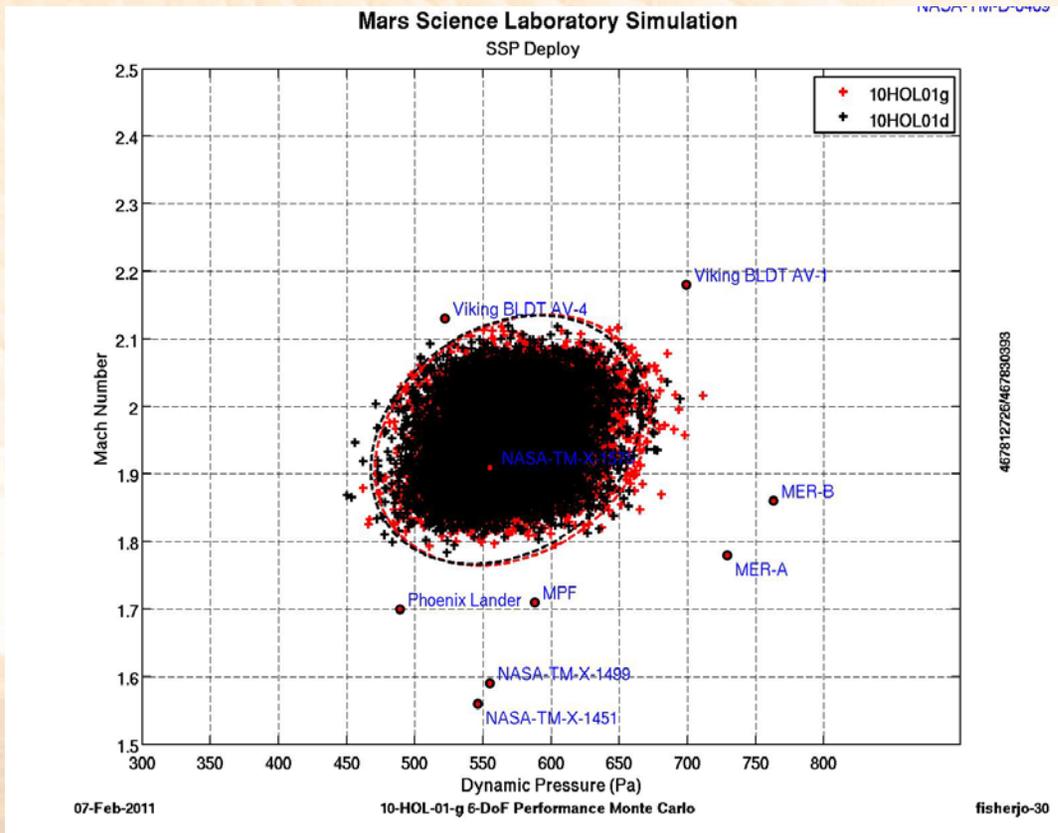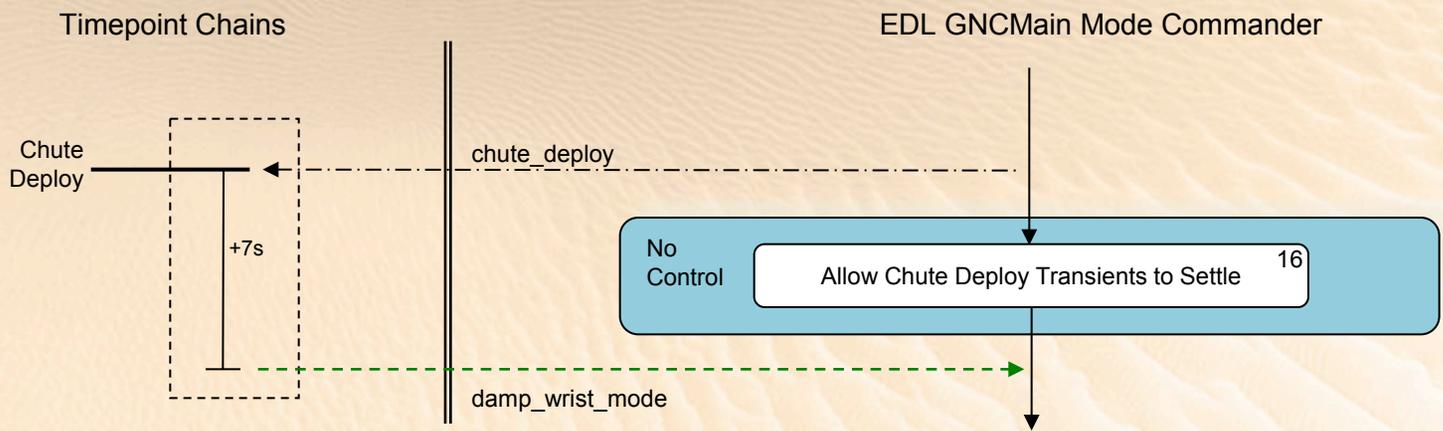





# EDL GNC Main Mode Commander: Parachute phase

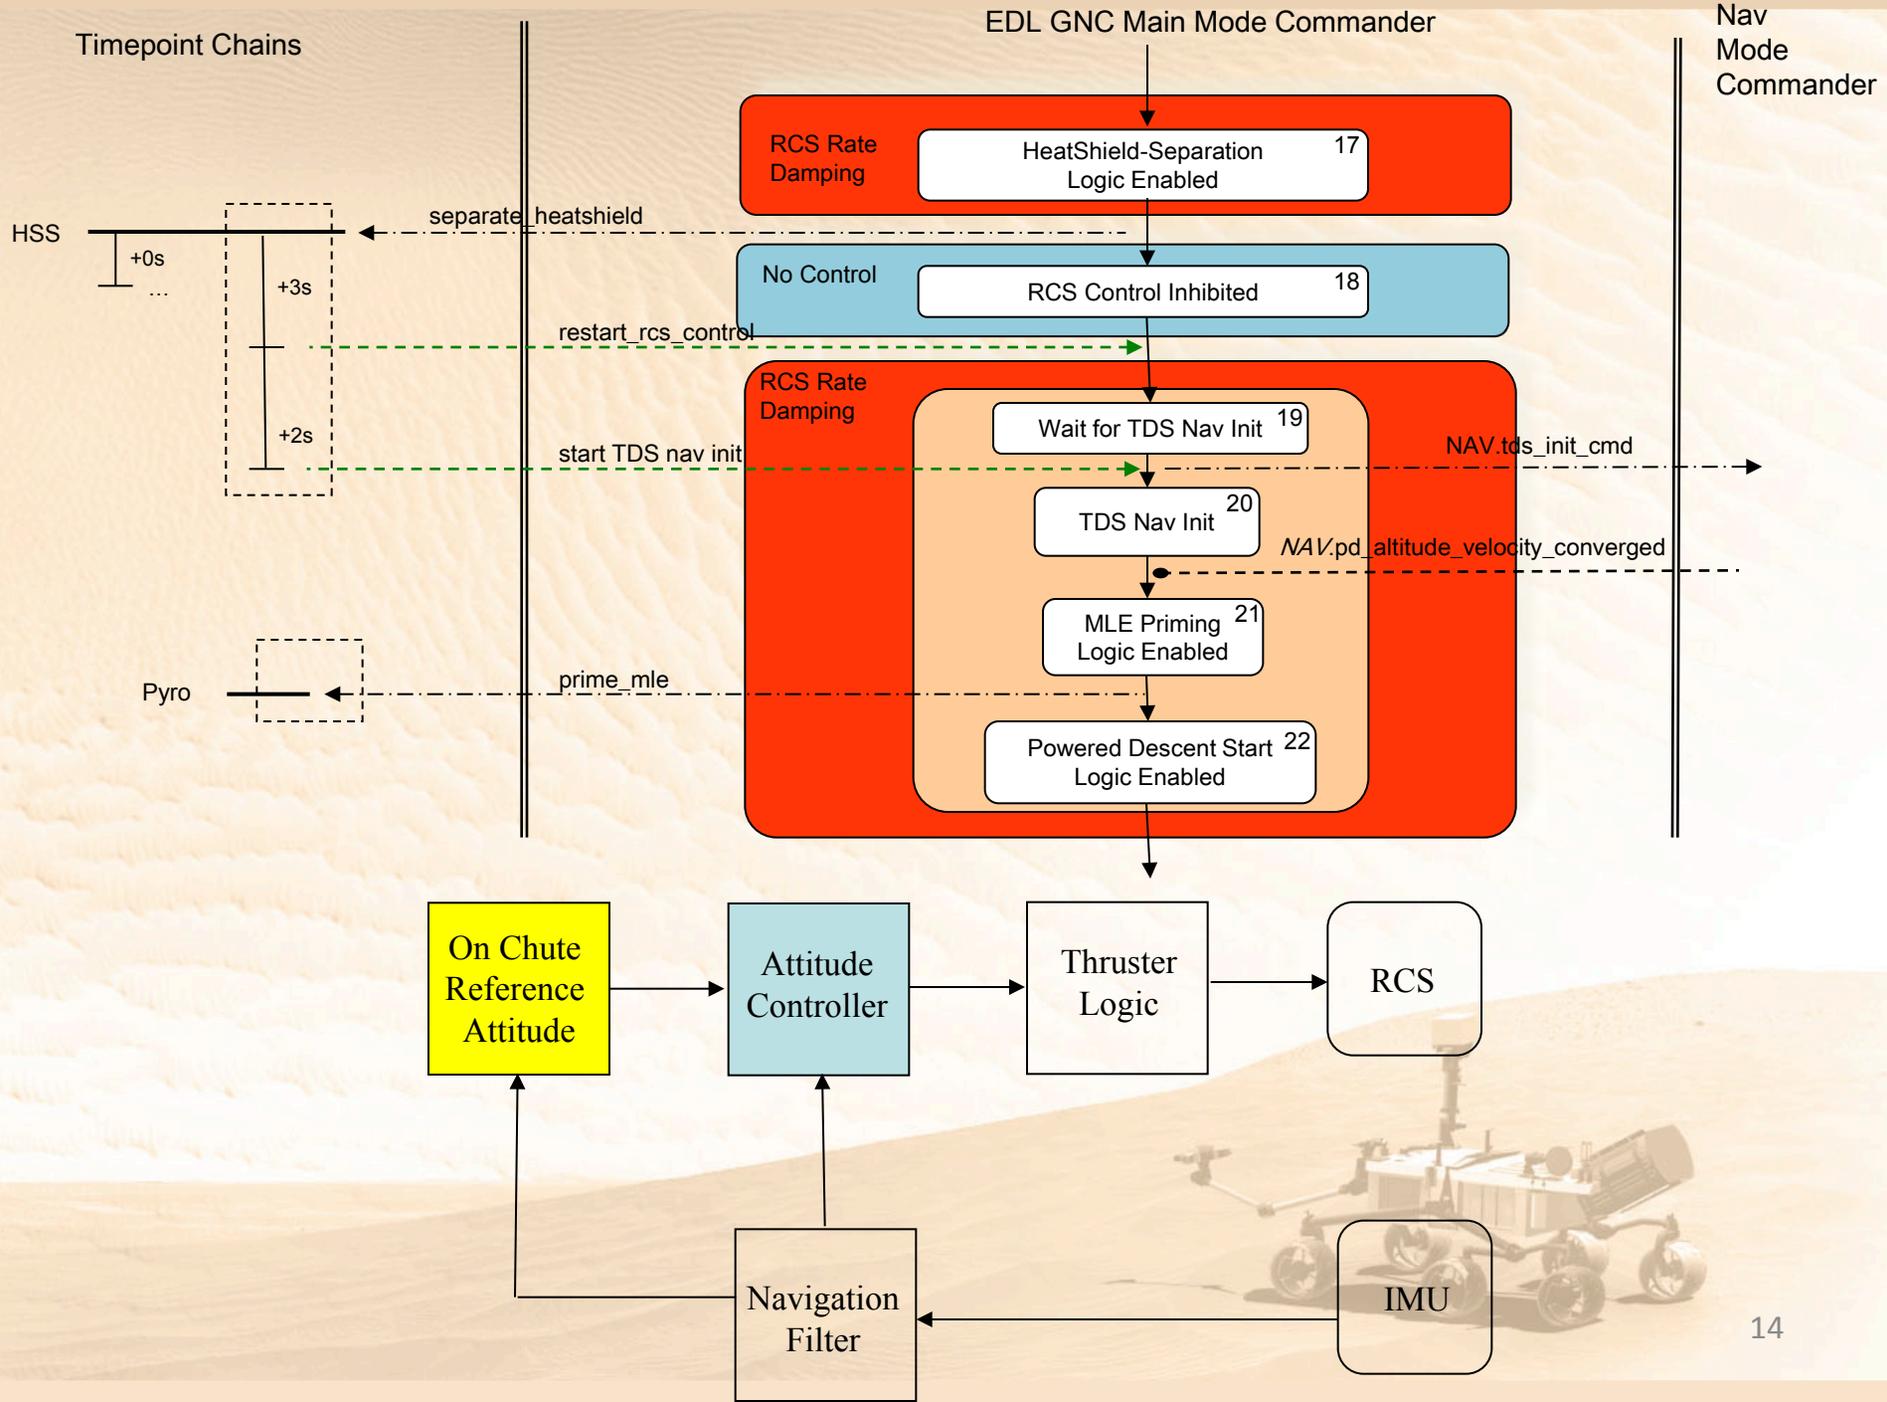





# EDL GNC Main Mode Commander: Backshell separation

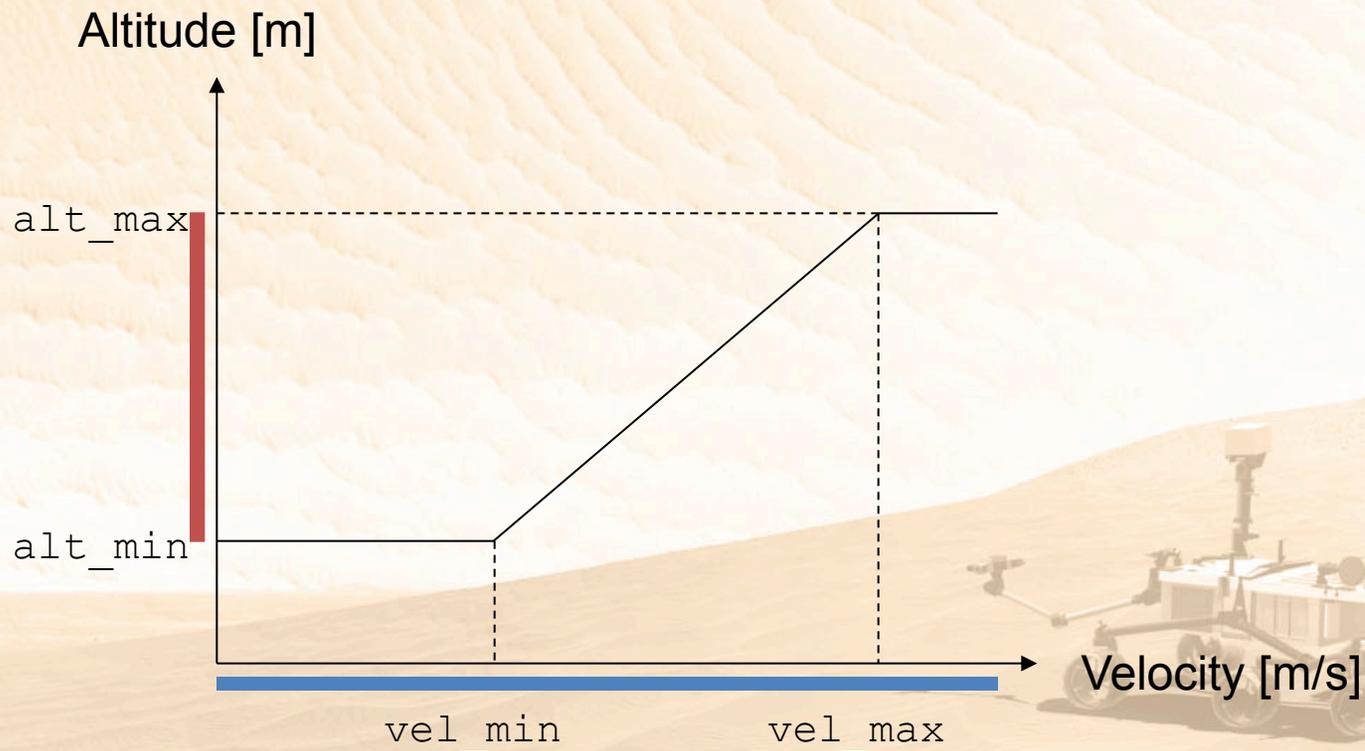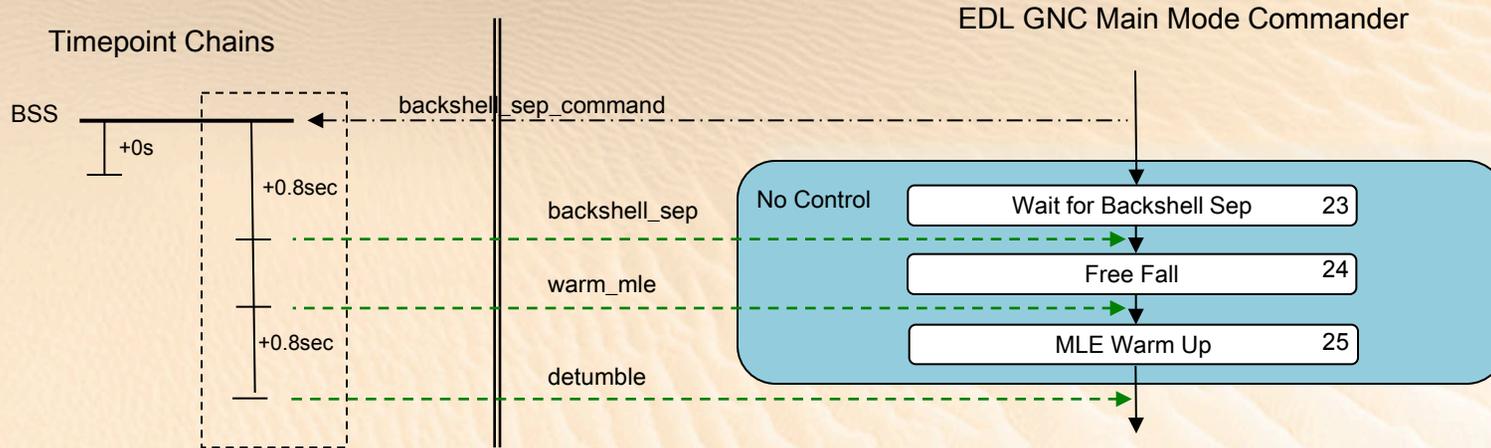



# MSL Entry, Descent, and Landing

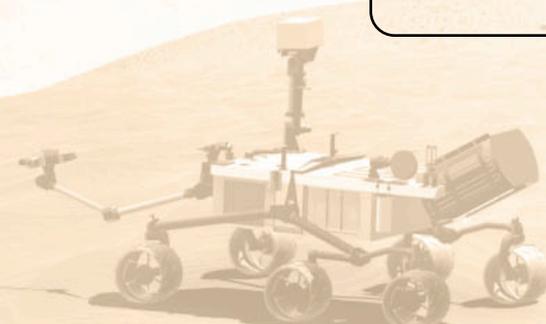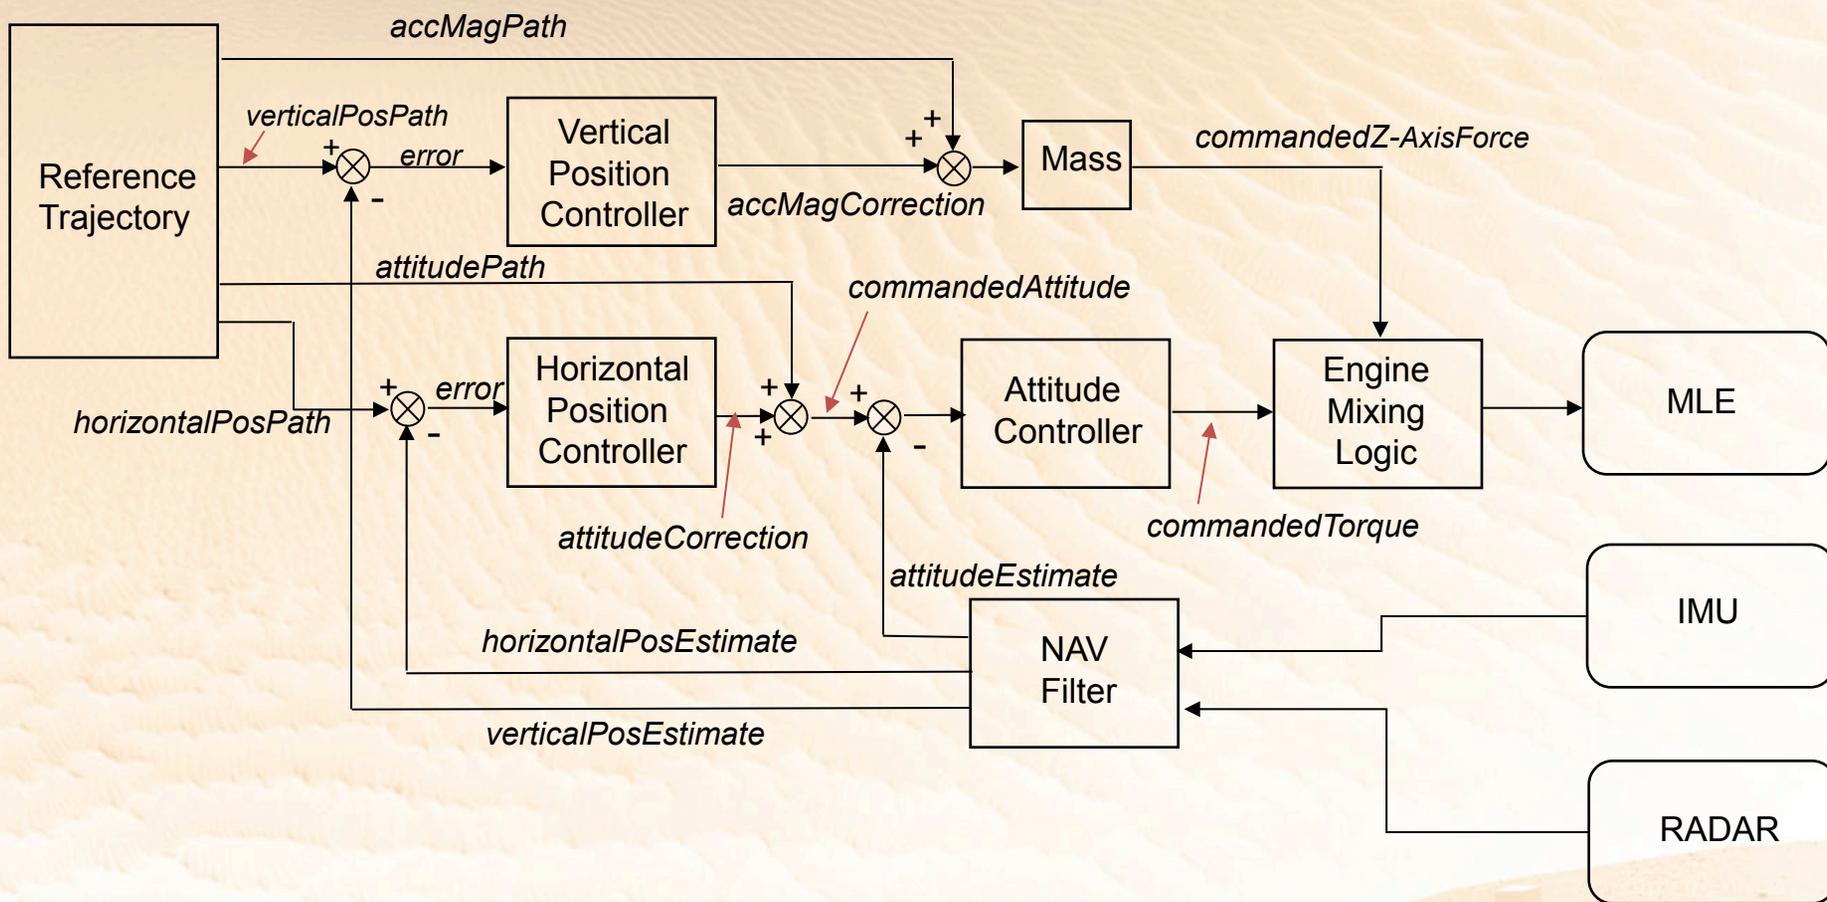




# EDL GNC Main Mode Commander: Powered Descent phase

Timepoint Chains


detumble

EDL GNC Main Mode Commander

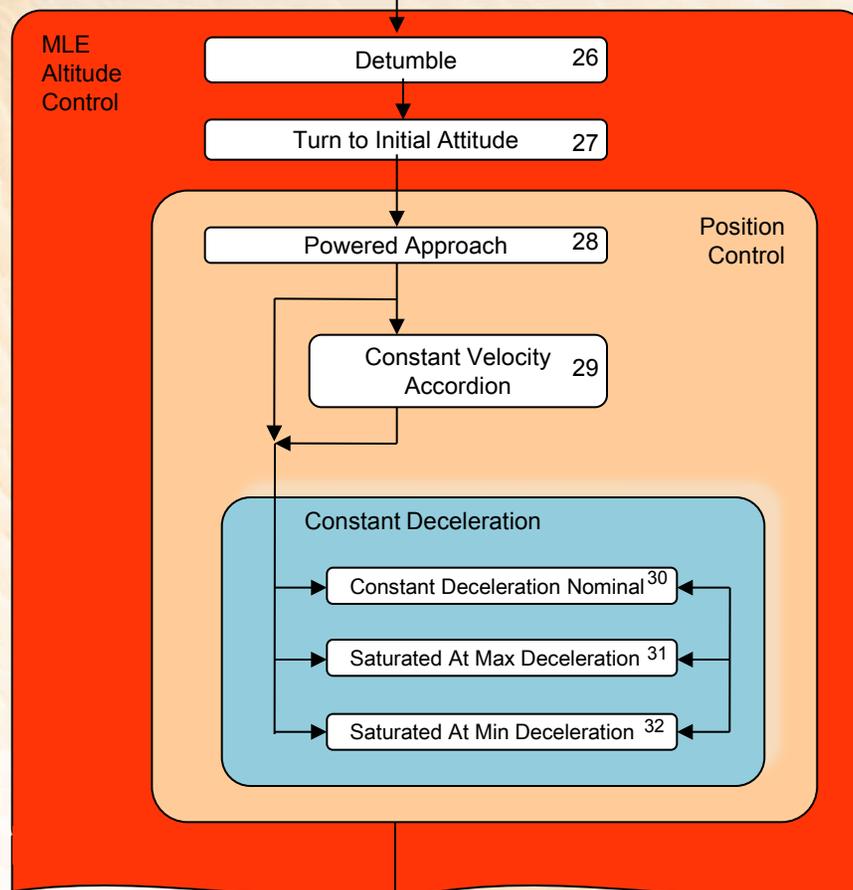




# MSL Powered Descent Altitude Error Strategy


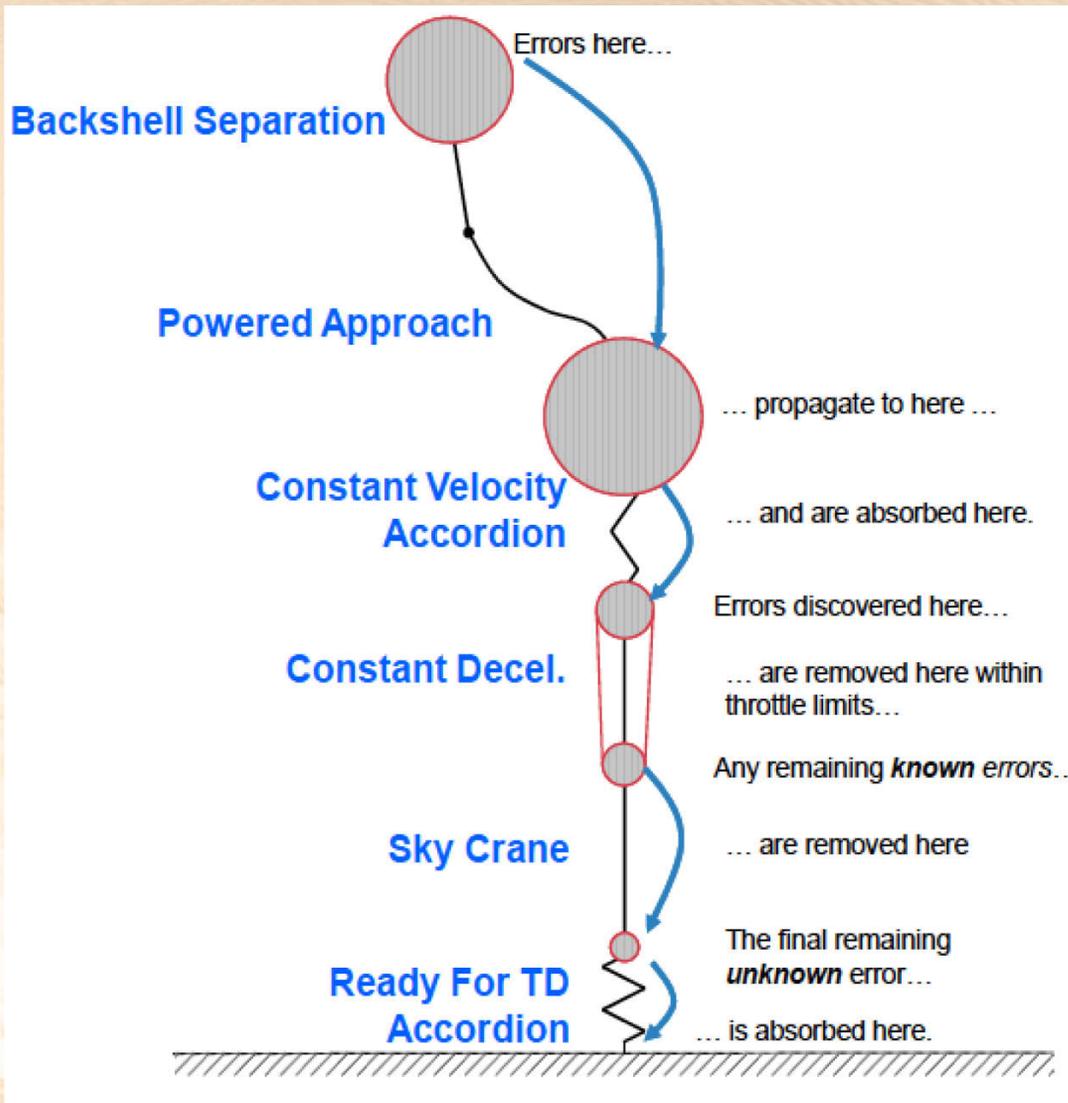


- **Altitude errors are due to:**
  - Radar measuring the terrain in the vicinity of the landing site.
  - Radar measurement errors
- **Errors are corrected via trajectory replanning capability**
  - **At mode transitions (nominal)**
  - **When large errors are encountered (off-nominal)**

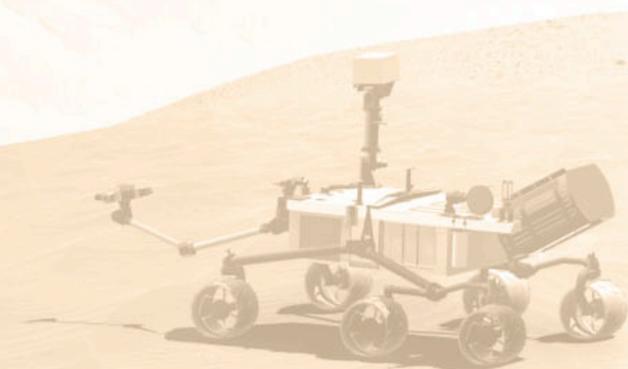








# EDL GNC Main Mode Commander: SkyCrane phase

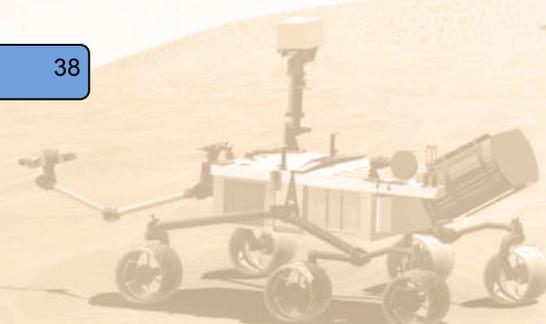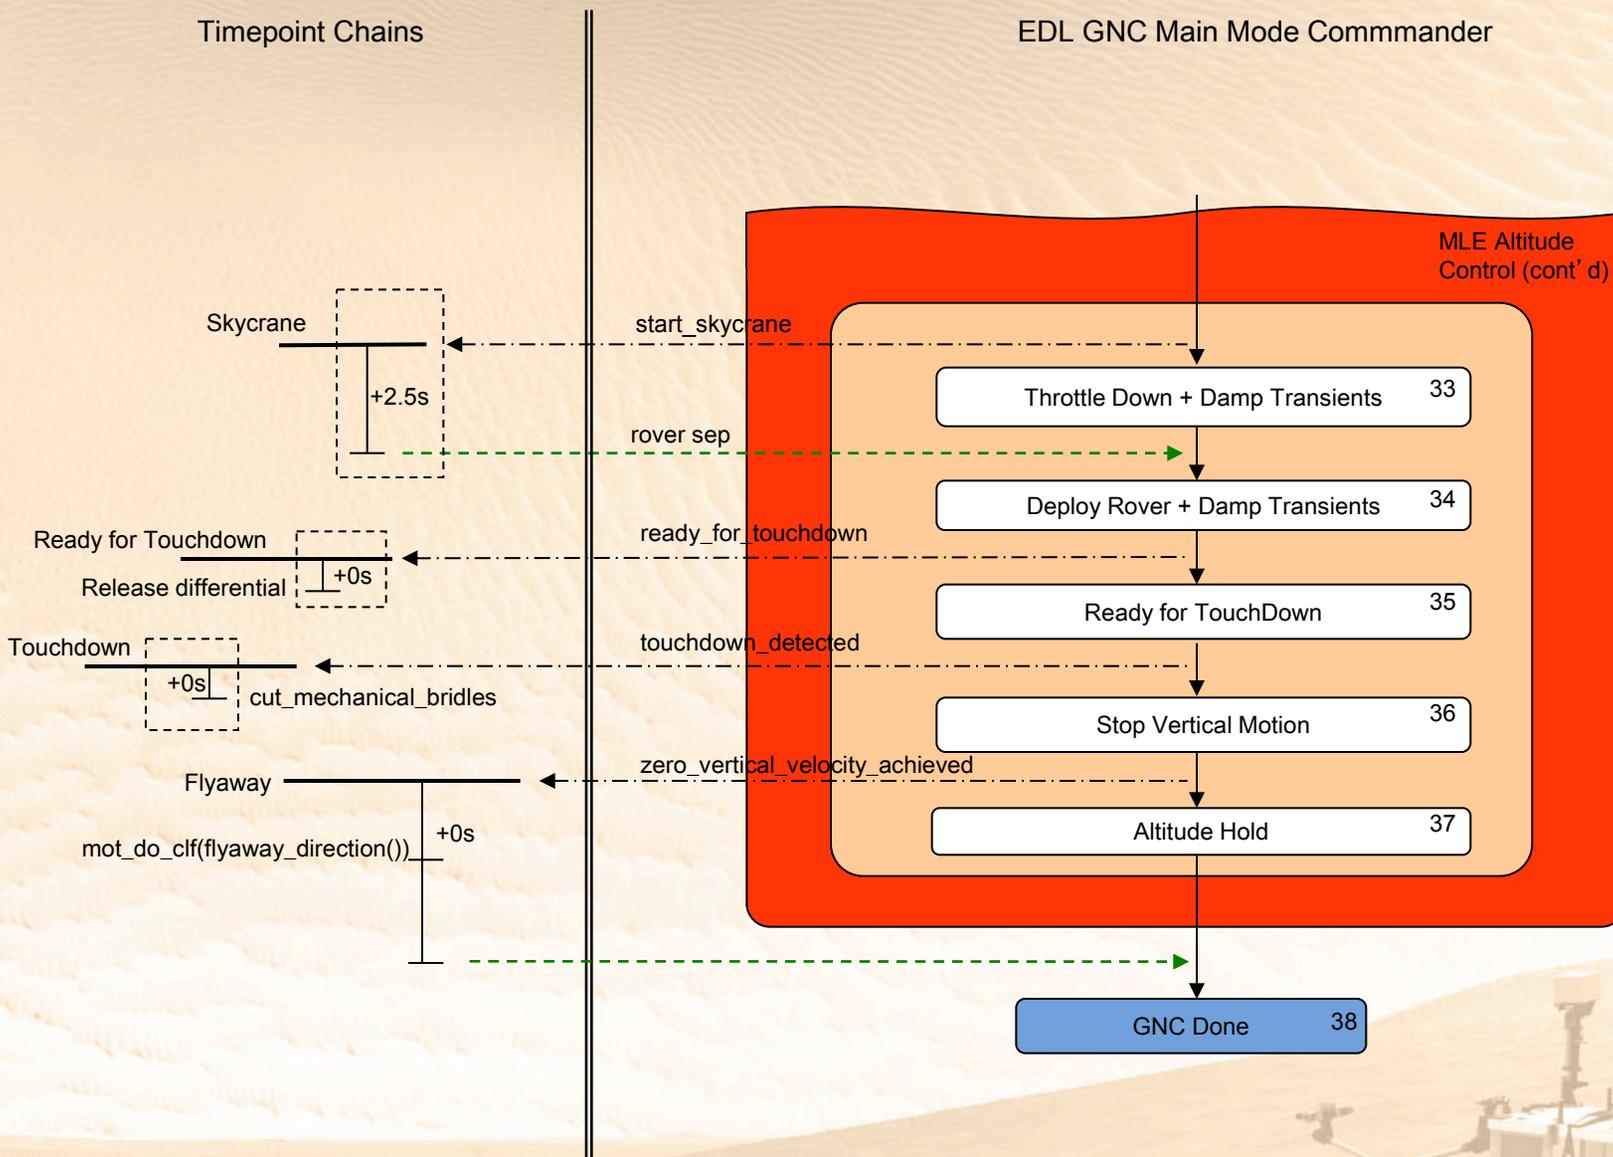



# EDL GNC Main Mode Commander: Touchdown Trigger

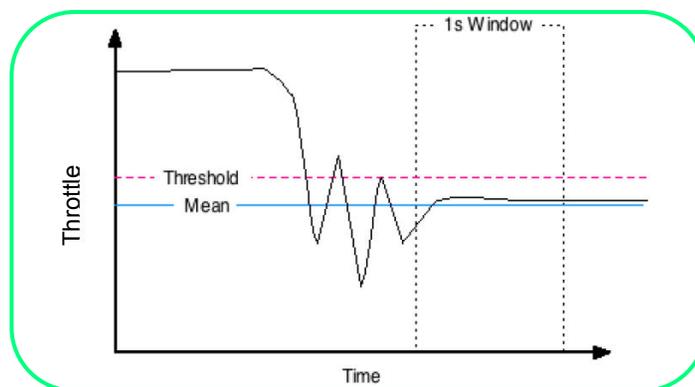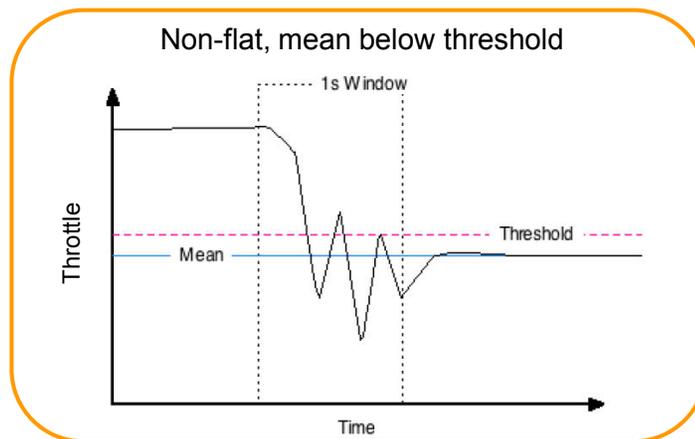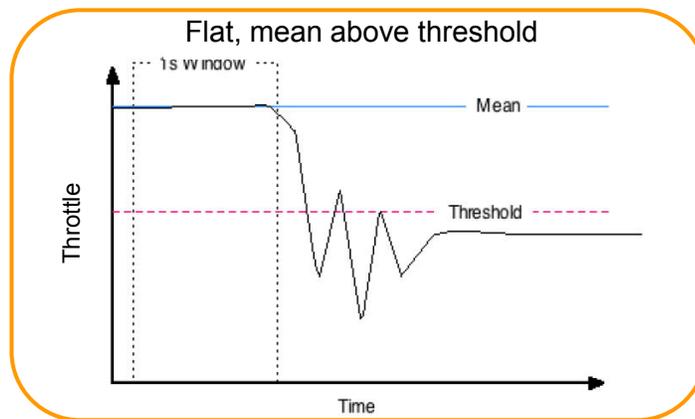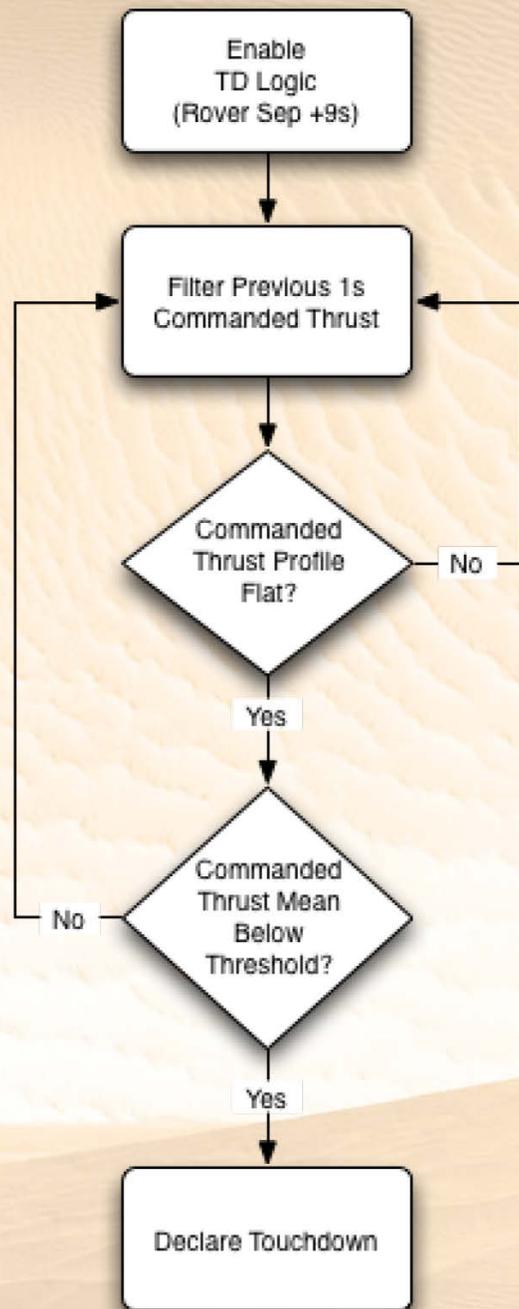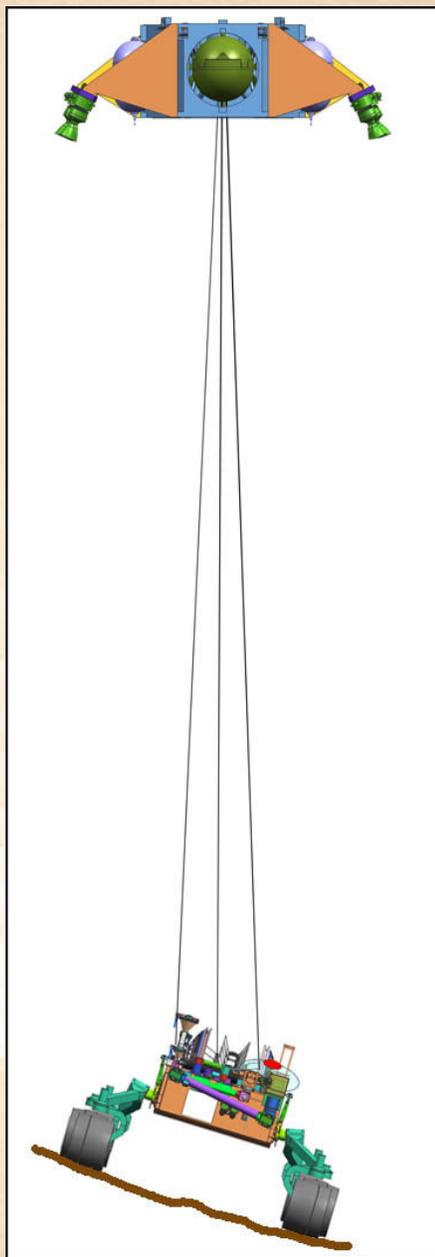



# References

P. Brugarolas et al., “MSL Entry Attitude Controller,” IPPW 7, 2010

D.M. Kipp et al. “Mars Science Laboratory Entry, Descent, and Landing Triggers,” IEEE Aerospace Conference, 2007.

R. Prakash et al. “Mars Science Laboratory Entry, Descent, and Landing System Overview,” IEEE Aerospace Conference, 2007.

M. San Martin, “MSL SkyCrane Landing – A GN&C perspective,” IPPW7, 2010

M. San Martin et al. “Mars Science Lander GN&C Design for Entry, Descent, and Landing,” International ESA GN&C Conference 2011

S. Sell, “MSL Terminal Descent Strategy and Challenges,” IPPW7, 2010

G. Singh et al. “Guidance and Control Design for Powered Descent and Landing on Mars,” IEEE Aerospace Conference, 2007.

D.W. Way et al. “Mars Science Laboratory: Entry, Descent, and Landing System Performance,” IEEE Aerospace Conference, 2007.

## **Mars Science Laboratory**

<http://mars.jpl.nasa.gov/msl>

## **Mission Video**

<http://www.jpl.nasa.gov/video/index.cfm?id=979>



Liftoff	11.25.2011*
Landing	8.6.2012*



\*predicted