

The 18th Electroactive Polymers Actuators and Devices (EAPAD) Conference, Volume 9798, March 20-24, 2016

PREFACE

This SPIE's Electroactive Polymers Actuators and Devices (EAPAD) Conference is the leading international forum for presenting the latest progress and holding discussions among the attendees regarding the capabilities, challenges and potential future directions. The conference this year was Chaired by Yoseph Bar-Cohen, JPL/Caltech, and Co-Chaired by Frédéric Vidal, University de Cergy-Pontoise (France) and it included 128 presentations.

The Conference was well attended by internationally leading experts in the field including members of academia, industry, and government agencies from the USA and overseas. This year, the Keynote speaker was Elisabeth Smela, University of Maryland, College Park (United States) and the title of her presentation was "Nastic actuators. In her presentation, she covered the progress in developing actuators that are inspired by plants, namely the use of miniature hydraulic pumping mechanisms to deliver large forces and displacements. Devices are being developed using lamination of elastomer layers and encapsulating a fluid. Propylene carbonate has been demonstrated to be an effective fluid that does not generate gas bubbles. As example of an application that is being pursued the development of smart stents with adjustable diameters has been given at her presentation.

Overall, the presented papers reported the significant progress that was made in each of the topics of the EAP field infrastructure. The topics included: theoretical modeling and analysis of eap mechanisms; improved EAP materials, processes, fabrication (including 3D printing) and characterization techniques; emerging EAP actuators (including ionic, conducting, shape memory polymers, CNT and dielectric EAP); applications of EAP materials including power generation and energy harvesting, robotics, haptic, tactile, and other sensors. This year, the Special Session has been dedicated to "Celebrating the 10th Anniversary of the Dielectric Elastomer Minimum Energy Structures (DEMES)".

The efforts described in the presented papers are showing significant improvements in understanding the electromechanical principles and better methods of dealing with the challenges to the materials applications. Researchers are continuing to develop analytical tools and theoretical models to describe the electro-chemical and -mechanical processes, non-linear behavior as well as methodologies of design and control of the activated materials. EAP with improved response were described including dielectric elastomer, IPMC, conducting polymers, gel EAP, carbon nanotubes, and other types. Specifically, there seems to be a significant trend towards using dielectric elastomers as practical EAP actuators. Interesting presentations include the invited paper by Markus Henke, Iain A. Anderson, The University of Auckland (New Zealand) describing autonomous artificial muscle robots without electronics. Also, a team that was led by Federico Carpi, Queen Mary, Univ. of London (United Kingdom) have reported the formation of standards for dielectric elastomer transducers. The formation of standards for the field of EAP is an important step towards a wide commercialization of the technology.

This year, the conference included a half-day course about electroactive polymers, and the instructors were Yoseph Bar-Cohen, Jet Propulsion Lab/Caltech., Pasadena, CA; John Madden, U. of British Columbia, Vancouver, Canada; and Qibing Pei, University of California, Los Angeles. Also, an EAP-in-Action Session was held and it consisted of the following 9 demonstrations with presenters from China, Germany, Great Brittan, New Zealand, Singapore, Switzerland, and USA.

In closing, I would like to extend a special thanks to all the conference attendees, session chairs, the EAP-in-Action demo presenters, the members of the EAPAD program organization committee. In addition, special thanks are extended to the SPIE staff that helped making this conference a great success.

Yoseph Bar-Cohen
Chair, 2016 EAPAD
JPL/Caltech, Pasadena, CA

APPENDIX – THE 2016 EAP-IN-ACTION PROGRAM

Moderator:



Yoseph Bar-Cohen, Jet Propulsion Lab.

The 2016 EAP-in-Action Session highlighted some of the latest capabilities and applications of Electroactive Polymer (EAP) materials where the attendees were shown demonstrations of these materials in action (**Figure 1**). Also, the attendees were given an opportunity to interact directly with the presenters as well as have been given “hands-on” experience with the presented technology. The first Human/EAP-Robot Armwrestling Contest was held in 2005 during this session. In 2017, another EAP robotic arm is expected to participate.



Figure 1: A view of the presenters and the participants of the 2016 EAP-in-Action Session.

The Session in 2016 included 9 demonstrations with presenters from China, Germany, Great Brittan, New Zealand, Singapore, Switzerland, and USA. The presenters consisted of professors and their students as well as engineers from companies. The demonstrations included innovative devices and potential new products that are driven by EAP including (listed by the country of the leading presenters):

China

1. Tiefeng Li, Yuhan Xie, Guorui Li, Yiming Liang, Xuxu Yang, Yongbing Jin, Zhejiang University (China), “Soft robotics and smart SAM structures” (**Figure 2**) - In this demonstration, soft robotics and smart structures driven by dielectric elastomer were shown to produce large actuation, fast response and integrated actuation-sensing (**Figure 3**). The demonstrated materials were thermally active tough hydrogel and the objective is to use them for bio-medical applications.



Figure 2: The team from Zhejiang University (China)

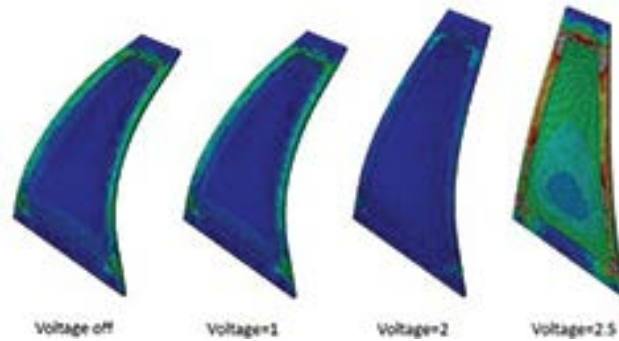


Figure 3: A model of a dielectric elastomer that produces large actuation, and fast response.

2. Liwu Liu, Jinrong Li, Fengfeng Li, Xiongfei Lv, Jinsong Leng, Harbin Institute of Technology (China), “Applications of smart polymers” (**Figure 4**) - This demonstration showed smart polymers in action taking advantage of their lightweight, fast response, and large deformation. These advantages make them attractive for applications in smart bionics, aerospace, biomedicine and other fields. The demonstration included application of shape memory polymer (SMP) and dielectric elastomer EAP as actuators and deployable structures (**Figure 5**).



Figure 4: The team from Harbin Institute of Technology (China). From left to right: Qingqing Lu, Liwu liu, Jialiang Tao and Xiongfei Lyu



Figure 5: Soft robot and soft gripping device based on DE Actuators

Germany

Steffen Hau, Alexander York, Saarland Univ. (Germany), “High force dielectric electroactive polymer (DEAP) membrane actuator” (Figure 6) - Energy efficiency, lightweight and scalability are key features to actuation applications such as valves, pumps or any portable system. DEAP technology is able to fulfill the requirements better than commonly used technology e.g. solenoid, but it has limitations concerning force and stroke. This demo showed improvements that were made in increasing the force that is delivered by DEAP stack. Two different actuators were shown: The 1st lifted 10kg and the 2nd generate 66N force while acting against a spring load (Figure 7).



From left to right: Alexander York and Steffen Hau,

Stefan Seelecke

Figure 6: The team from Germany

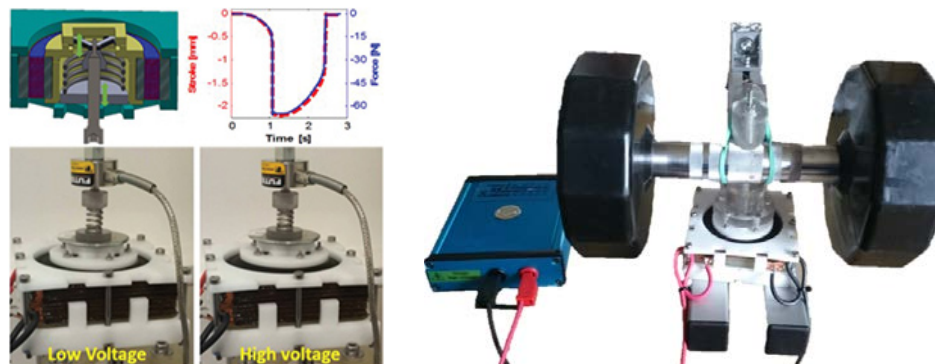


Figure 7: The two different DEAP actuators that were shown with an example of lifting 20 lbs.

New Zealand

Iain Anderson, Markus Henke, Patrin Illenberger, Andreas Tairych, Allan Veale, Chris Walker: “New technology from the Biomimetics Laboratory and StretchSense Ltd.” **(Figure 8)** - The Biomimetics Lab and its spinout company StretchSense Ltd. demonstrated EAP soft autonomous robots, wearable sensors, and energy harvesters.



Figure 8: From left to right: Allan Veale, Chris Walker, Andy Tairych, Markus Henke, Iain Anderson, Antoni Harbuz and Patrin Illenberger (Biomimetics Lab and StretchSense Ltd.)

The demos included:

- 1) Trevor the robot and Jule the Dragonfly – These EAP robots have no control electronics. By simply adding electric charge Trevor will crawl and Jule will flap her wings **(Figure 9)**.
- 2) Wearable, stretch sensitive communication – An EAP glove for gesture-based communication and game control was demonstrated.
- 3) Wearable muscles with cyber-proprioception – Using soft wearable motion sensing, the team showed how to augment ones’ strength and get machines to follow gesture based commands.
- 4) Generate electricity using EAP – The lab’s spinoff company, Stretchsense, displayed an EAP starter kit that includes a polymer generator (that you squeeze) coupled to portable electrical charge management electronics.



Figure 9: Trevor the robot

Singapore

Jian Zhu, Yuzhe Wang, Ujjaval Gupta, National Univ. of Singapore (Singapore), “Soft robots based on dielectric elastomer actuators” (**Figure 10**) - Artificial muscles were developed to mimic natural masseter muscles (superficial portion), using dielectric elastomer actuators. Soft actuators were installed onto a robotic skull, and were shown moving the jaw and the mimicking natural muscles’ displacement and velocity. Also, a worm-like robot driven by a dielectric elastomer actuator was shown (**Figure 11**).



Figure 10: The team from National University of Singapore.

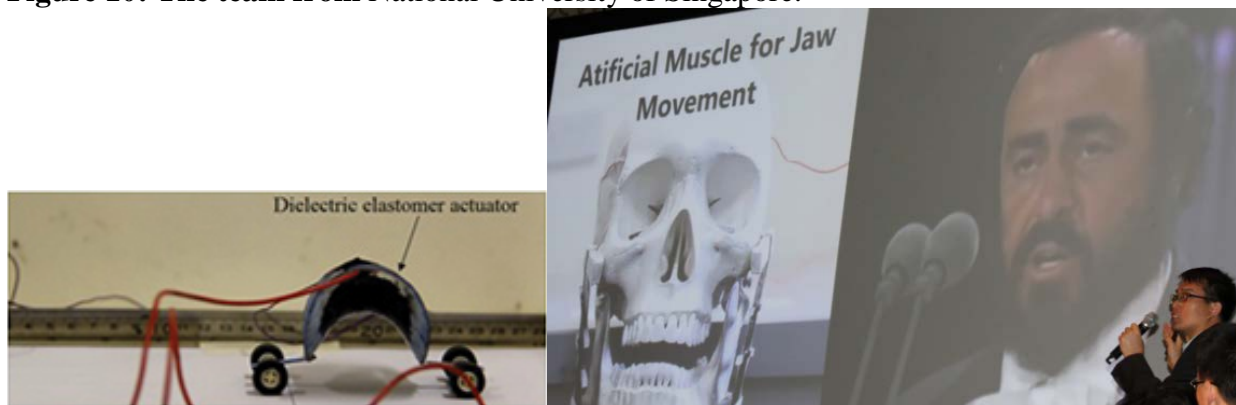


Figure 11: A demo and a video that were shown by the National University of Singapore.

Singapore and Great Brittan

Koh Soo Jin Adrian, Stoyan Smoukov*, Ang Marcelo H. Jr., Vy Khanh Vo Tran, Tan Hiok Yang, Christopher Tan, Zhang Jie, I-Ting Lin, and Tiesheng Wang, National University of Singapore (NUS) and Cambridge University, “An arm for the Armwrestling contest” – Capabilities that are going to be used to produce an antagonistic system of a wrestling arm were described and shown. The concept of driving the arm is the use of a pair of elastomers that work against each other are attached to a disc that forms the “shoulder” of the artificial arm, via (ideally) inextensible cords. Both elastomers are pre-tensioned by mechanical stretching. A wrestling arm is under development for potential demonstration at the 2017 EAP-in-Action Session.



Figure 12: Koh Soo Jin Adrian, National University of Singapore (NUS) on the left and Stoyan Smoukov, Cambridge University, on the right describing their armwrestling EAP actuator

Switzerland

Nadine Besse, Samuel Rosset, Alexandre Poulin, and Herbert Shea, Ecole Polytechnique Fédérale de Lausanne (EPFL) (Switzerland), “Tactile display based on shape memory polymers” (**Figure 13**) - A fully latching and scalable 4x4 tactile display was demonstrated to have 300 mN holding force and 300 μm motion per taxel (tactile pixel). The device, which is intended to provide graphical information to visually impaired users, consists of a shape memory polymer membrane, a compliant integrated heater per taxel, and a single common pneumatic actuation mechanism. Each taxel is individually addressable and the entire display can be refreshed in 5 seconds (**Figure 14**).


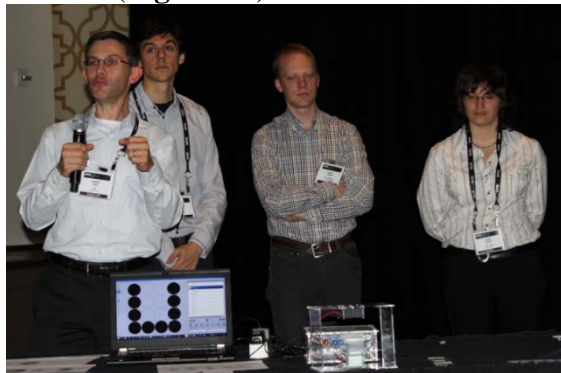


Figure 13: From left to right: Herbert Shea, Alexandre Poulin, Samuel Rosset, Nadine Besse and Vanessa Leung

Figure 14: The fully latching and scalable 4x4 tactile display

United States

1. Qi Shen, Sarah Trabia, Tyler Stalbaum, Choonhan Lee, Robert Hunt, and Kwang Kim, Univ. of Nevada, Las Vegas (United States), “Shape memory programmable and electrically controllable IPMC” (**Figure 15** and **Figure 16**)- Recently, the UNLV team successfully demonstrated an ionic polymer-metal composite (IPMC) actuator, having multiple-shape memory by two external inputs, electrical and thermal. This demonstration introduces a soft multiple-shape-memory IPMC actuator having multiple degree-of-freedom that exhibited high maneuverability when controlled by two external inputs, allowing complex motions that are routine in nature.

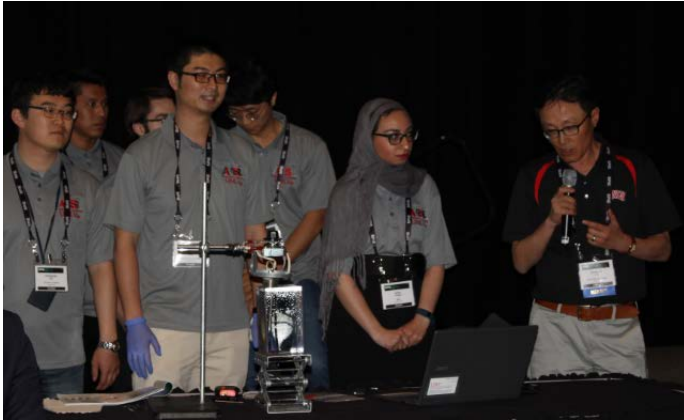


Figure 15: The team from the University of Nevada, Las Vegas (United States)



Figure 16: Shape memory programmable and electrically controllable IPMC

2. Lenore Rasmussen (**Figure 17**), Eric Sandberg, Leila Albers, Simone Rodriguez, Ras Labs, “Synthetic Muscle™: shape-morphing EAP based materials and actuators” - EAP materials that contract upon activation and expand under a reversed electric input has been shown. A thin shape-morphing film of the material in the expansion mode produces raised surface zones in desired shapes. A thick shape-morphing pad can controllably contract or expand, which are being used to prototype self-adjusting prosthetic socket liners and other void-filling continual-fit applications. These EAPs can serve as sensors, which can be tied to biofeedback, and communicate impact and pressure. The material is currently being tested for radiation resistance on the International Space Center (ISS) (see **Figure 18**).

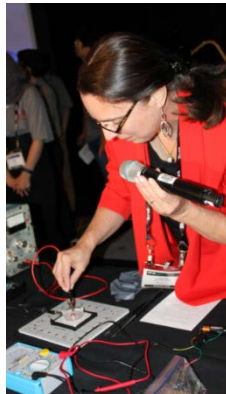


Figure 17: Lenore Rasmussen, Ras Labs.

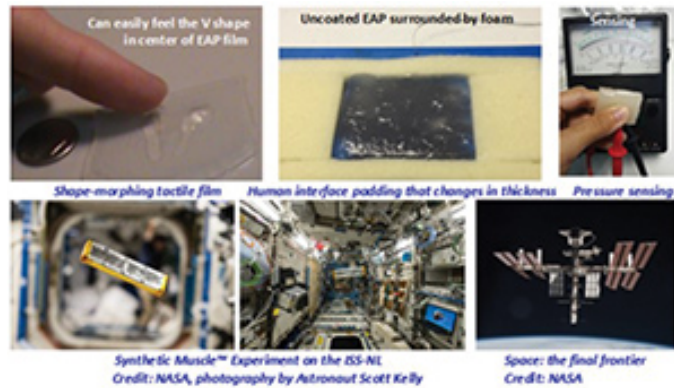


Figure 18: The Synthetic Muscle™ that is on the ISS.