
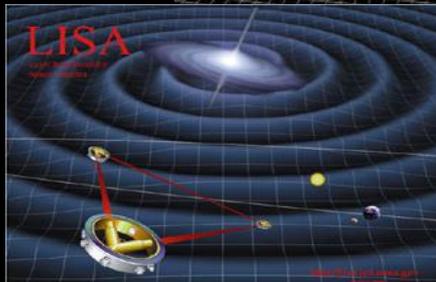


Colloid Micro-Newton Thrusters For Precision Attitude Control


John Ziemer, Colleen Marrese-Reading, and Thomas Randolph
Jet Propulsion Laboratory, California Institute of Technology

Vlad Hruby and Nathaniel Demmons, Busek Company, Inc.

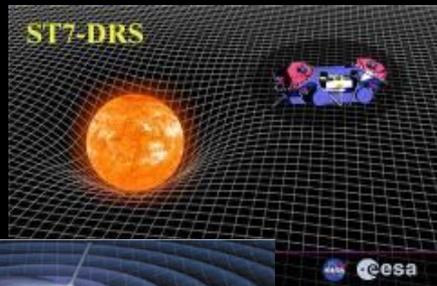

April 7, 2017

Taken from multiple, publically
available presentations

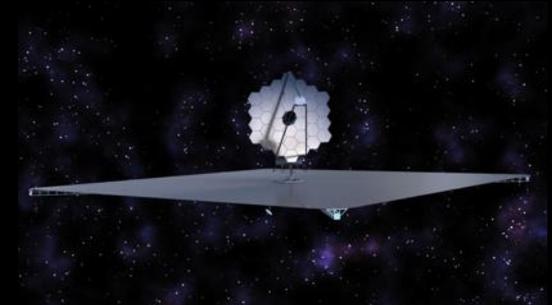





National Aeronautics and
Space Administration

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

Main S/C Disturbance: Solar Pressure

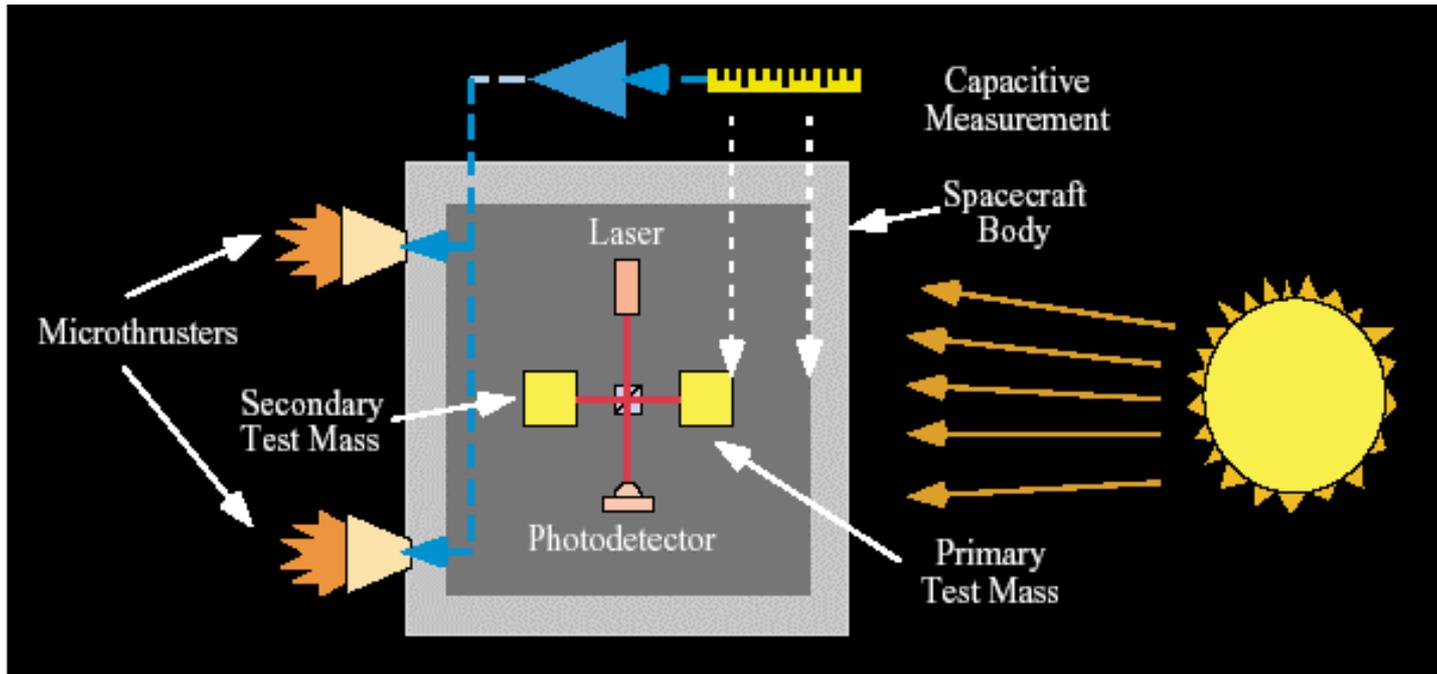

$\sim 0.1 \mu\text{N}$

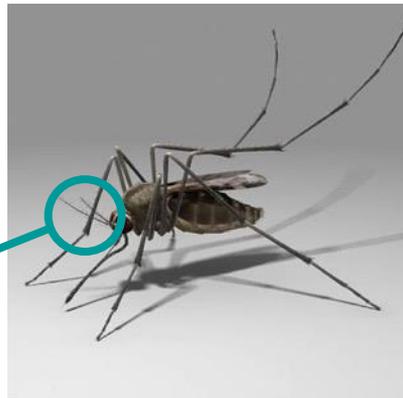

$\approx 30 \mu\text{N}$





Colloid Thruster Technology

- **Colloid Thrusters emit charged droplets that are electrostatically accelerated to produce thrust**

$$\text{Thrust} \propto I_B^{1.5} \cdot V_B^{0.5}$$

- **Current and voltage are controlled independently by adjusting the flow rate and beam voltage**
- **Precise control of I_B ($\sim \mu\text{A}$) and V_B ($\sim \text{kV}$) facilitates the delivery of micronewton level thrust with better than $0.1 \mu\text{N}$ precision**
- **The exhaust beam is positively charged, well-defined (all charged particles), and neutralized by a cathode/electron source if needed**

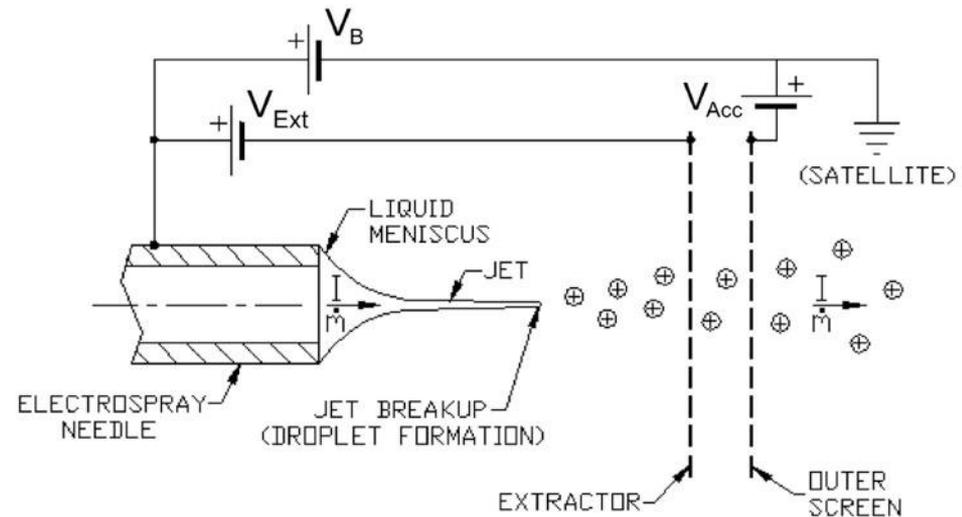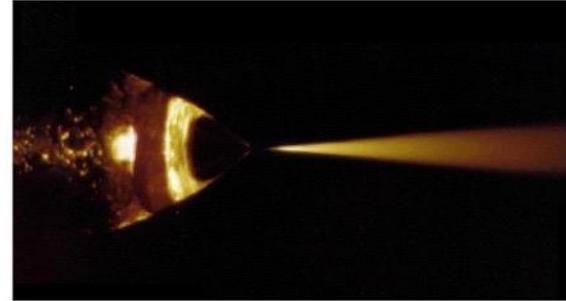

Images courtesy of Busek Co.




National Aeronautics and Space Administration

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California


Colloid Thruster History and Technical Challenges



2004

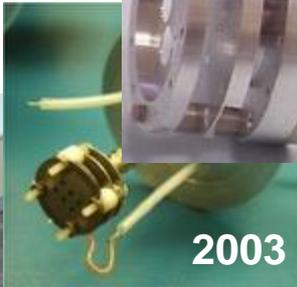

2003

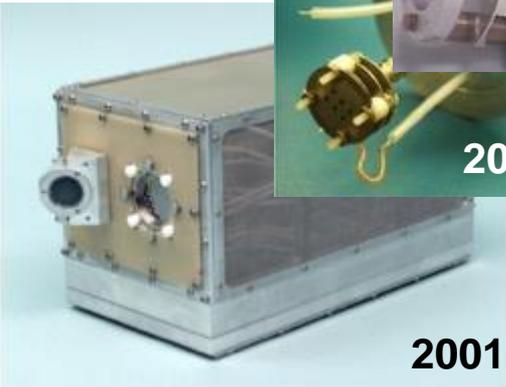


2001




2005




2007

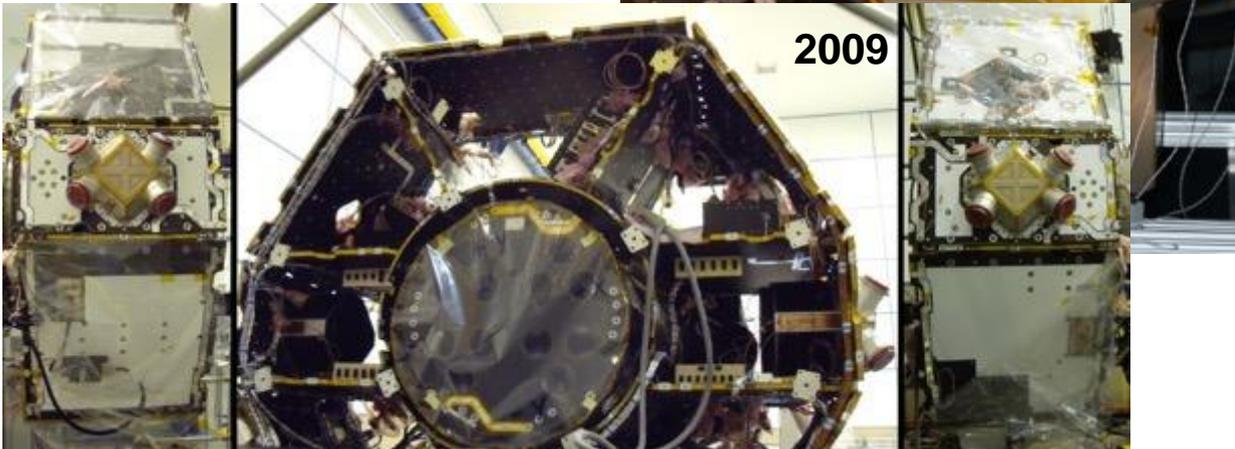



2009

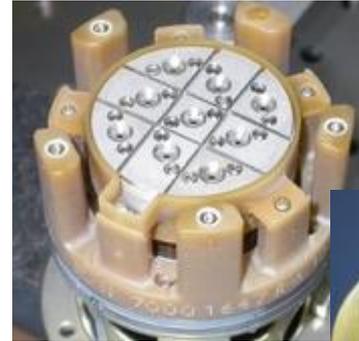

Emitters, Bubbles and Lifetime

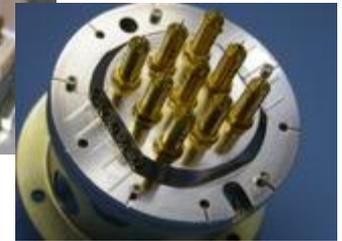

Microvalve Manufacturing

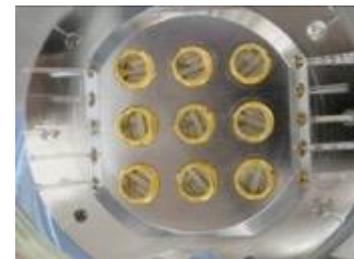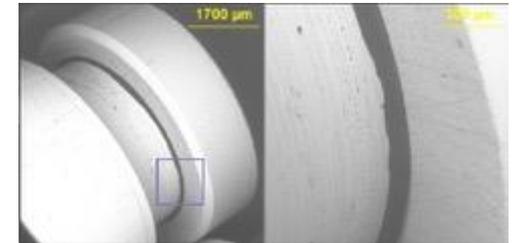

Seals and Materials



ST7 and LISA Thruster Requirements

Requirement	ST7	LISA	Demonstrated
Thrust Range	5 to 30 μN	5 to 30 μN^*	4.35 to 35.8 μN^\S
Thrust Precision	$\leq 0.1 \mu\text{N}$	$\leq 0.1 \mu\text{N}$	0.08 μN (0.01 μN calculated)
Thrust Noise	$\leq 0.1 \mu\text{N}/\sqrt{\text{Hz}}$ (5 Hz control loop)	$\leq 0.1 \mu\text{N}/\sqrt{\text{Hz}}$ (5 Hz control loop)	$\leq 0.01 \mu\text{N}/\sqrt{\text{Hz}}$ (3e-5 – 3 Hz) $\leq 0.1 \mu\text{N}/\sqrt{\text{Hz}}$ (3– 4 Hz)
DRS Drag-Free Bandwidth	1×10^{-3} to 3×10^{-2} Hz	3×10^{-5} to 1 Hz	3×10^{-5} to 4 Hz
Control Loop Bandwidth	1×10^{-3} to 4 Hz	3×10^{-5} to 4 Hz	3×10^{-5} to 4 Hz
Thrust Command Rate	10 Hz (≤ 0.1 s latency)	TBD	10 Hz (0.1 s latency, 0.4 s settle time)
Thrust Range Response Time	≤ 100 s	TBD	< 10 s
Specific Impulse	≥ 150 s	TBD	≥ 150 s (≥ 200 s typical)
Operational Lifetime	$\geq 2,160$ hours (90 days)	$\geq 40,000$ hours (~ 5 years) [†]	3478 hours during FLT 2B (245 Ns of total impulse and 113 g of propellant)
Plume Half Angle	$\leq 35^\circ$ (includes 95% of beam current)	TBD	$< 23^\circ$ (includes 95% of beam current)

* The LISA thrust range requirement may be lower for the science phase and higher for tip-off recovery



† The LISA mission has an operational goal of 8.5 years that will require an additional 3.5 years worth of consumables

§ By calculation a range of approximately 3-50 μN is possible within the nominal operational constraints of the thruster



ST7 Microthruster System Architecture

Cluster with 4 Thruster Systems

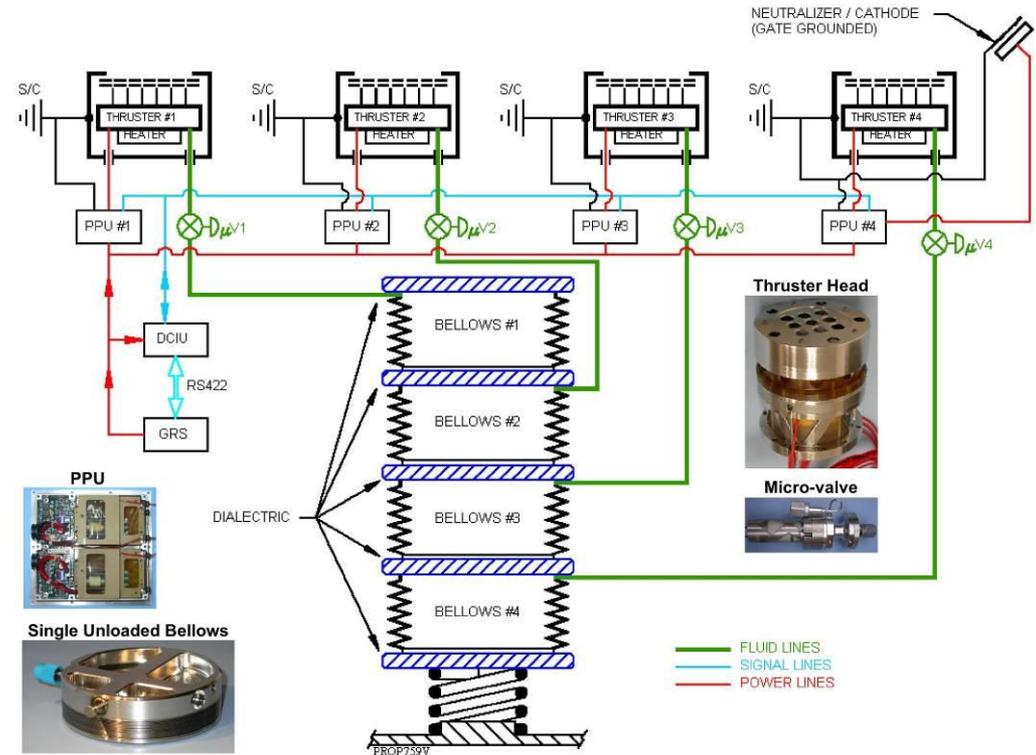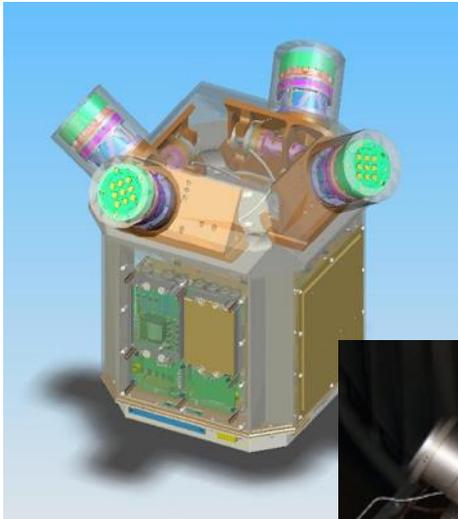



- ST7-DRS has 2 clusters with 4 thrusters per cluster
- All 8 thruster systems are identical
- There is one DCIU and neutralizer per cluster
- Thrust range: 5-30 μN from each thruster head

A single thruster system includes:

- Thruster Head (including heater)
- Microvalve (precision flow control)
- Bellows (propellant storage)
- PPU (high-voltage converters)





Thrust Stand Measurements Complete

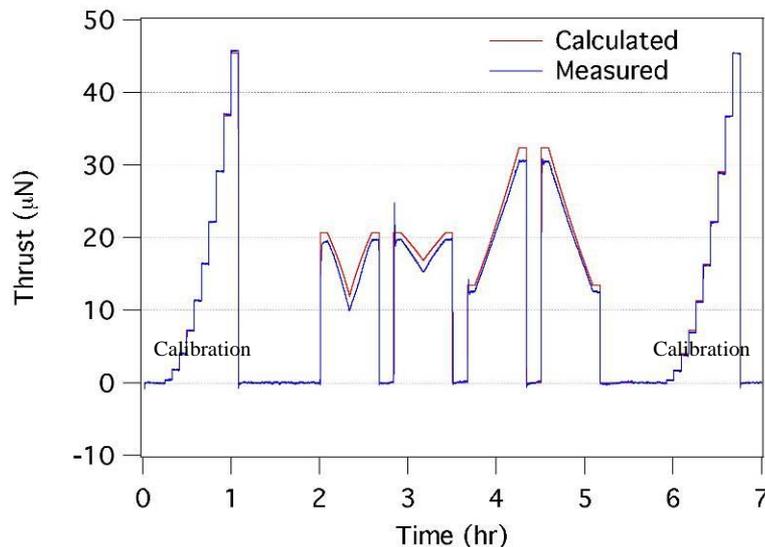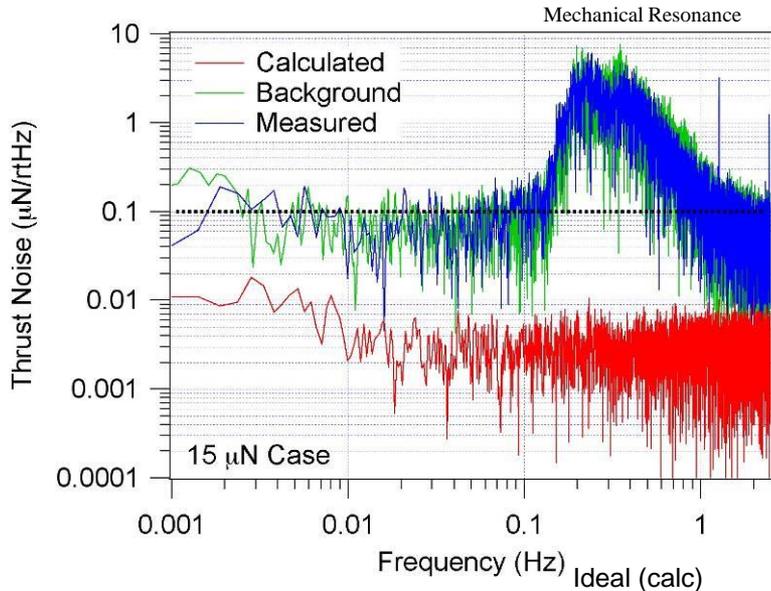


- Colloid thruster resolution and thrust noise now verified by direct measurement
- Predicted thrust relation matches well to measured data
- Busek's magnetically levitated thrust stand has remarkable resolution and background noise characteristics
 - $<0.1 \mu\text{N}$ resolution, $\sim 0.1 \mu\text{N}/\sqrt{\text{Hz}}$ equivalent background noise from 0.005 to 0.1 Hz
 - Older JPL and Busek torsional pendulum microthrust stands have 2x lower resolution with actual thrusters



Cluster 1: Passed Full Functional Test

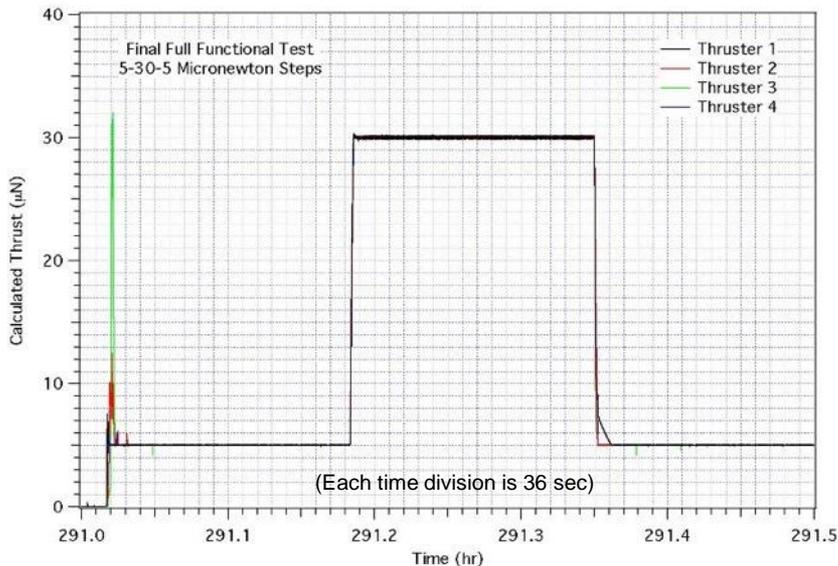
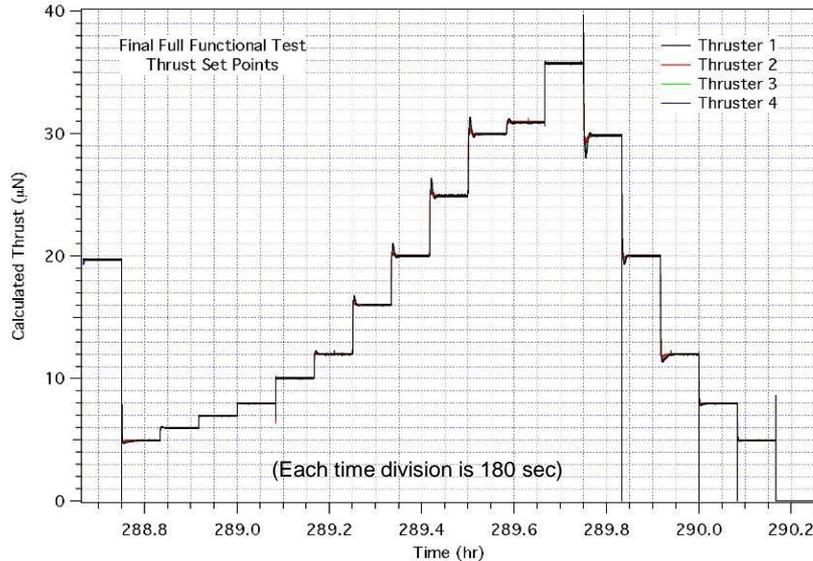


- At the end of the TVAC environmental test, Cluster 1 went through a full functional test at 20°C on all four thrusters and the cathode
- All colloid thruster systems passed through the final acceptance test without incident

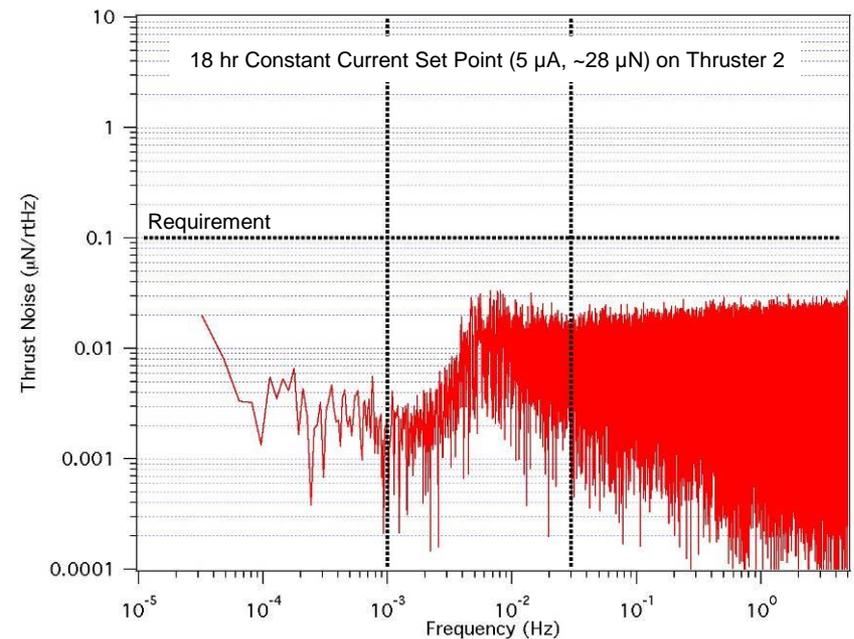




Cluster 2: Passed Full Functional Test

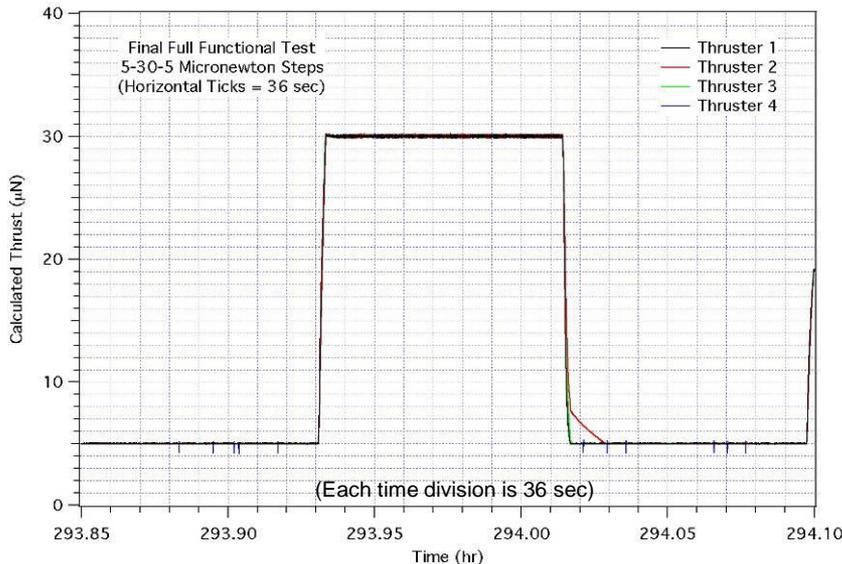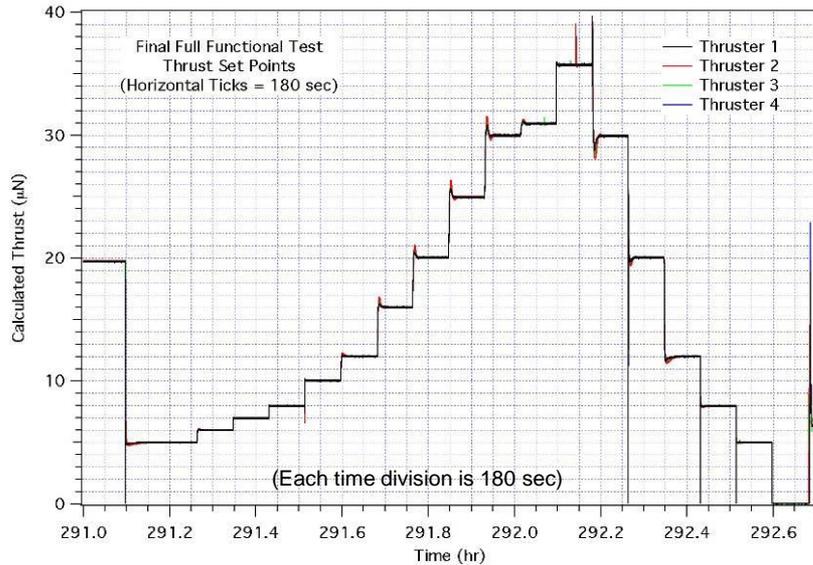


- At the end of the TVAC environmental test, Cluster 2 went through a full functional test at 20°C on all four thrusters and the cathode
- All colloid thruster systems passed through the final acceptance test without incident

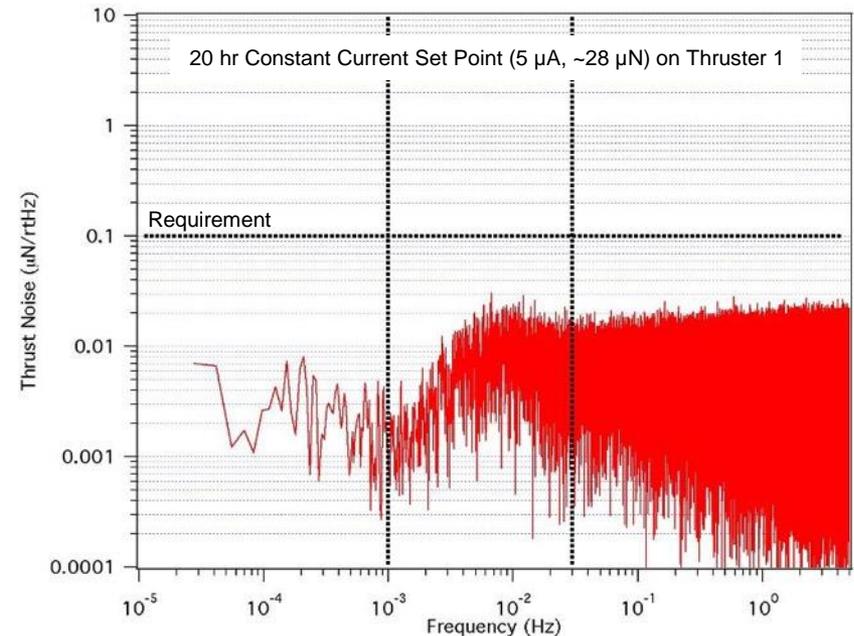





Formal Life Test of Colloid Microthruster

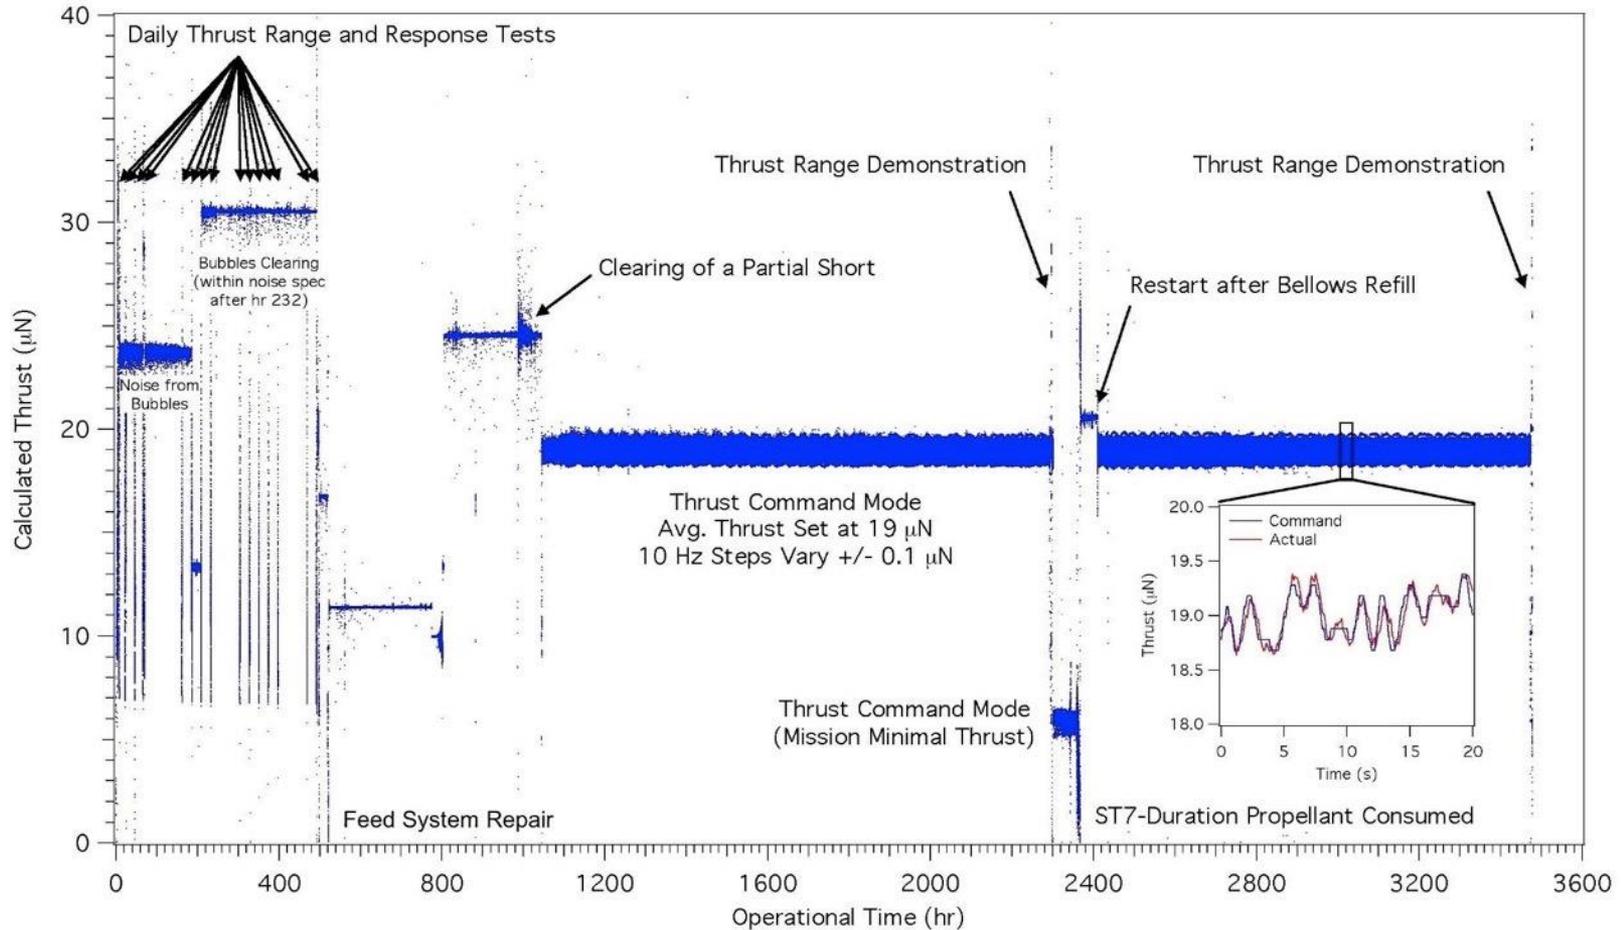

- **Requirements:** >60 day (1440 hours) mission, 90 day + 50% (3240 hours) lifetime, expected 140 Ns of impulse
- **FLT 2B** operated for 3478 hours including more than 90 days in thrust command mode, producing 245 Ns total

Beam Divergence and Thruster Lifetime

- Beam divergence losses are typically small (assuming a uniform distribution of q/M in the plume)
- During ST7 development, no beam propagation models were available, all design work done empirically, which led to significant impingement on accelerator electrode at high currents
- LISA work between 2009 and 2012 developed beam models and showed that thruster lifetime should be ~ 5 years at normal operating conditions
- Work continues to optimize the grid gaps and diameters to reduce impingement all together and extend lifetime

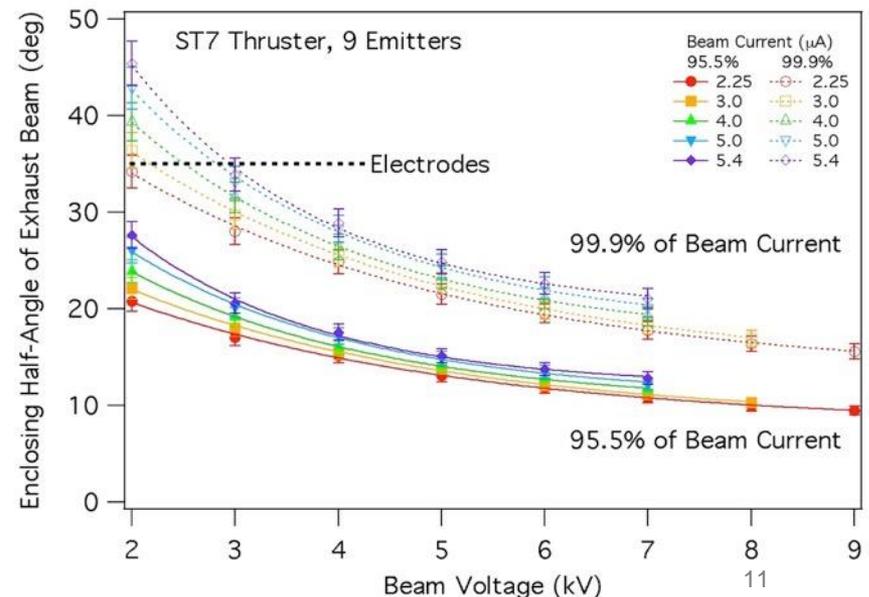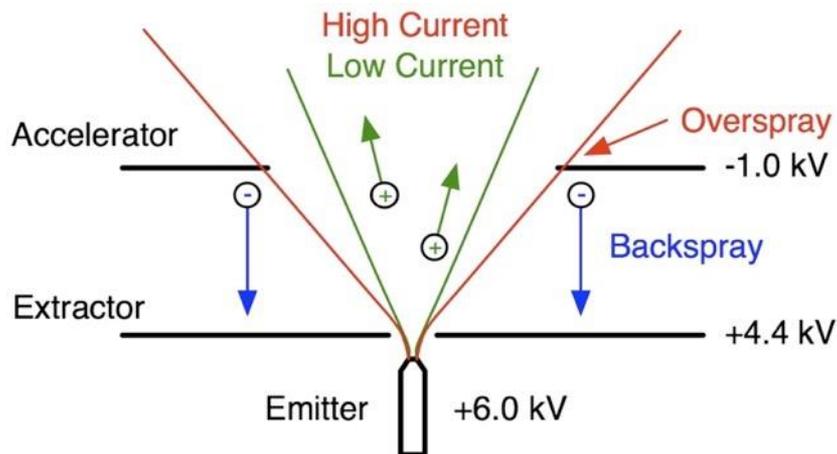



National Aeronautics and
Space Administration

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

COLLOID THRUSTERS ON LISA PATHFINDER – ST7-DRS

Space Technology 7 Disturbance Reduction System



Colloid Micro-Newton Thrusters




Life-Test complete with 3,400 hrs. of operation

Passed all proto-flight qualification level testing



Integrated Avionics Unit

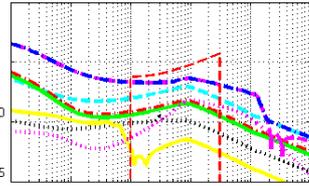

Dynamic Control System

Drag-Free Control Software and Analysis



- Project Management**
- Thruster Development*
- C&DH Software*
- Structures*
- Cabling/Harness*
- I&T and ATLO Support*
- Operations*
- Instrument Delivery*
June 20, 2008






Project Overview

Space Technology 7 - Disturbance Reduction System (ST7-DRS)

Salient Features

- Project Category: 3 Risk Class: C
- DRS flies on the ESA LISA Pathfinder spacecraft
- Sun-Earth L1 halo orbit
- Drag-free satellite to offset solar pressure
- Payload delivery: July 2009 – COMPLETE
- Launch date: December 2015
- Operational life: 2 months
- Data Analysis: 12 months

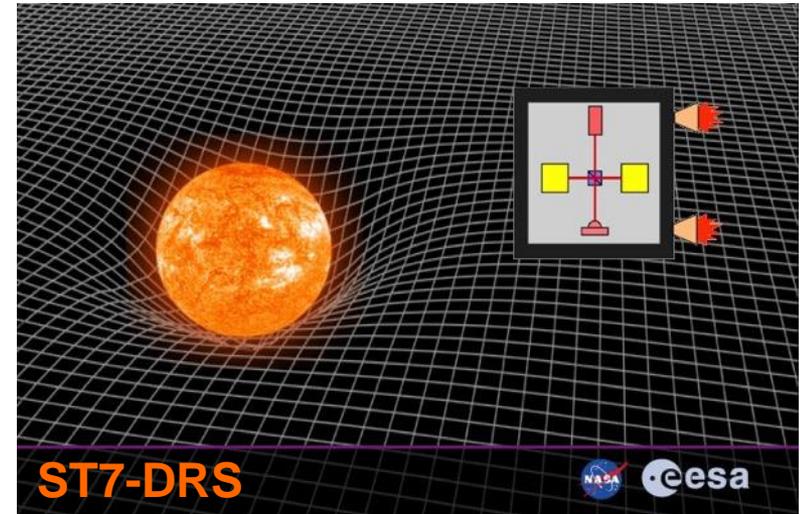

Technologies

- The Disturbance Reduction System (DRS) will validate system-level technologies required for use on future gravity and formation flying missions.
- The key new technologies are gravitational reference sensors and microthrusters.
 - DRS will validate spacecraft position control to an accuracy of $\leq 10 \text{ nm}/\sqrt{\text{Hz}}$ over frequency range of 1 mHz to 30 mHz (Precision Flight Validation Experiment)
 - With LISA Pathfinder GRS, DRS will validate that a test mass follows trajectory determined by gravitational forces only within $3 \times 10^{-14} \text{ m/s}^2/\sqrt{\text{Hz}}$ over frequency range 1 mHz to 30 mHz




National Aeronautics and
Space Administration

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California


Both Flight Clusters Delivered to JPL and ESA

Cluster 1&2 at JPL I&T Lab

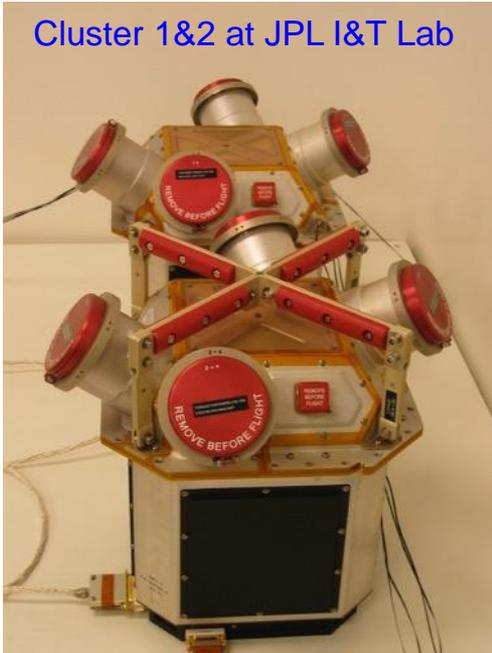

- Cluster 1 delivered to JPL in February of 2008
- Cluster 2 delivered to JPL in May of 2008
- Full DRS flight hardware and EM testbed units delivered to ESA in July 2009
- Full functional tests completed Sept. 2009
- DRS integration onto LISA Pathfinder Spacecraft completed November 2009
- Challenge remaining for LISA:
Demonstrate thruster lifetime

LISA Pathfinder Spacecraft

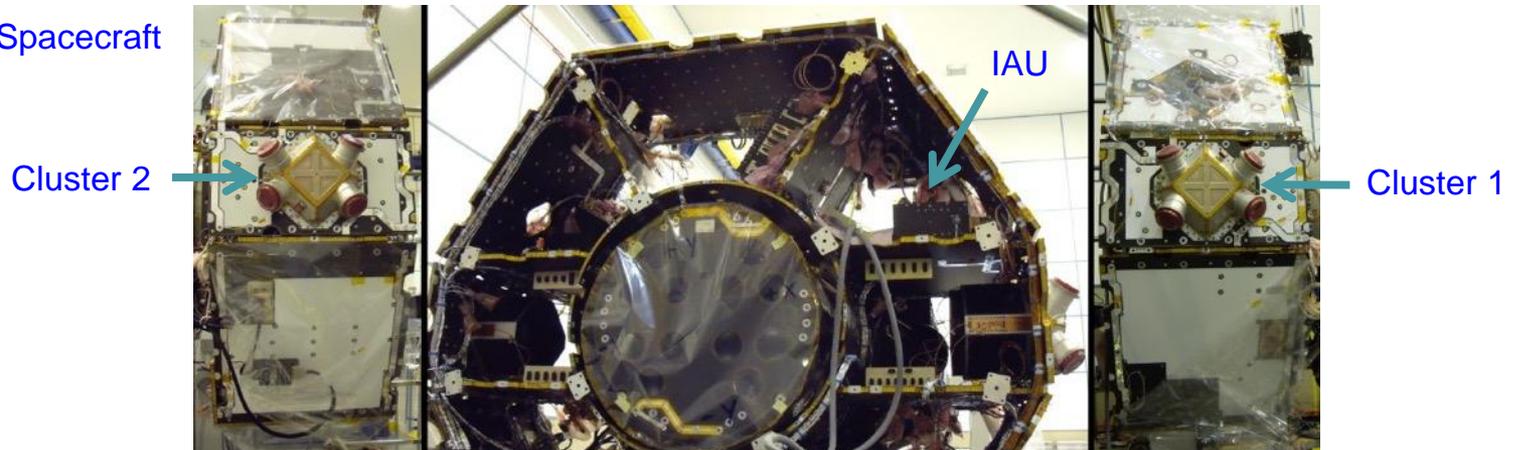


Precision Spacecraft Control Enables Gravitational Wave Measurement

ST7 has developed the lowest continuous thrust, precision propulsion and control system ever qualified for flight in the US!

Future applications include space-based gravitational wave and exoplanet observatories, large structure control, and formation flying

$10 \text{ nm} / \sqrt{\text{Hz}}$

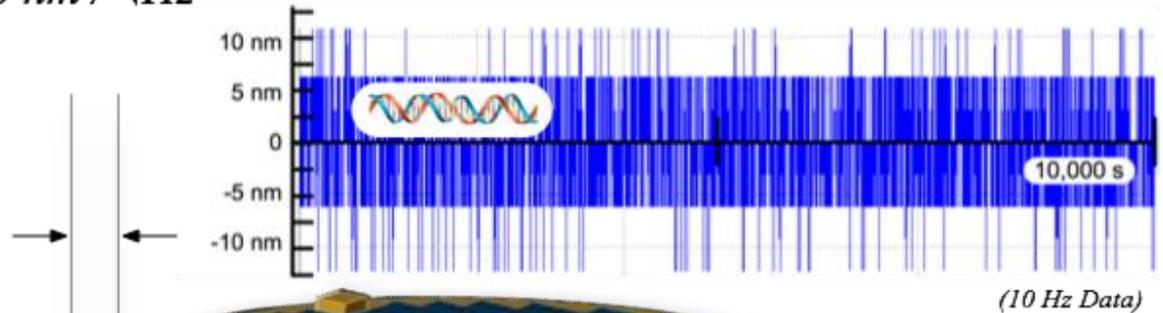

ESA's LISA Pathfinder Spacecraft

When DRS is active, S/C position noise is comparable to the diameter of a DNA Helix (2 nm)!


LISA Pathfinder Launch!



Launch from
French Guiana
December 3, 2015

Long duration
storage of colloid
thruster propellant
(8 years in tanks)
raised some
concerns, but in
the end a useful
demonstration for
future missions

Overall Mission Profile

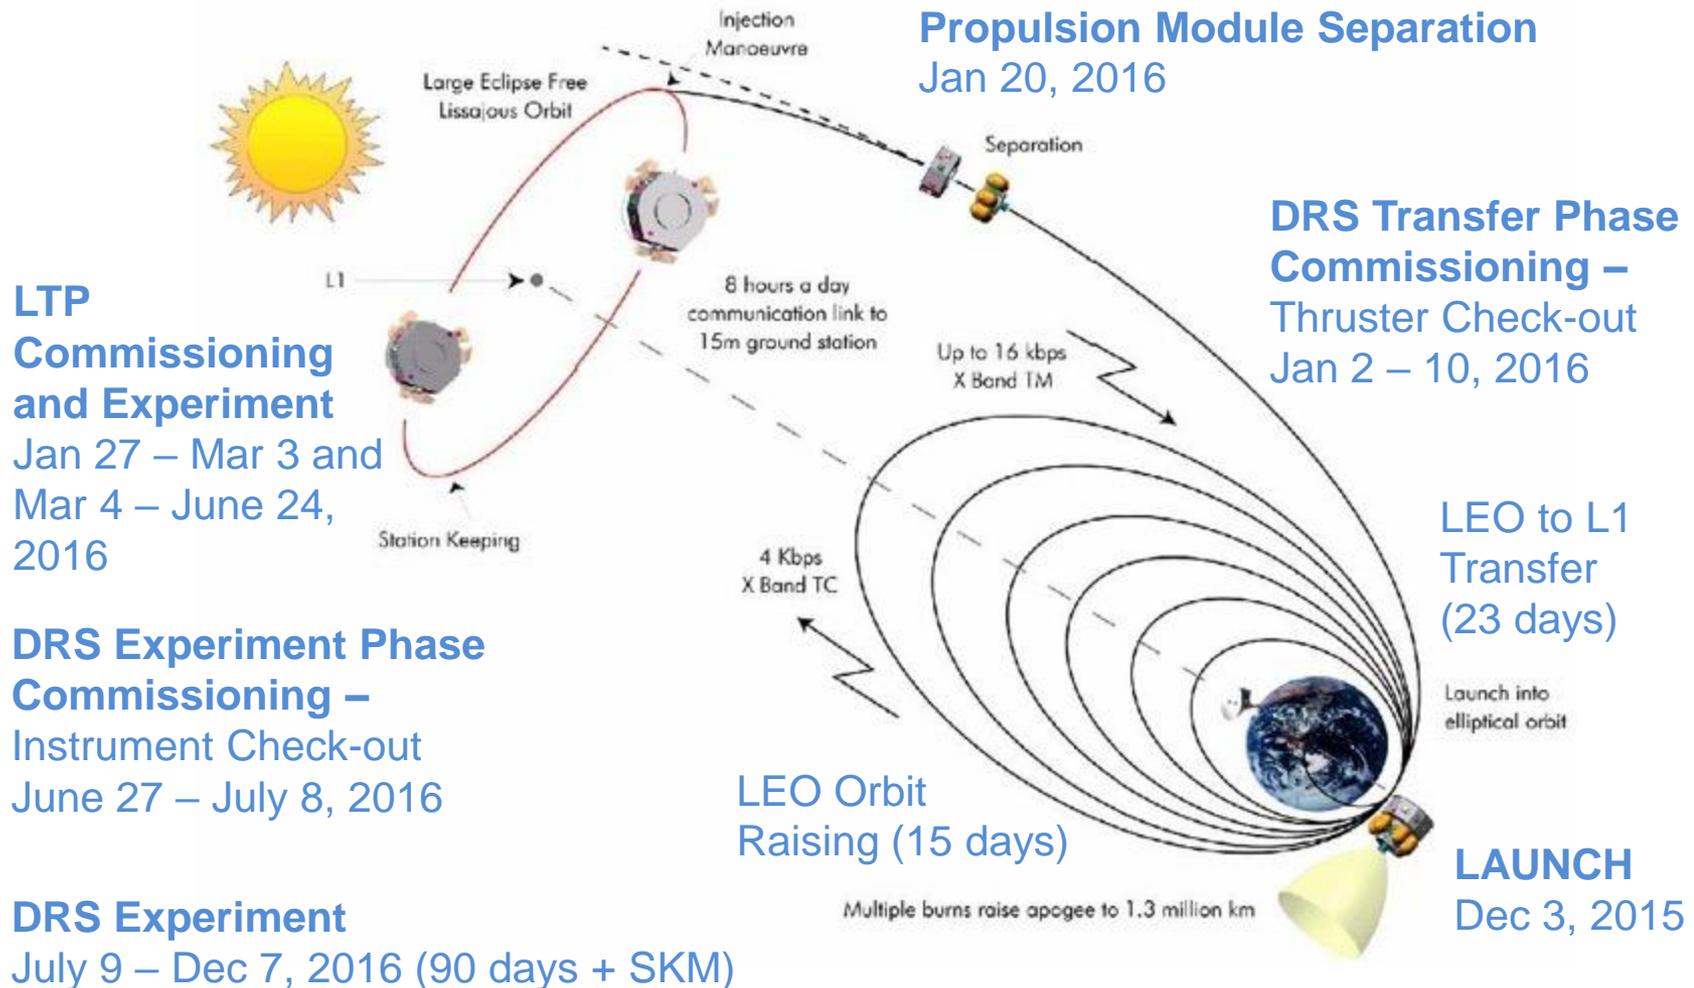

**LTP
Commissioning
and Experiment**
Jan 27 – Mar 3 and
Mar 4 – June 24,
2016

**DRS Experiment Phase
Commissioning –
Instrument Check-out**
June 27 – July 8, 2016

DRS Experiment
July 9 – Dec 7, 2016 (90 days + SKM)

Extended Mission through mid-July 2017

Propulsion Module Separation
Jan 20, 2016

**DRS Transfer Phase
Commissioning –
Thruster Check-out**
Jan 2 – 10, 2016

**LEO to L1
Transfer
(23 days)**

Launch into
elliptical orbit

LAUNCH
Dec 3, 2015

Multiple burns raise apogee to 1.3 million km

**LEO Orbit
Raising (15 days)**

4 Kbps
X Band TC

Up to 16 kbps
X Band TM

8 hours a day
communication link to
15m ground station

Station Keeping



Large Eclipse Free
Lissajous Orbit

Injection
Manoeuvre

Separation




L1

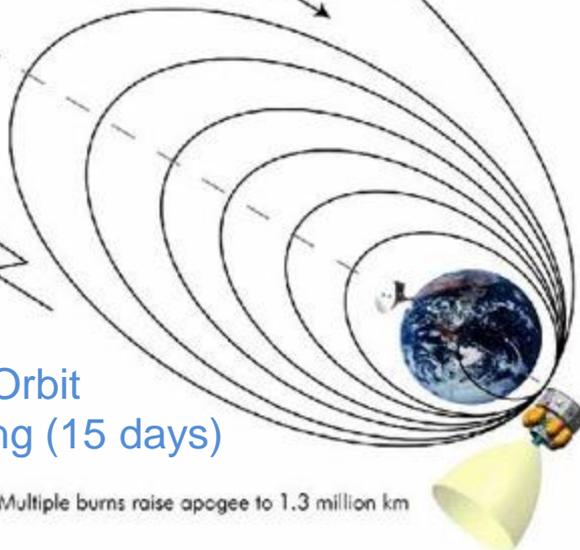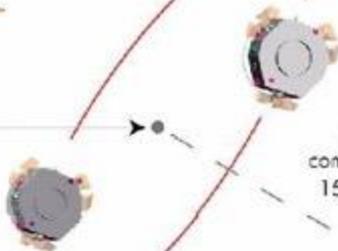


Results from Drag-Free Operation

**Results Show Meeting L1 Requirement,
<10 nm/√Hz position stability**

Position Noise in Drag-Free Mode

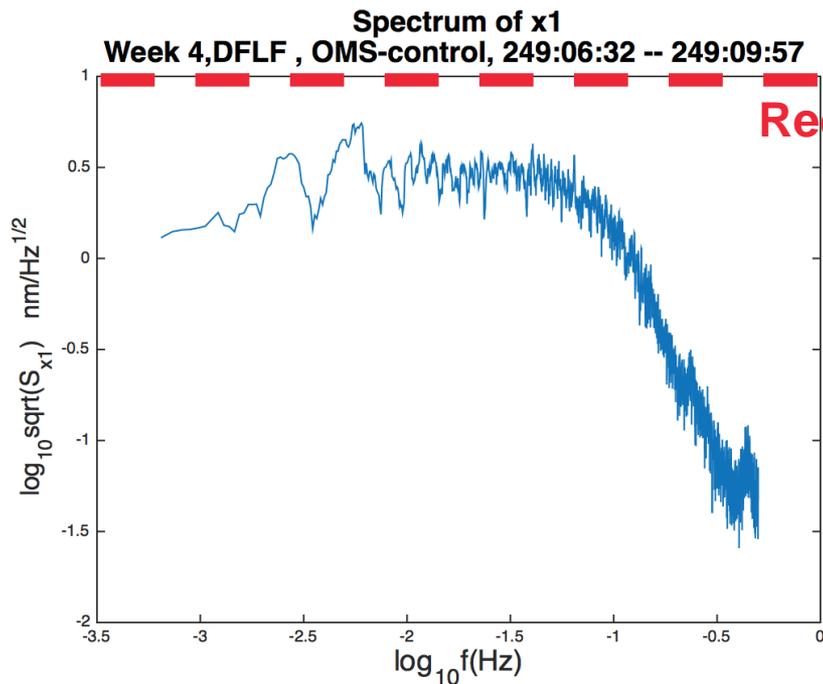


Position Noise in Science Mode

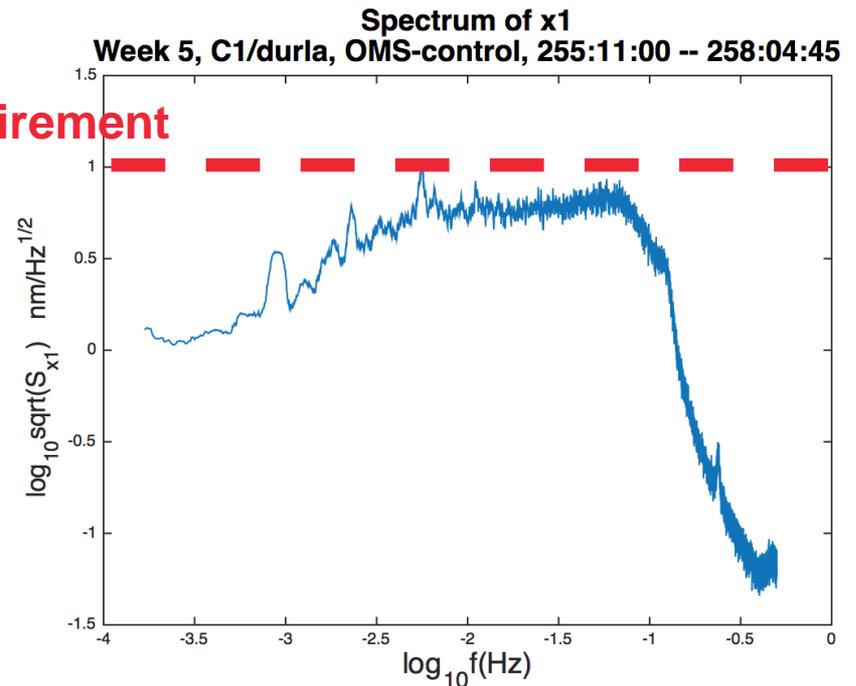

Thrust Noise Measurements

*Results Show Meeting L1 Requirement,
<0.1 $\mu\text{N}/\sqrt{\text{Hz}}$ System-Level Thrust Noise*

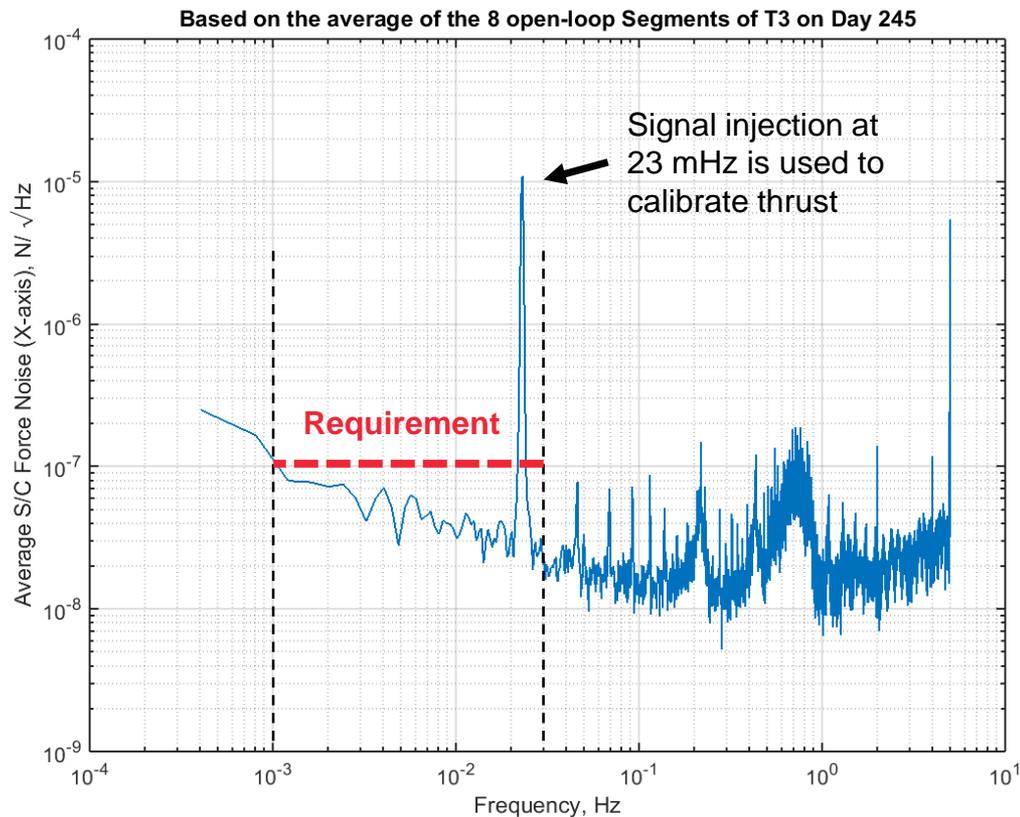

ST7-DRS Level 1 Requirements

Requirement	Full Success Criteria	Original Minimum Goals
Position control; 1-30 mHz	10 nm/ $\sqrt{\text{Hz}}$	100 nm/ $\sqrt{\text{Hz}}$
Drag-free sensor*	5 nm/ $\sqrt{\text{Hz}}$	50 nm/ $\sqrt{\text{Hz}}$
Propulsion system noise; 1-30 mHz	0.1 $\mu\text{N}/\sqrt{\text{Hz}}$	0.5 $\mu\text{N}/\sqrt{\text{Hz}}$

After successful commissioning, all L1 Requirements are looking good

- ✓ 1. DRS shall demonstrate ability to control spacecraft position within 10 nm/ $\sqrt{\text{Hz}}$ on the sensitive axis over a frequency range of 1 mHz to 30 mHz
 - Derived from LISA requirement of necessary position noise along sensitive axis
 - Requires LTP position sensing noise to be ≤ 5 nm/ $\sqrt{\text{Hz}}$
- ✓ 2. DRS shall demonstrate a spacecraft propulsion system with noise less than 0.1 $\mu\text{N}/\sqrt{\text{Hz}}$ over a frequency range of 1 mHz to 30 mHz
- ✓ 3. DRS shall perform flight qualification of a Colloid Micro-Newton Thruster. DRS shall demonstrate a Colloid Micro-Newton Thruster in a space environment at any thrust level
 - Being a technology demonstration project, the majority of the challenge is to mature this technology to a point that it can be qualified for flight. **This will be 90% of the success for this project.** Due to the long storage and ATLO period of DRS, any in-flight operation of the thrusters is considered a success, even if the system is not operating completely as intended
- ✓ 4. The project shall document and archive design, fabrication, test and flight demonstration data relevant to the qualification and infusion of DRS systems into future missions requiring DRS technology
- ✓ **Minimum Mission Success:** DRS shall deliver a flight qualified Colloid Micro-Newton Thruster, producing any measurable thrust on-orbit, verified through analysis of telemetry.

Open Issues, Lessons Learned from Pathfinder and Future Plans

- We experienced 3 issues with the colloid thruster on orbit:
 - Thruster 1 Bubbles – microvalve response reduced
 - Cluster 2 DCIU PROM – 1 of many routines in PROM damaged
 - Thruster 4 Propellant Bridge – ran at extreme conditions
- Through on-orbit experience, all issues were dealt with effectively and the mission continues even today!
- Key lessons learned:
 - Microvalve manufacturing and repeatability – already improved through 3 Phase II SBIRs and a NASA APD SAT to bring a fully redundant feed system to TRL 5
 - Thruster operations – new processor, memory and software update required
 - Thruster lifetime and reliability – new lifetime models, electrode designs, and long duration testing is required
- Future Plans:
 - NASA has created a L3 Study Office charged with developing technologies for a US contribution to an ESA-led LISA mission, including microthrusters
 - Over the next 5 years, a flagship-class colloid thruster system will be brought to TRL 6 including starting a 6-yr long-duration life test



National Aeronautics and
Space Administration


Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

FUTURE NASA APPLICATIONS



Spacecraft and Propulsion Requirements and Capabilities

Micropropulsion Mission and Technology Space

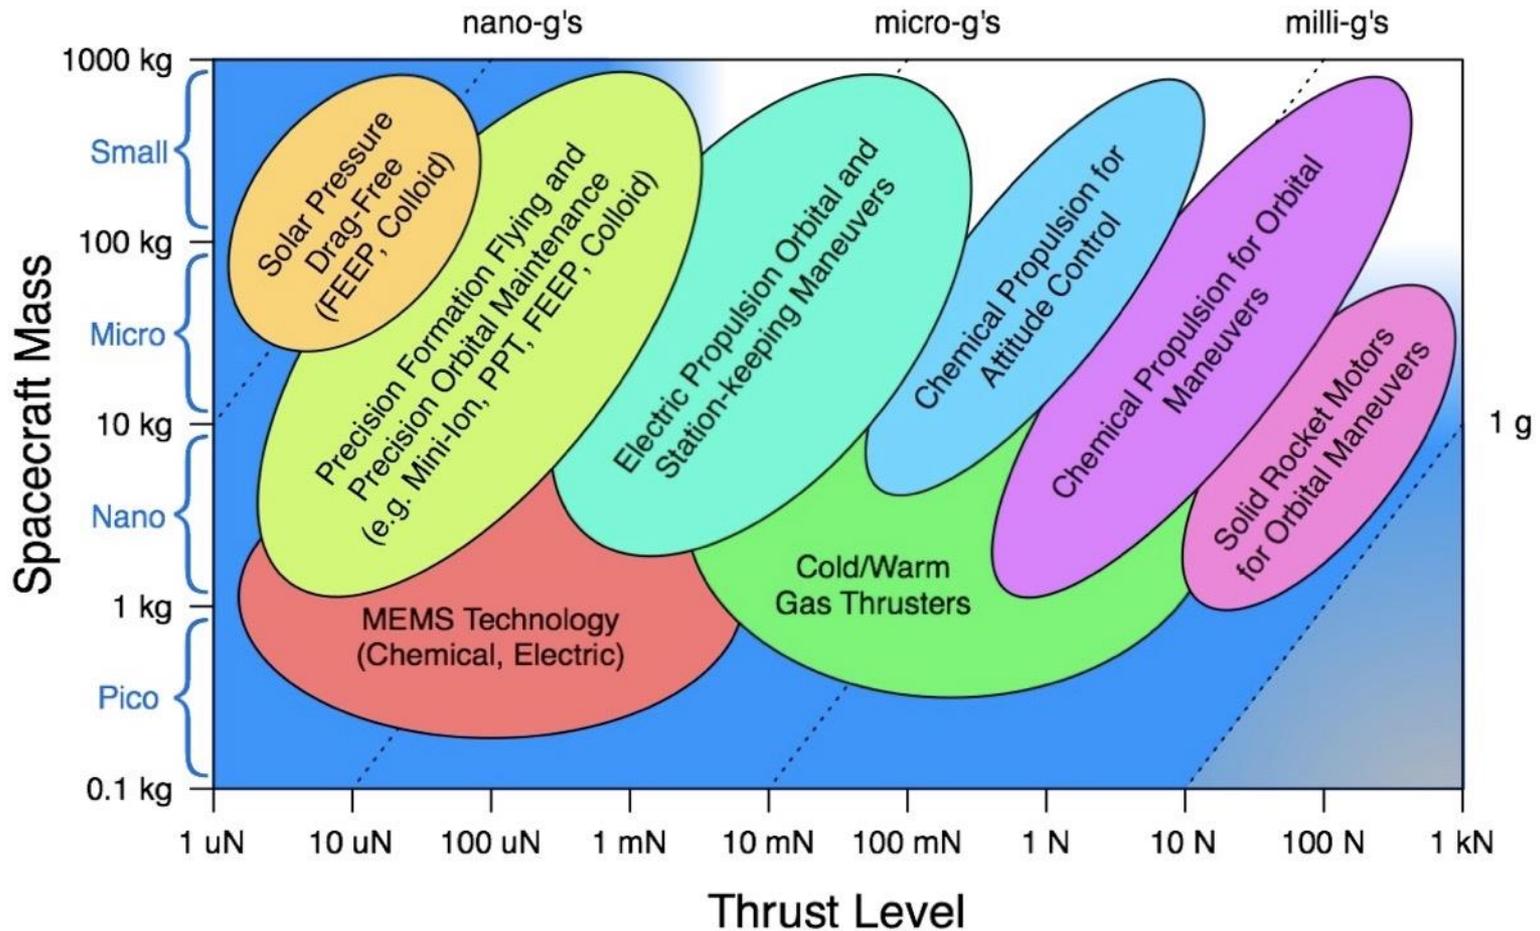




National Aeronautics and
Space Administration

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

Flight Qualified Electric Propulsion Systems

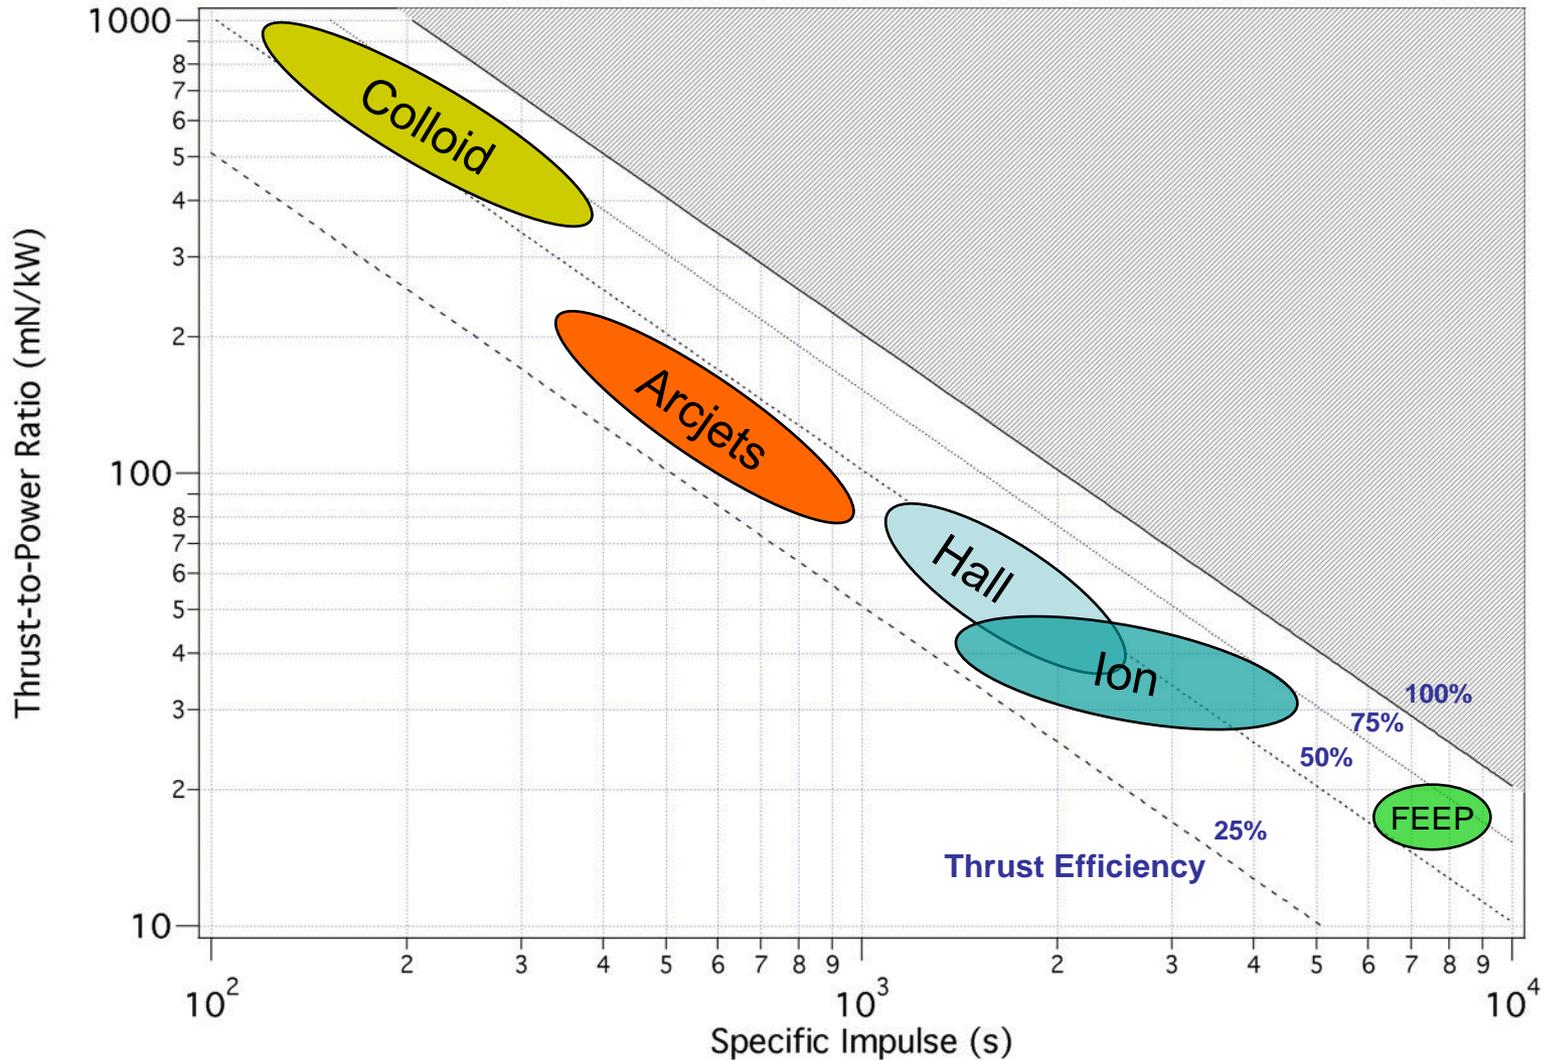



Three New NASA Mission Scenarios

I. Drag-free constellation maintenance

- Gravity wave observatory
 - Laser Interferometer Space Antenna (LISA)
- Derived thrust profiles for multiple mission modes and functions

II. Drag-free precision orbit maintenance


- Earth observing radar satellite with repeat tracks
 - Interferometric Synthetic Aperture Radar (InSAR)
- Derived thrust requirements for 30 m Earth-fixed orbital tube

III. Precision pointing



- Exoplanet observatory
 - ACCESS
- Derived precision pointing accuracy capability with electric thruster characteristics



Laser Interferometer Space Antenna (LISA)

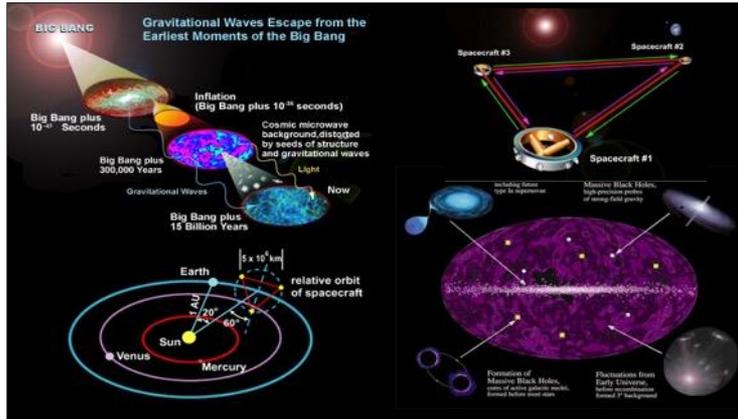


- Detects gravitational waves by measuring the time-varying strain in length between spacecraft
- **Orbit:** 3 independent, Heliocentric, 20° earth trailing orbits, equilateral triangular constellation with 5×10^6 km $\pm 1\%$ arm lengths, constellation requires no active station keeping or maintenance over the mission lifetime
- **3 spacecraft separated by 5 million km**
 - Distance between spacecraft must be maintained to within ~ 10 nm
 - Requires
 - 10's of μN level thrust
 - $0.1 \mu\text{N}$ thrust resolution
 - $< 0.1 \mu\text{N Hz}^{-1/2}$ thrust noise
- **Spacecraft must operate in "drag-free" environment**
 - Thrusters must counteract minute disturbances of solar wind, radiation, and photon pressure
- **Mass: 400 kg per sciencecraft**
- **Lifetime: >5 years**
- **Both colloid and cold gas thrusters have been demonstrated on LISA Pathfinder/ST7 and one of them will be selected for LISA**

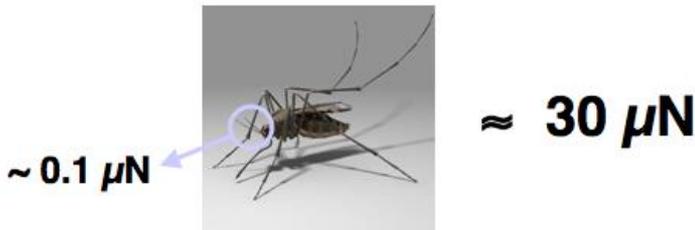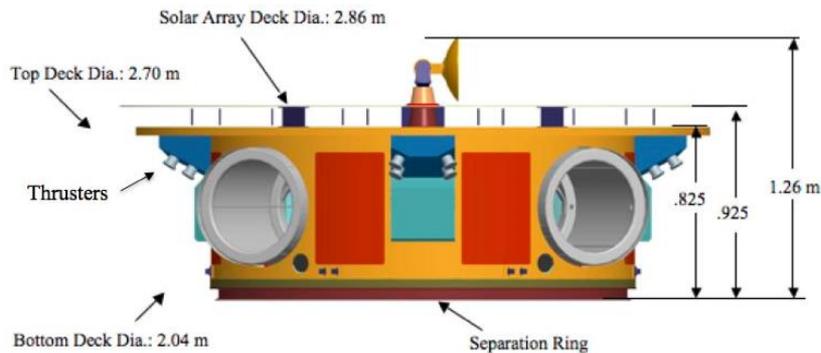



Earth observation spacecraft

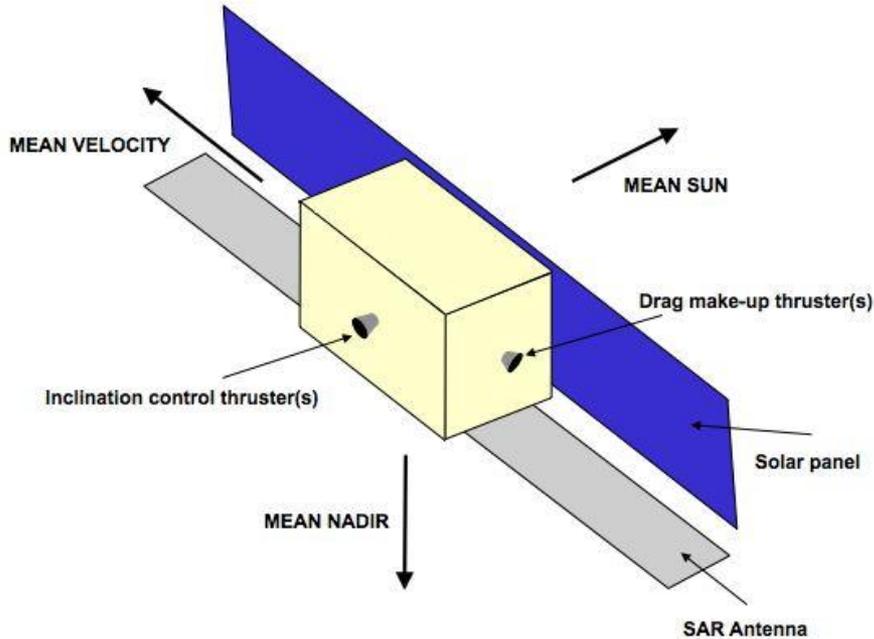

InSAR spacecraft model

- **1000 kg “quiet” spacecraft:**
 - Attitude control performed with reaction control wheels and magnetorods.
 - No moving appendages, fixed SAR antenna and fixed solar panel.
 - Passive thermal control.
 - Small frontal area: $\sim 4 \text{ m}^2$
 - Lateral area: $\sim 20 \text{ m}^2$
 - Thrusters aligned with the center of mass for minimum impact maneuvers:
 - Anti-velocity direction to perform drag compensation.
 - Normal (anti-sun) direction to perform inclination maintenance.
- **Mission Applications**
 - Repeat track “orbit tubes”
 - Improve detection of moving objects
 - Earth monitoring: ice and water boundaries



Thrust Requirements for 30 m Earth-fixed Orbital Tube Maintenance

Orbit cycle		9	9	1	1
Orbits per cycle		134	134	15	16
Inclination		97.79	97.79	97.655	96.58
Altitude range (Km)		600-628	600-628	565-594	273-302
10.7 cm solar flux level (sfu)		175	250	175	175
Tangential acceleration required for instantaneous drag control (km/s²)		5.6x10⁻¹¹	2.8x10⁻¹⁰	8.5x10⁻¹¹	7x10⁻⁹
Tangential thrust required for instantaneous drag control (mN)					
Spacecraft Mass	400 kg	0.022	0.112	0.034	2.8
	1000 kg	0.056	0.280	0.085	7.0
	4000 kg	0.220	1.120	0.340	28.0
Normal acceleration for annual + bi-weekly inclination control with thrusters in both (sun and anti-sun) directions (mN)	2.4x10⁻¹⁰ Km/s²				
Normal thrust for annual + bi-weekly inclination control with thrusters in both (sun and anti-sun) directions (mN)					
Spacecraft Mass	400 kg	0.096			
	1000 kg	0.240			
	4000 kg	0.960			




Precision Orbit Maintenance and Transfer Analyses Summary

- **An acceleration level of 2.4×10^{-10} km/s² (normal) and 2.8×10^{-10} km/s² (tangential) will be required for practical use of low-thrust for orbit control and reduction of the control tube diameter to 30 m at the 600 km orbit altitude.**
 - 2 normal and 1 tangential 0.3 mN thrusters for a 1000 Kg spacecraft
- **The 1/16 orbit at 300 km will require thrust levels of 7×10^{-9} km/s², mostly for drag compensation.**
 - 2 normal 3.0 mN and 1 tangential 7.0 mN thrusters for a 1000 Kg spacecraft
- **Orbit change to a shorter repeat cycle will require hundreds of days at the thrust level needed for orbit control.**
 - **Could reduce to tens of days by using 10 thrusters or thruster with an order of magnitude higher thrust**
 - 100 mN thruster could accomplish transfer within ~ 40 days.



Spacecraft and Requirements

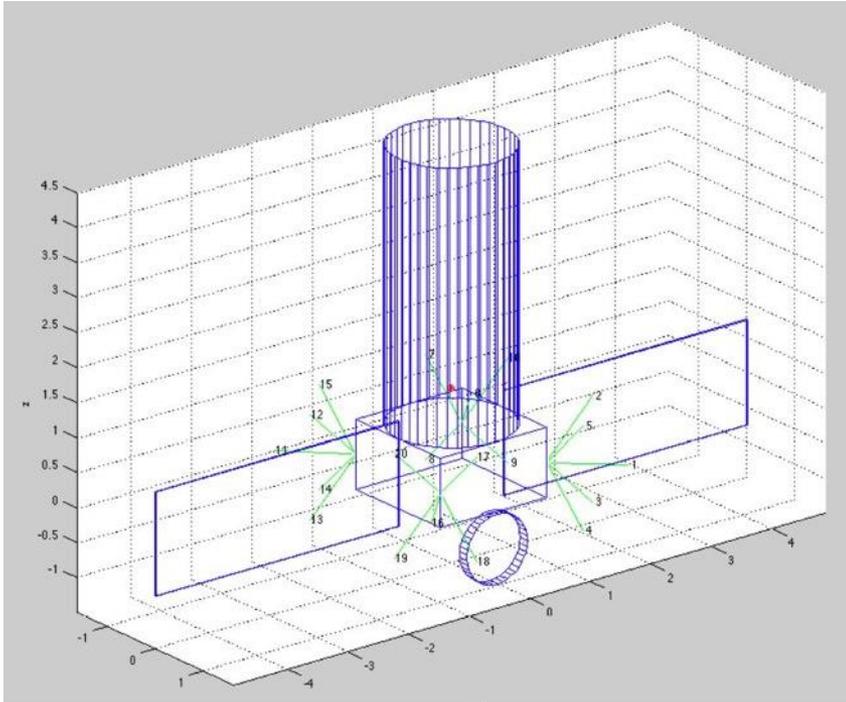

Configuration and thruster placement modeled.

- **ACCESS Exoplanet Observatory Mission Concept**
 - Monolithic chronograph
 - ~2000 kg
- **Pointing/attitude error requirement**
 - Tip/tilt, x/y axes: 0.1 milliarcseconds (mas)
 - 50 x better than state-of-the-art
 - Hubble requirement: 5 mas
 - Roll axis: 5000 mas
- **Desired slew rate**
 - ~1.7 deg./min.
- **Electric Propulsion ACS**
 - 20 microthrusters
 - 4 clusters with 5 thrusters in each



EP approach also has mass advantages

Mass comparison of traditional and electric propulsion-based ACS for ACCESS-class mission.

Subsystem	Mass (kg)	
	Traditional	EP
4 HR-16 Reaction wheels	48	0
Thrusters	4.0	10
Propellant	105.4	7.3
Tank	29	0.8
Additional battery	0	19.5
Additional Solar Panel	0	2
EP Thruster Power Processing Unit	0	25
Active Hexapod	175.5	0
Propulsion System Sub-total	361.9	64.6
Dry subsystem mass without ACS and Hexapod	1798.1	1798.1
Wet mass	2160	1862.7
Total Propulsive “fuel Fraction” (%)	17	3
Mass Savings over Traditional (%)		14

- **Mass savings of ~14 % with electric propulsion ACS**
 - Without reaction wheels, hydrazine thrusters and associated vibration isolation hexapod
- **If higher slew rates or station-keeping maneuvers are required, keeping the hydrazine system still has a next mass savings**



Precision Pointing Analysis Summary

- **The most stringent fine-pointing requirement of < 0.1 milliarcseconds can be met with electric-thruster attitude control.**
 - A factor of 50 better than current SOA Hubble-class pointing
- **A thruster with the simulated characteristics will allow:**
 - The medium-level of actuation to be eliminated
 - Both reaction wheels and a hydrazine thruster system for momentum management to be eliminated, and
 - The active optics to be greatly simplified since the telescope can be pointed close to the fine-level requirement.
- **Vibrations are expected to be less than 4 nm displacements with thrust profile approach.**
- **EP ACS mass is expected to be $>10\%$ less than standard approach.**
- **Higher-fidelity attitude control simulation is needed to fully explore the optimal requirements for an electric thruster-based attitude control system and characterize on-times and fuel consumption.**




Mission Scenario Micro-Newton Thrust Analysis Summary




- **4 – 30 μN with 0.1 μN thrust precision and 0.1 $\text{mN}/\sqrt{\text{Hz}}$ thrust noise is enabling for a drag-free LISA constellation with 400 kg spacecraft.**
 - BUSEK colloid thruster has been flight qualified and delivered for ST7 mission with this performance capability.
- **10's-100's, and up to 1000s μN for orbit transfer with 1 – 10 μN thrust precision is enabling for 30 m Earth-fixed orbital tube maintenance.**
 - Qsinetiq T5 thruster is providing 1-20 mN with 1-12 μN resolution for atmospheric drag makeup on the ESA GOCE mission (250 km altitude).
 - Smaller ion engines and electropray thrusters are under development for the lower thrust level range capability.
- **Micronewton thrust capability is enabling for exoplanet observatories requiring <1 miliarcsecond attitude accuracy.**
 - Small ion engines are under development for this capability.
 - Electropray thrusters have demonstrated this capability.



Future of Electrospray Thrusters



- Measured performance in droplet mode at room temp. (~90% eff.):
 - 0.1 - 0.5 μA per emitter
 - 0.25 - 2.75 μN per emitter at 6 kV
 - Isp range of 450 - 200 s at 6 kV
- A 1 mN thruster would require:
 - 4000 - 400 emitters
 - 2.4 - 1.2 W (thruster head only) at 6 kV
 - Isp range of 450 - 200 s at 6 kV
- Similar arguments can be made for FEEPs or colloids running in ionic mode at higher Isp (2000-8000s)
- Thrusters are under development at JPL, Busek, and MIT

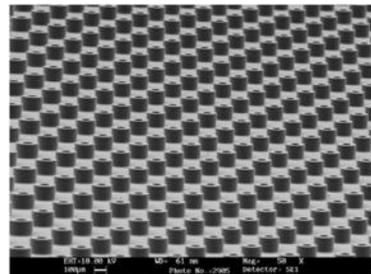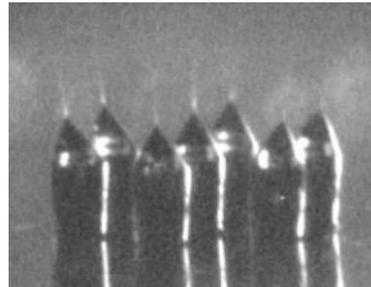

(MEMS Colloid Thruster Images from J. Stark, et al, J. Propulsion and Power, 22(3), 2006)




National Aeronautics and
Space Administration







Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

BACKUP SLIDES

Colloid Microthrusters for Precision S/C Control

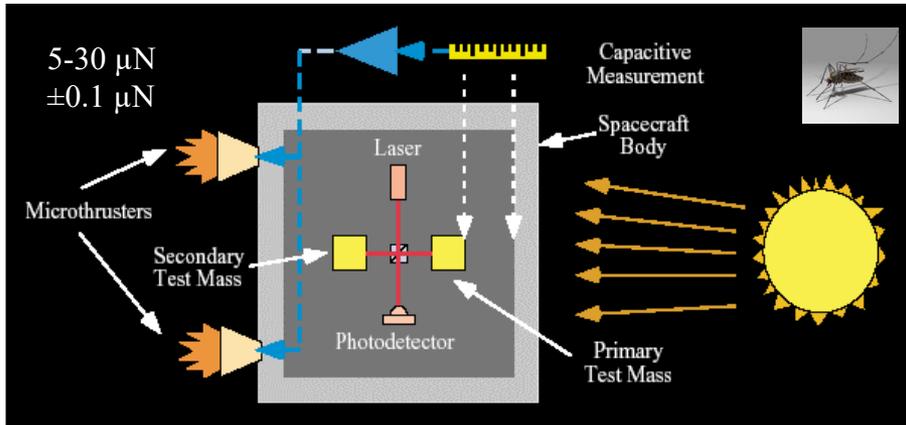

- Busek Colloid Microthrusters have been developed to TRL 7 by ST7-DRS on LISA Pathfinder and will continue to be developed for contribution to an ESA-led LISA mission
- Drag-free performance requirements ($\leq 10 \text{ nm}/\sqrt{\text{Hz}}$) and models demonstrated on orbit
- 0.1 mas (50x better than Hubble) pointing w/o reaction wheels is possible using less mass
- Focus for LISA is on demonstrating thruster reliability (redundancy) and lifetime (4 years)

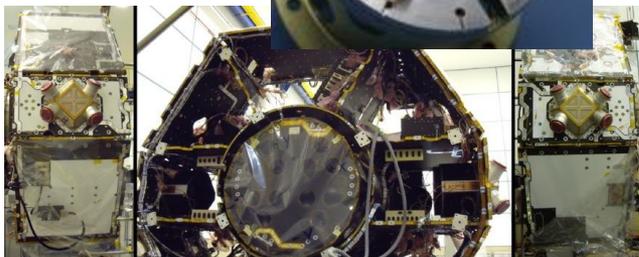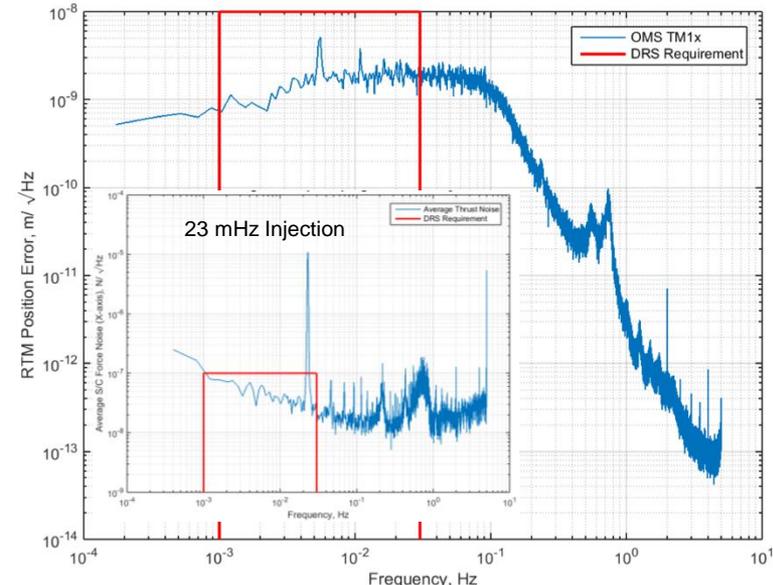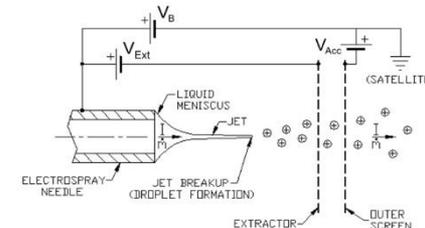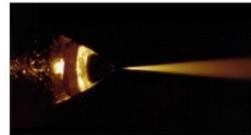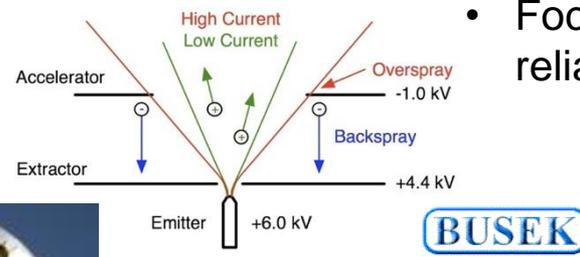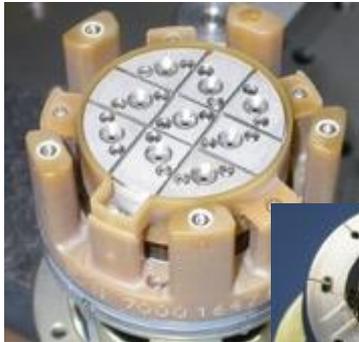




Thruster Technical Challenges



2003 Lab Model




2004 Prototype Model

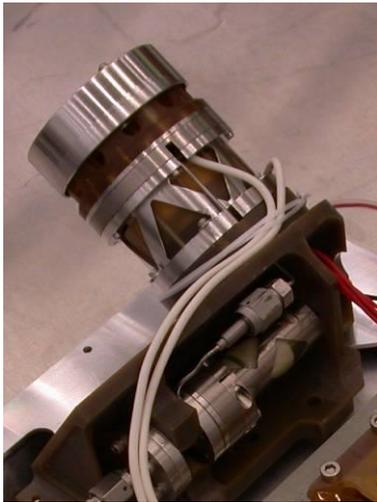

2005 First EM Design

- Complete System
- 9-Emitter Thruster Head
- Microvalve Flow Control
- EM Electronics

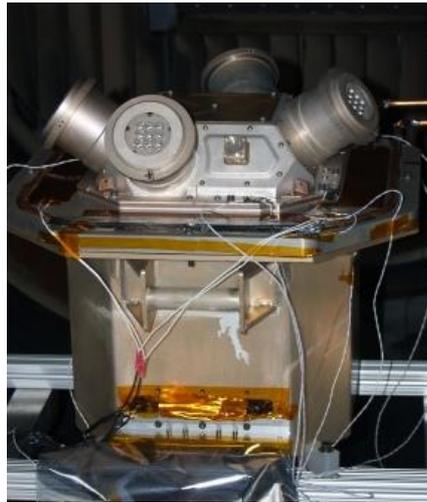

2007 Flight Design

- 4 Thruster Systems in a Cluster
- 3400 hr Life Test Complete
- Thrust Stand Measurements and Environmental Testing Complete
- Flight-Hardware Delivered

- Colloid Thruster Development Timeline:
 - Busek and JPL began work on Colloid Thrusters in 1998 with a NASA Phase I SBIR
 - ST7 work began in late 2002 with a 6-emitter Prototype Model completed in 2004 along first direct thrust stand measurements at Busek by PDR
 - First 9-emitter EM model failed after 500 hours of testing in late 2005; JPL became much more involved with an engineer on site at Busek
- Technical Challenges:
 - Excess propellant (overspray) and thruster lifetime
 - Bubbles in the feed system and thruster performance
 - Emitter design and fabrication
 - Microvalve thermal design and fabrication
 - Material compatibility with propellant


Scales in a Precision Colloid Thruster

- Thrust (30 μN max with 0.1 μN precision):
 - 30 μN is about the weight of a mosquito
 - 0.1 μN is about the weight of a mosquito antenna
- Beam Current and Flow Rate:
 - 10 nA precision at 10 kV (Terra-Ohm isolation)
 - 10 nL/s maximum flow rate (1 drop in 10 min)
 - Microvalve flow rate precision requirement: 25 pL/s



Early Busek Colloid Thruster Development

- 1998: The use of colloid thrusters for micropropulsion applications is proposed. NASA awards a Phase I SBIR contract to Busek.
- 1999: Successful completion of NASA Phase I results in a Phase II award. Experimental tools for the investigation of colloid thrusters, including a torsional micro-Newton balance, are developed.[†] Extensive study of different propellants and electrospray properties. ‡,¥,□
- 2001: JPL awards a contract to develop a colloid thruster prototype for the DRS project. The prototype is delivered, with an estimated Technology Readiness Level of 4[€].
- 2002: The DRS project is selected for NMP's ST7 mission. Busek is the DRS team member responsible for the Micro-Newton Thruster development.

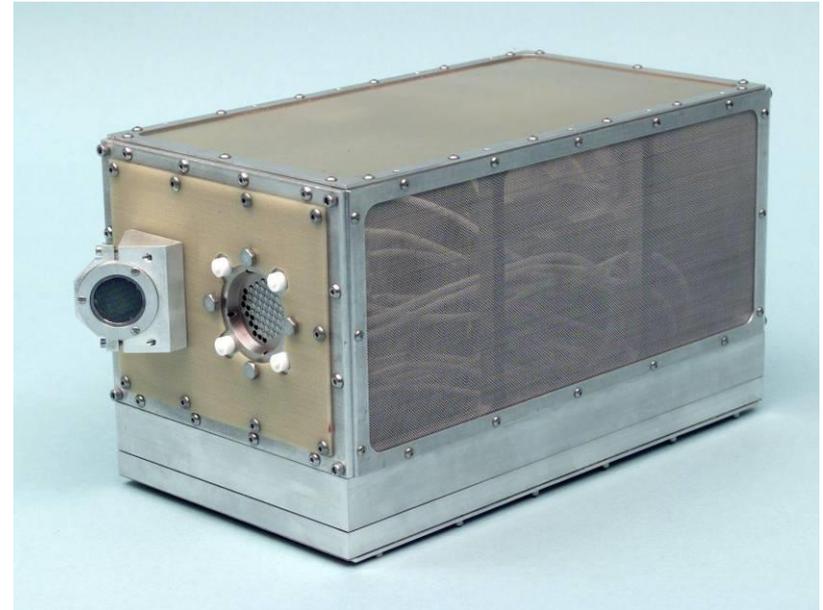

Busek Colloid Microthruster Prototype (2001)

- 56 needles, 1 propellant feed system
- Separate extractor and accelerator grids
- Integrated DC-DC HV converters and DCIU
- Carbon nanotube neutralizer
- I_{sp} : > 500 s; Thrust: 1-20 μ N
- Total mass: 2 kg; Total power: 6 W

[†] M. Gamero-Castaño et al. Paper IEPC-01-235, 2001

[‡] M. Gamero-Castaño & V. Hruby. J. Prop. Power, 17, 977, 2001


[¥] M. Gamero-Castaño & V. Hruby. J. Fluid Mech. 459, 245, 2002.

□ M. Gamero-Castaño. Phys. Rev. Lett, 2003.

[€] V. Hruby et al. Paper IEPC-01-281, 2001



Thruster Power Processing Unit Schematic

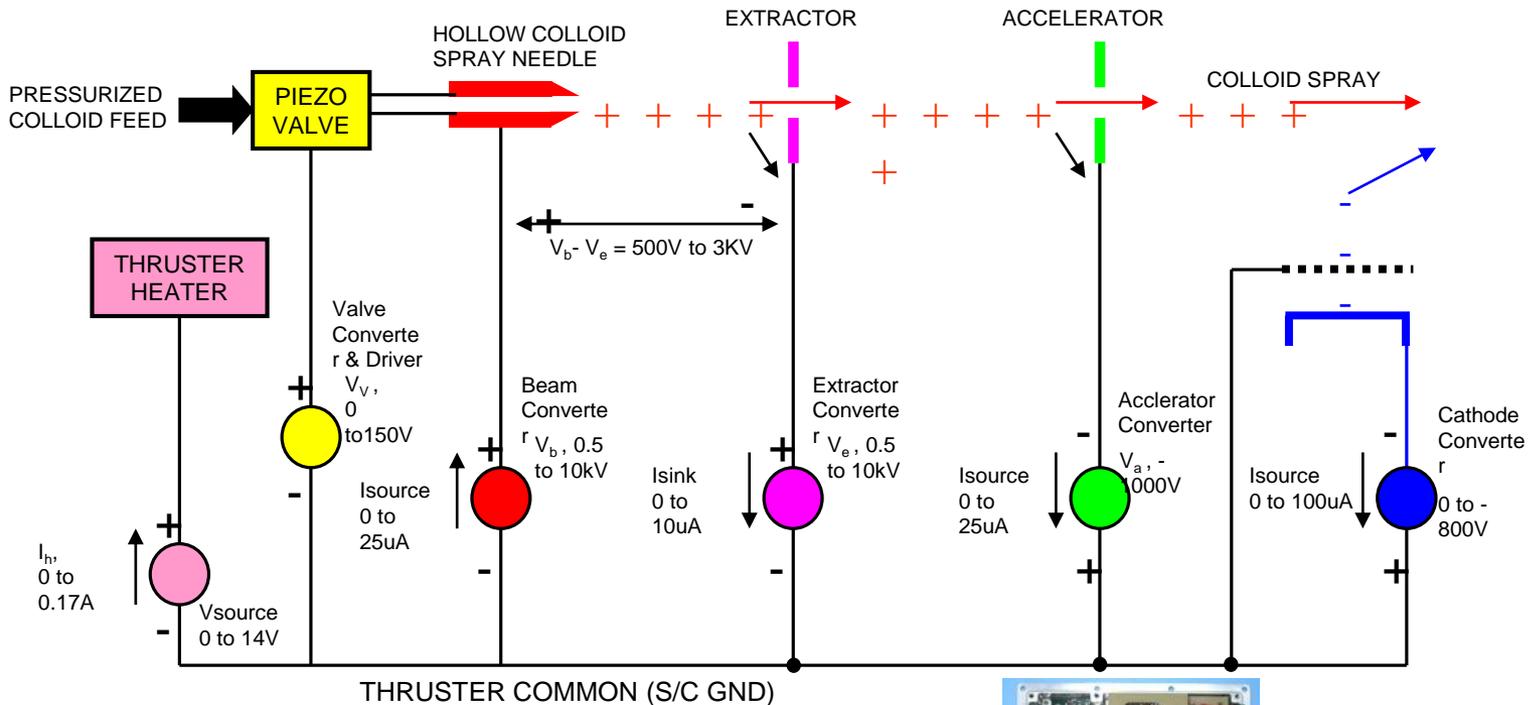



CONTROLLED VARIABLES: V_b , $(V_b - V_e)$, V_v , I_h , I_c

- PPU challenge is having two high voltage variable output DC-DC converters capable of providing 0.5 to 10 kV in a continuous range
- Flight hardware delivery in late 2006 by Assurance Technology Corporation (ATC)







Thruster Head and Micro-Valve Performance

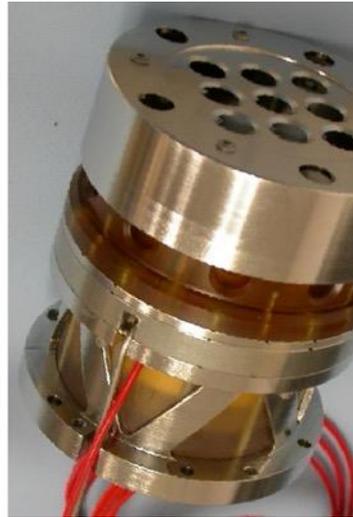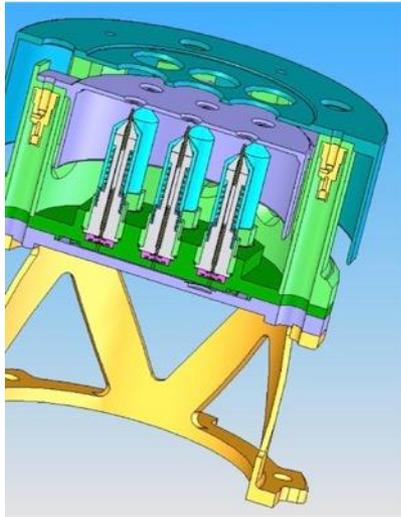

- Thruster head and microvalve meet LISA performance requirements:
 - 5-30 μN with $< 0.1 \mu\text{N}$ resolution
 - $< 0.1 \mu\text{N}/\sqrt{\text{Hz}}$ thrust noise

Micro-Valve Resolution

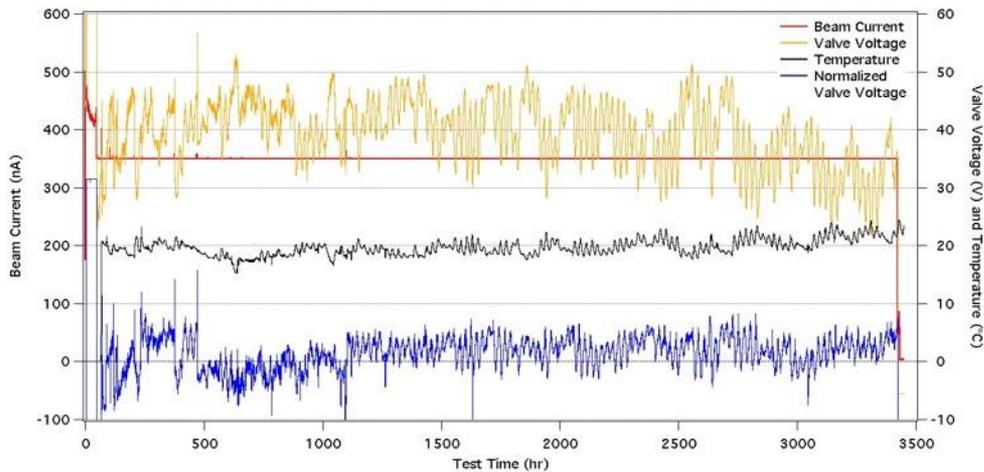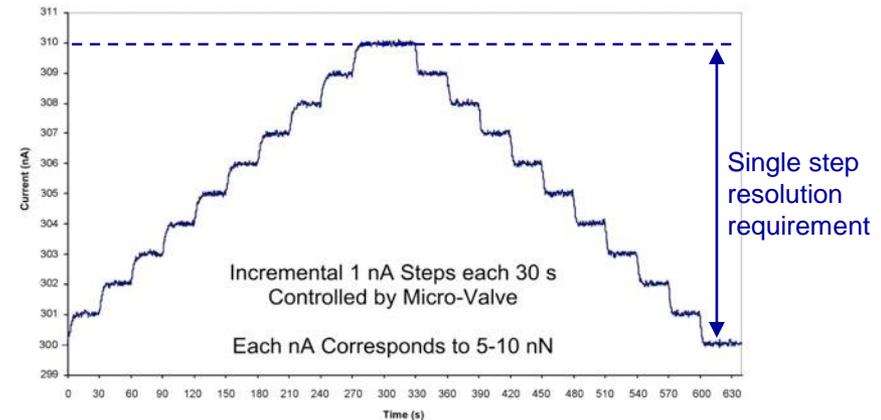



National Aeronautics and Space Administration




Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

Requirements V&V

All requirements have been verified

Requirement	Box Level	Cluster Level
Thrust Range	✓	Partial
Thrust Precision	✓	Partial
Thrust Noise	✓	Partial
Thrust Response Time	✓	Partial
Specific Impulse	✓	Partial
Operational Lifetime	✓	
Plume Half-Angle	✓	
Environmental Dynamics		✓
Environmental Temperature	✓	✓


- All L4 CMNT requirements have been verified
- Some requirements have been verified at the “box” level
 - A “box” is a complete flight-like single thruster system
 - A single thruster system is smaller, lighter and cheaper to test
 - Many of the performance requirements (thrust, lifetime, plume divergence) can be verified at the “box” level
- Both flight clusters went through protoflight-level dynamics and thermal qualification testing including full functional testing

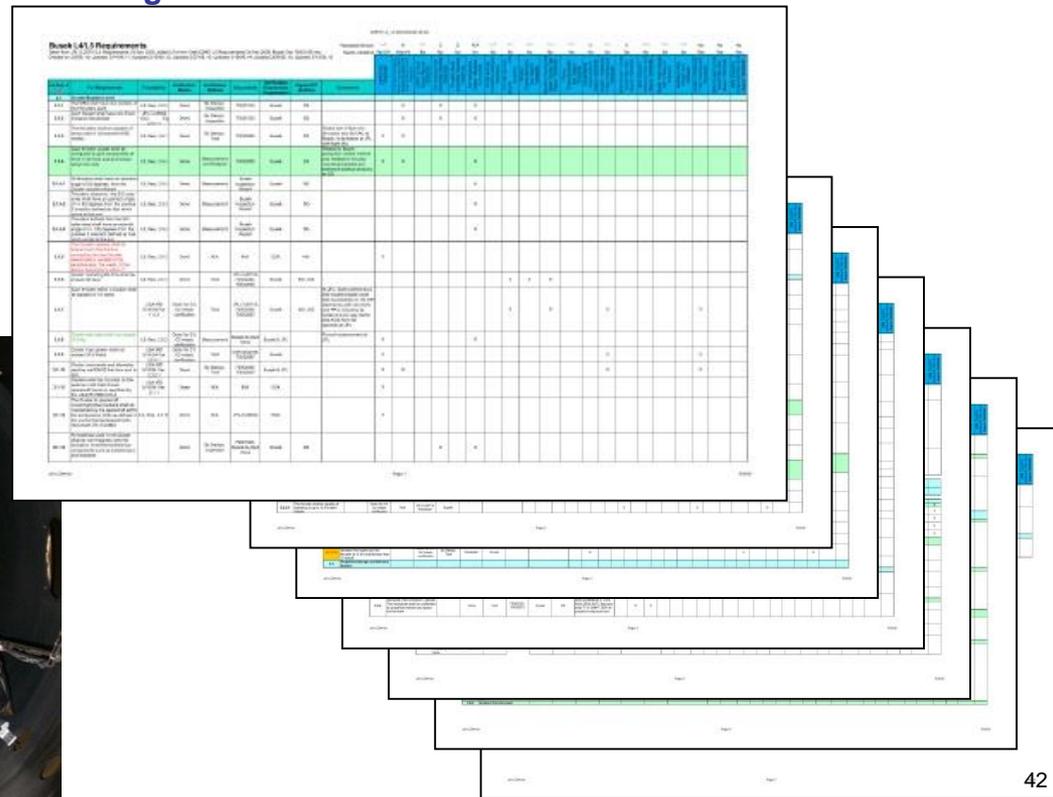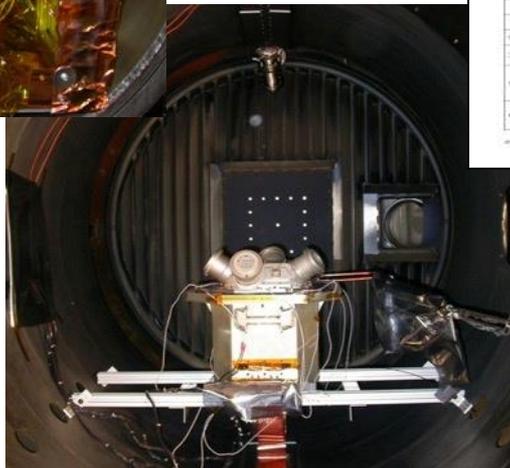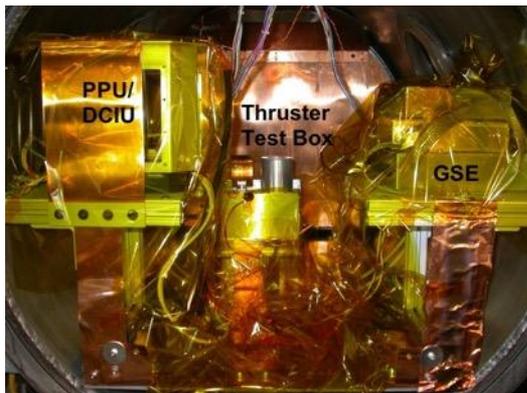






Performance of FLT 2B at EOT

Functional Test at the End of FLT 2B




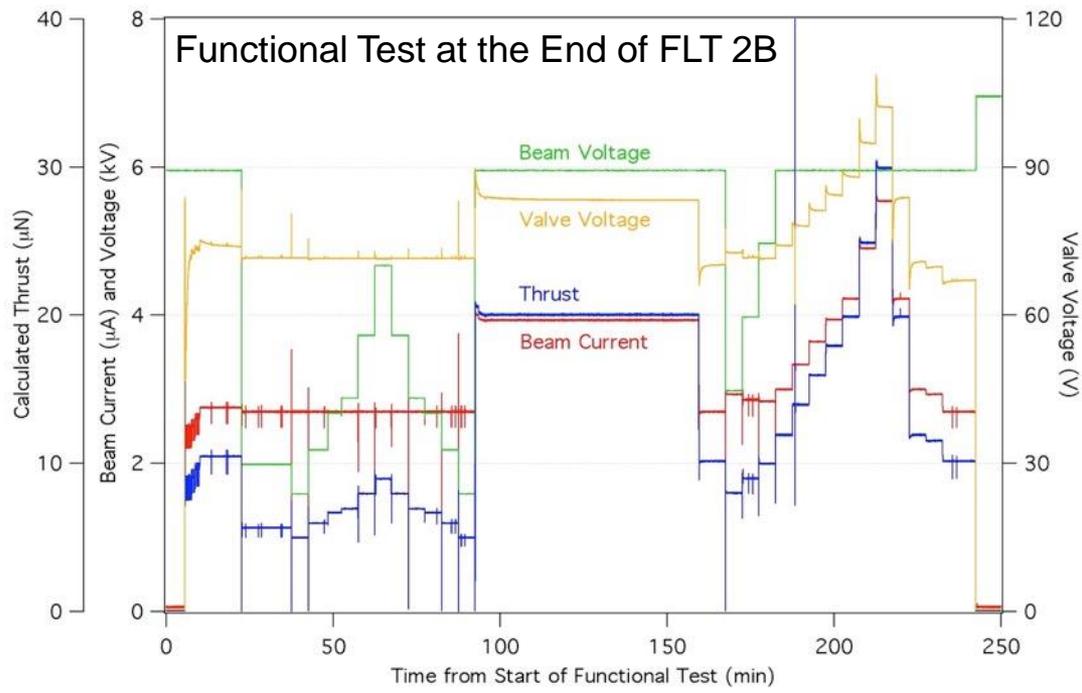


- At the end of Formal Life Test 2B, a full functional test was performed
- Full thrust range was demonstrated along with thrust noise $< 0.1 \mu\text{N}/\sqrt{\text{Hz}}$
- Both total impulse and propellant throughput exceed projections by $>50\%$

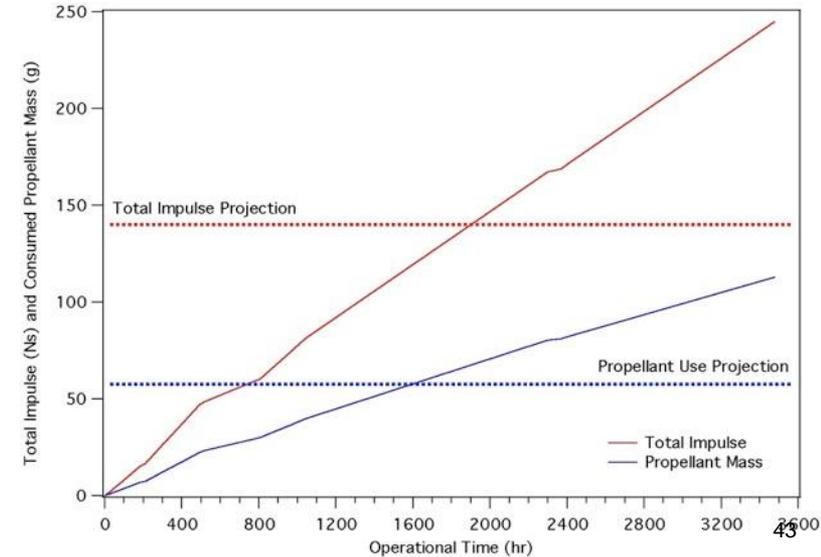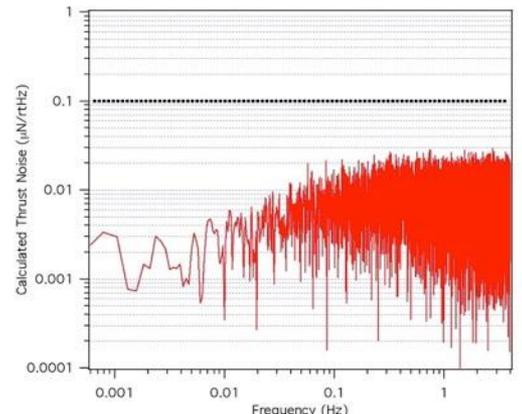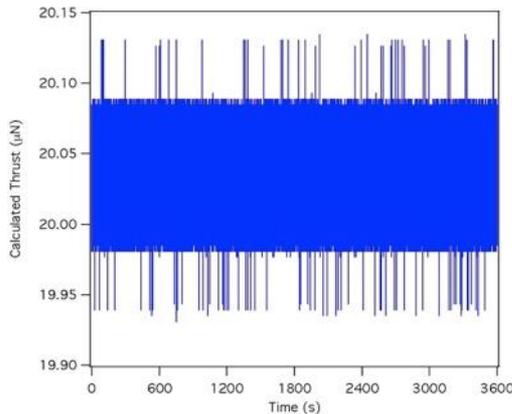






Exhaust Beam Profile and Stability

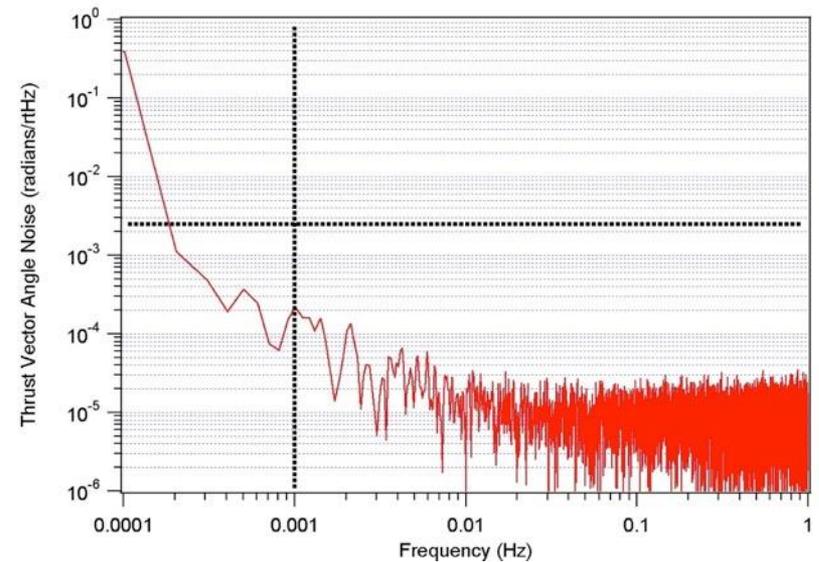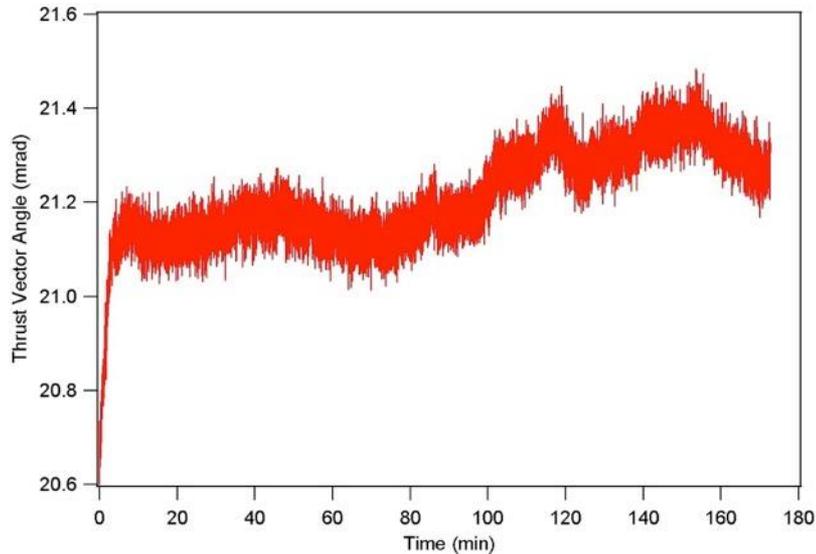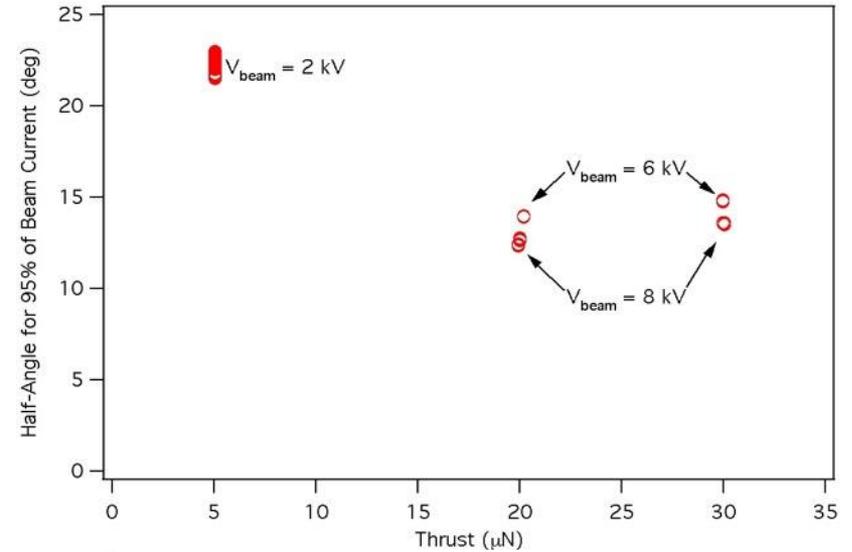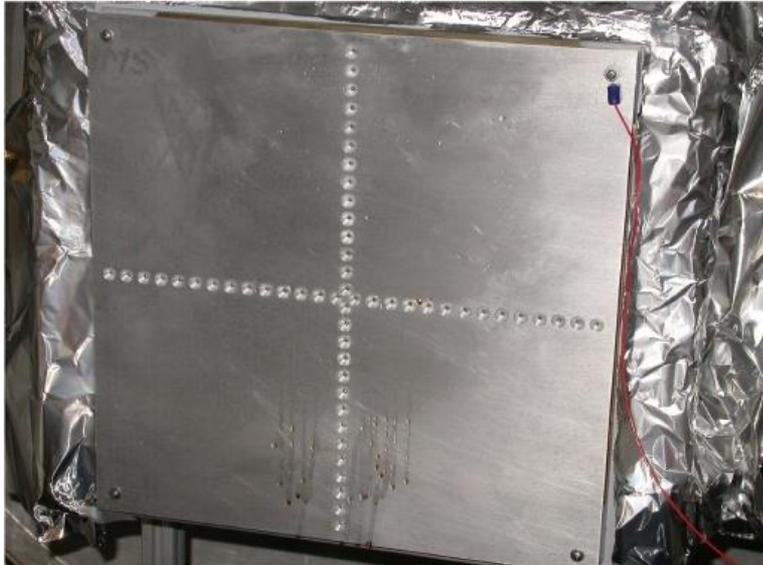



Dynamics Environmental Validation

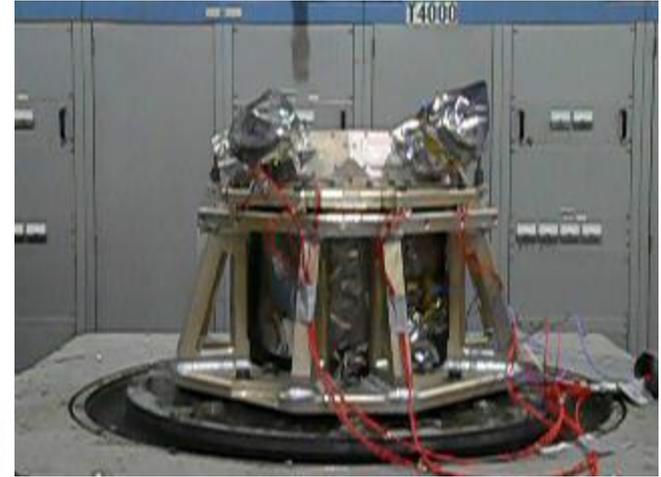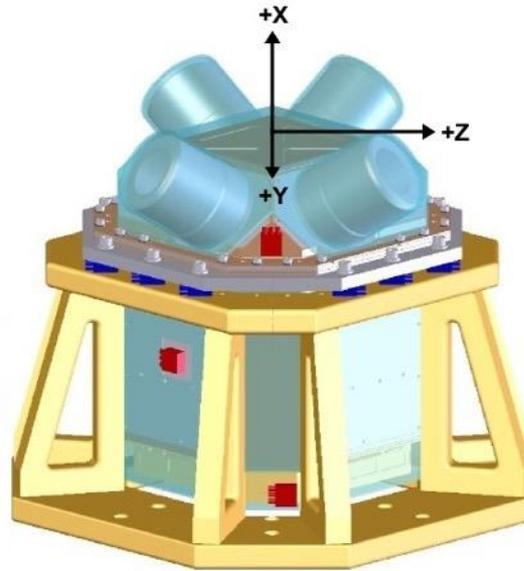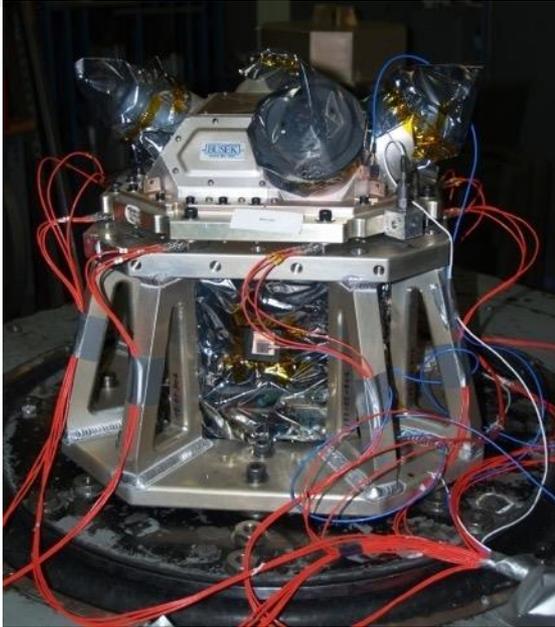


- **Dynamics testing performed at the cluster level, preceded by some component-level and mock-up (mass equivalent with critical components) shock testing**
- **Sine, random, and quasi-static load testing was performed on both flight clusters**
 - For sine load testing, Cluster 1 was tested to flight acceptance levels (16 g); Cluster 2 tested to protoflight levels (20 g)
 - All other testing was performed at protoflight levels for both clusters
- **Both clusters passed pre- and post- full functional testing**



Thermal Vacuum Test Profile

Both Clusters Completed TVAC Testing Successfully

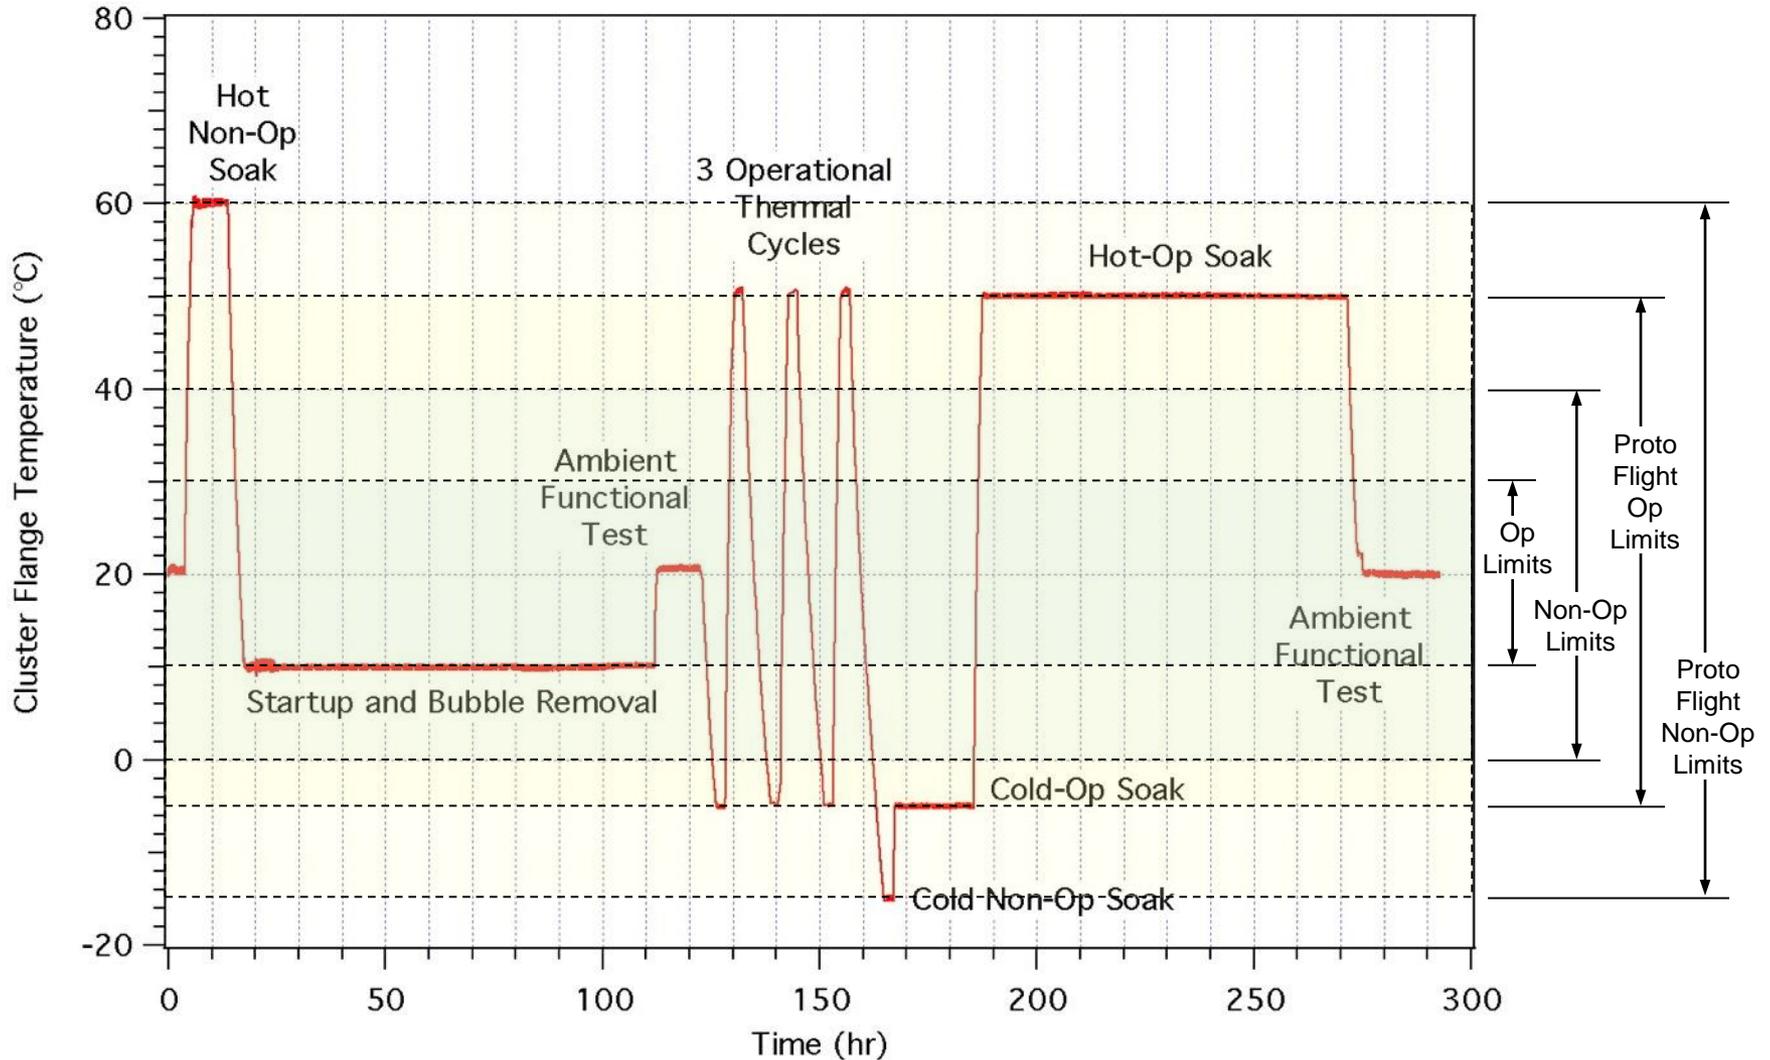



Flight Cluster Test Summary

All requirements have been verified

Test	Levels/Requirements	Results	
Card Level Random Vibe	Lateral = 10.6 g, Longitudinal = 12.3 g	✓	All Cluster 1&2 electronics units passed
Card Level TVAC	2 cycles, -15° C to 65° C	✓	All Cluster 1&2 electronics units passed
Valve Level Thermal Cycle	-5° C to 50° C operating, -15° C to 70° C non-operating	✓	8 out of 8 flight microvalves passed
Cluster Functional	Full-Scale Response Time < 100 s, Thrust Range 5 to 30 μN	✓	Cluster 1&2 (all thrusters): Response Time < 10 s, Thrust Range = 4.35 to 35.8 μN
Cluster Sine Vibe	20 g PF, 16 g FA	✓	Cluster 1 completed FA level, no sine retest Cluster 2 completed PF level, no sine retest
Cluster Random Vibe	Lateral = 10.6 g PF, 8.48 FA Longitudinal = 12.3 g PF, 9.9 g FA	✓	Cluster 1 completed PF level and FA retest Cluster 2 completed PF level and FA retest
Cluster TVAC	-5° C to 50° C operating (4 cycles), -15° C to 60° C non-operating,	✓	Cluster 1 passed post TVAC full functional test after low temperature start up anomaly Cluster 2 passed post TVAC full functional test with no anomalies
Cluster EMC	B < 4 μT, E < 20 V/m	✓	Cluster 1&2 Completed measurements at JPL



National Aeronautics and
Space Administration

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California


Both Flight Clusters Delivered to JPL



- Cluster 1 complete and delivered to JPL in February of 2008
- Cluster 2 complete and delivered to JPL in May of 2008



Cluster 1&2 at JPL I&T Lab

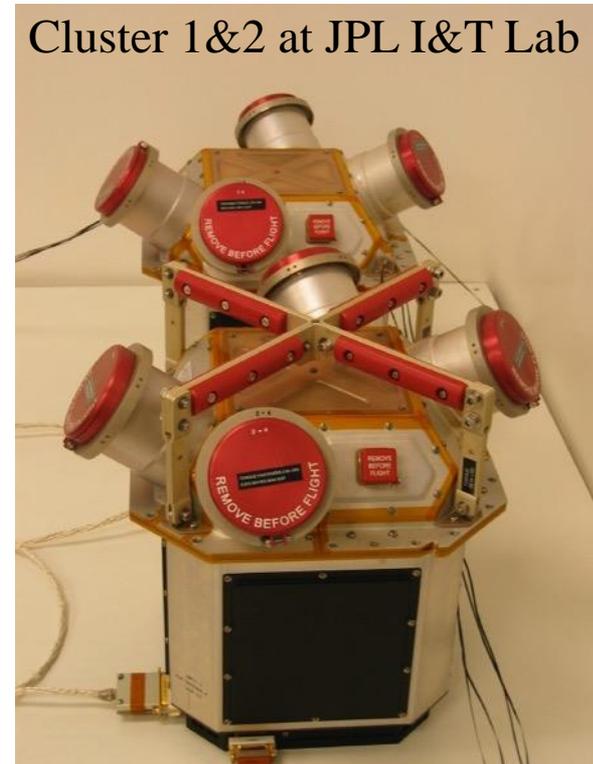



As Delivered Both Clusters Meet Mass, Power, Propellant, and Electronics Allocations

	Mass (kg)	Power (Watts)	Remaining Propellant Load (Operational Days)	Operational Time	Single Command Processing Speed (msec)	Memory Reserve
Allocation/Requirement	31 kg Total	53 Watts Max Total	90 days (T1/T2: 20 □N, T3/T4: 30 □N)	60 days (1440 hours)	100	ROM 32.8 kB RAM 33.0 kB
Cluster 1 Measured	14.794	16.5 Nom 24.6 Max (as tested; 23.8 Max w/reduced heater power)	T1: 137.6 T2: 129.3 T3: 97.1 T4: 93.1	Thrusters: ~100 hours Electronics: 700-800 hours <small>(3478 hours demonstrated in life test)</small>	~75	ROM: 18.6 kB (58%) RAM: 518 B (98%)
Cluster 2 Measured	14.784	17.1 Nom 25.4 Max (as tested; 24.6 Max w/reduced heater power)	T1: 108.5 T2: 99.1 T3: 98.4 T4: 96.1	Thrusters: 150-200 hours Electronics: 500-600 hours <small>(3478 hours demonstrated in life test)</small>	~75	ROM: 18.6 kB (58%) RAM: 518 B (98%)

Mass, Power, Data Processing Within Allocation




National Aeronautics and
Space Administration

Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

I&T Activities at JPL



Safe-to-Mate and IAU Integration

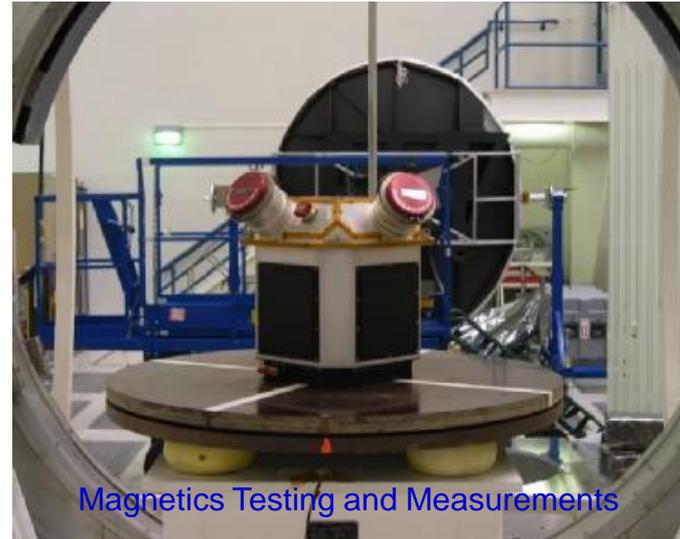

Magnetics Testing and Measurements



0.5 mm Resolution CG Measurement



EMI/EMC Testing and Measurements with IAU