2018 Conference on Advanced Power Systems for Deep Space Exploration

Sub-Surface RTG Systems and New Heat Sources

Dr. Terry J. Hendricks, P.E., ASME Fellow[1]

[1] Technical Group Supervisor, Thermal Energy Conversions Applications & Systems Group

Jet Propulsion Laboratory, California Institute of Technology

Pasadena, California, USA

Acknowledgements: Nataly Brandt, Juergen Mueller, Bill Nesmith, Knut Oxnevad

Jet Propulsion Laboratory
California Institute of Technology

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

AGENDA

- Proposed Future Deep Space Icy/Ocean Worlds Targets
- Current / Heritage Power Systems
- Design Investigations into Future Sub-Surface Ice Penetration, RTG Systems, and Heat Sources
  - Ice Penetration Challenges
  - Ice Penetration Solutions and Performance Characteristics
- Summary

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Where do we need to go?!

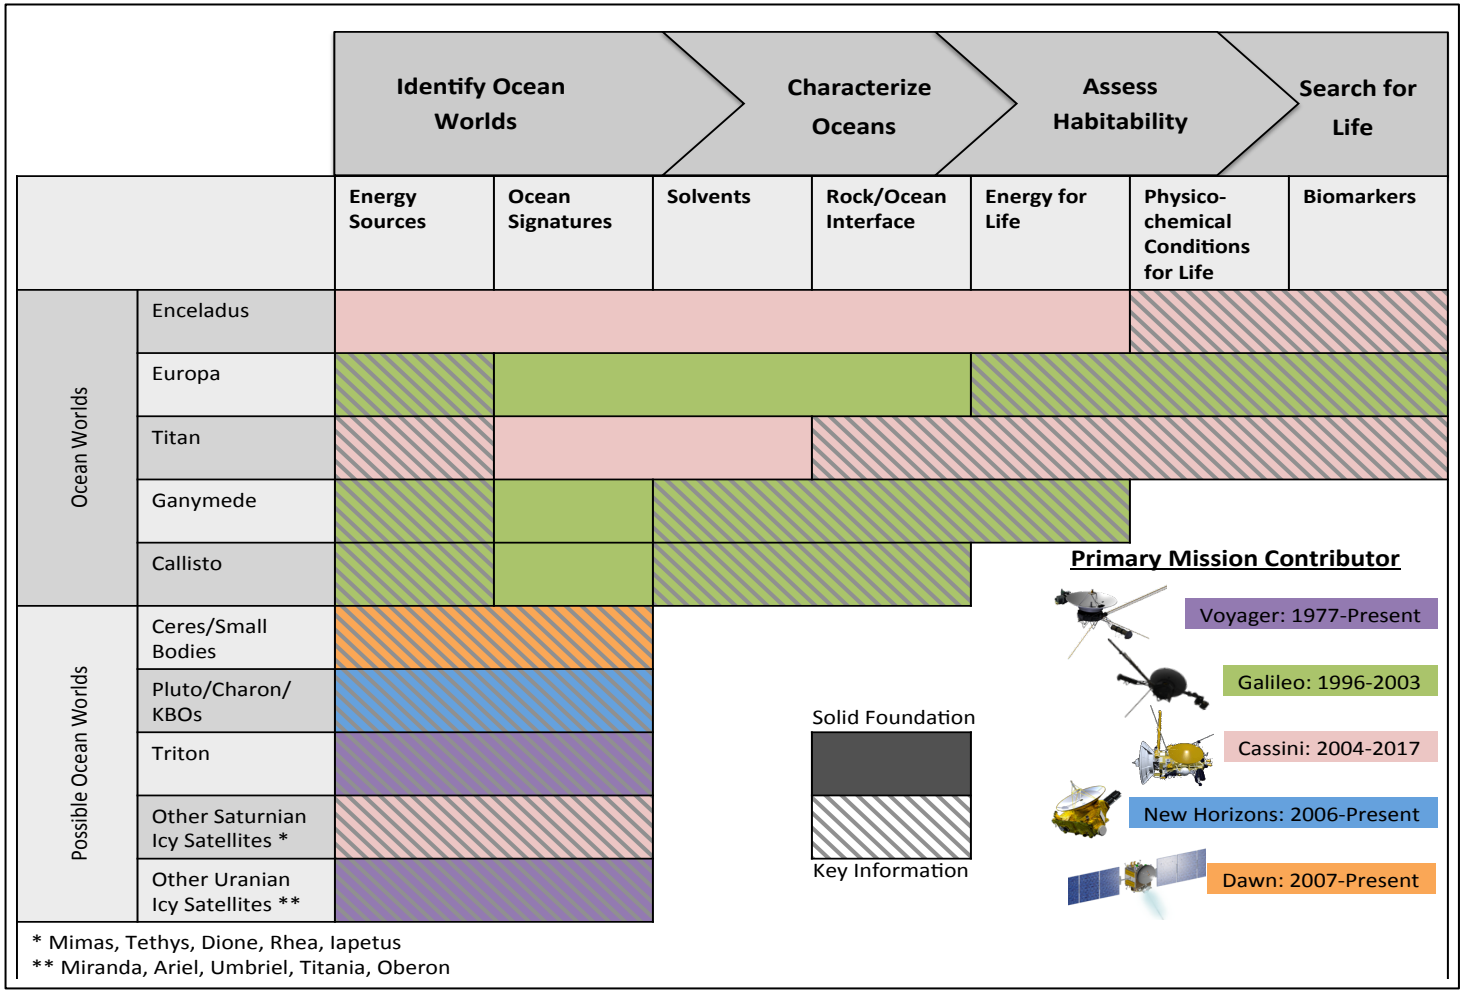

Spacecraft have been gathering data to define Ocean Worlds since 1977, starting with the Voyagers. Today we have solid information to define key Ocean World parameters for Enceladus (Cassini), Europa (Galileo), Titan (Cassini), and Ganymede and Callisto (both Galileo). Of these Enceladus, Europa, and Titan seem to stand out as the Ocean Worlds with most promise in the search for life elsewhere in the solar system.

Ref: Hendrix, A. and T. Hurford. February 2017. Roadmaps to Ocean Worlds: OPAG Update. Atlanta, GA.

Where do we need to go?!

Europa Internal Structure

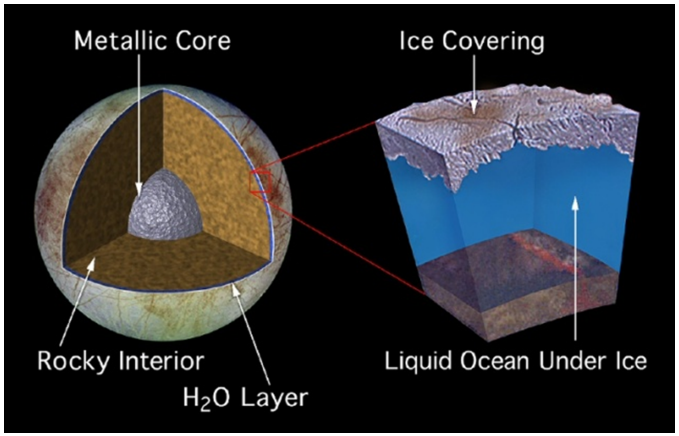

	Europa	Enceladus	Titan
			
Landed Mass (tons)	Atlas V: 1400; DeltaIVh: 2400; SLS: 4100 tons	Atlas V: 2750; DeltaIVh: 4800; SLS: 10500 tons	Atlas V: 2000; DeltaIVh: 3500; SLS: 8000 tons
Ice Thickness (km)	10-30 km	5-40	100
Ocean Depth (under ice) (km)	110	30	200
Radius (km)	1560	252	2575
Gravity (m/sec^2)	1.31	0.11	1.35
Planetary System	Jupiter	Saturn	Saturn

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Available Heat Sources and Power Levels for Current and Future Concept Radioisotope Thermoelectric Generators

MMRTG
Flight Qualified
(on MSL, baselined for Mars 2020)

eMMRTG
Technology Maturation
(~ 2024 target for system availability)

~ 120 to 160 W_e, 6.3% to 8% eff., 44 kg
~ 1880 W_{th} at 450 K T_{rej}

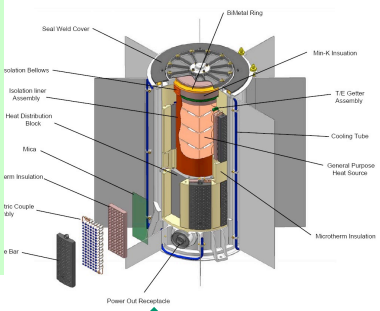

Segmented Modular RTGs Concepts
Technology Advancement
(~ 2029 target for system availability)



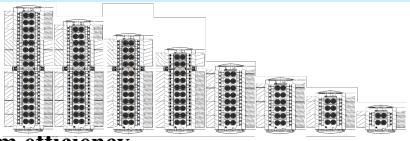

stem efficiency
design: (1 to 16 GPHS)
~ 23 to 460 W_e ; ~ up to 8.6 W/kg
~ 500 K T_{rej}

1-GPHS Small RTG Concept



~ 20 to 50 W_e, 6-10 kg
~ 230 to 150 W_{th} at 400-350 K T_{rej}

Existing Flight Qualified Heat Sources



GPHS (250 Wt)



RHU (1 Wt)

Application Power Levels



>100 Watts
- Under development – MMRTG & SRG
- >110 We & 35-40 kg per unit
- 2-8 GPHS per unit
- **Available by 2008-2009**



10 to 20 Watts
- Preliminary concept studies only
- 1 GPHS per unit
- Can use existing thermoelectric technology
- Requires systems engineering development



0.1 to < 10 Watts
- Some concept studies from early 1990's
- Fractional GPHS or assembly of RHUs
- Requires **redesigned thermal source aeroshell** and systems engineering development
- **More extensive development than options 1 or 3**

≥ 0.01 Watts
- Concept studies and technology development (Hi-Z)
- ≥1 RHU thermal source per unit
- Requires systems engineering development

mW-RTG RHU-Based Concepts - Limited Development

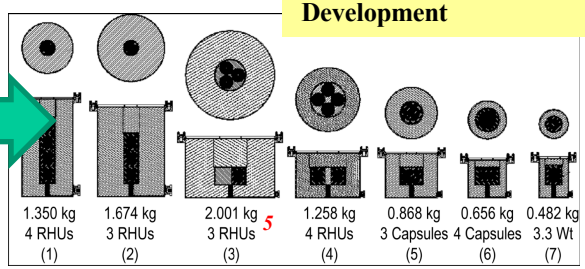

- 1.1 W_{th} per RHU
- 4% efficient for 500 to 300 K operation
- ~ 45 mW_e/RHU
- But could be 6-10% efficient between 300 and 100 K (Carnot!)

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

State-of-Practice: Heritage and Current RTGs

Heritage system not available anymore

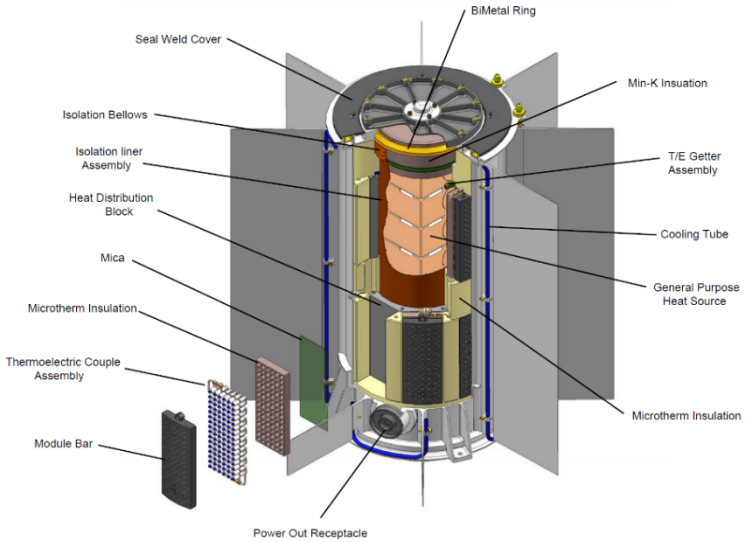

Current "off-the-shelf" Multi-Mission RTG

- GPHS-RTG (Galileo, Ulysses, Cassini, New Horizons)
  - **Vacuum-only operation**
  - TE materials: n-type and p-type Si-Ge alloys
  - Heat source: ~ 4500 Wth (18 GPHS)
  - Beginning of life (BOL) power: ~ 295 W_e
  - BOL specific power: ~ 5.1 W/kg
  - Annual power loss ~ 1.86% (exp. rate) - Cassini
- MMRTG (MSL, Mars 2020)
  - Developed to **"Multi-Mission" specifications**
  - TE materials: n-type PbTe and p-type TAGS/(Pb,Sn)Te
  - Heat source: ~ 2000 Wth (8 GPHS)
  - Beginning of life (BOL) power: ~ 122 W_e
  - BOL Specific power: ~ 2.8 W/kg
  - Annual power loss ~ 4.8% (exp. rate) - MSL

➢ ***Heritage/Current Systems use GPHS (Step 1 and Step 2) Designs for Thermal Sources***

➢ *Very Adequate for Current and Heritage GPHS-RTG and MMRTG Power Systems*

JPL Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Ice Penetration Velocity Profiles-Melting Only

- Early Scoping Projections
- Enormously complex thermal / fluid dynamic challenge
- Driven by ice environment and thermophysical/structural properties
- Governed by Available Thermal "Inventory" in CryoProbe

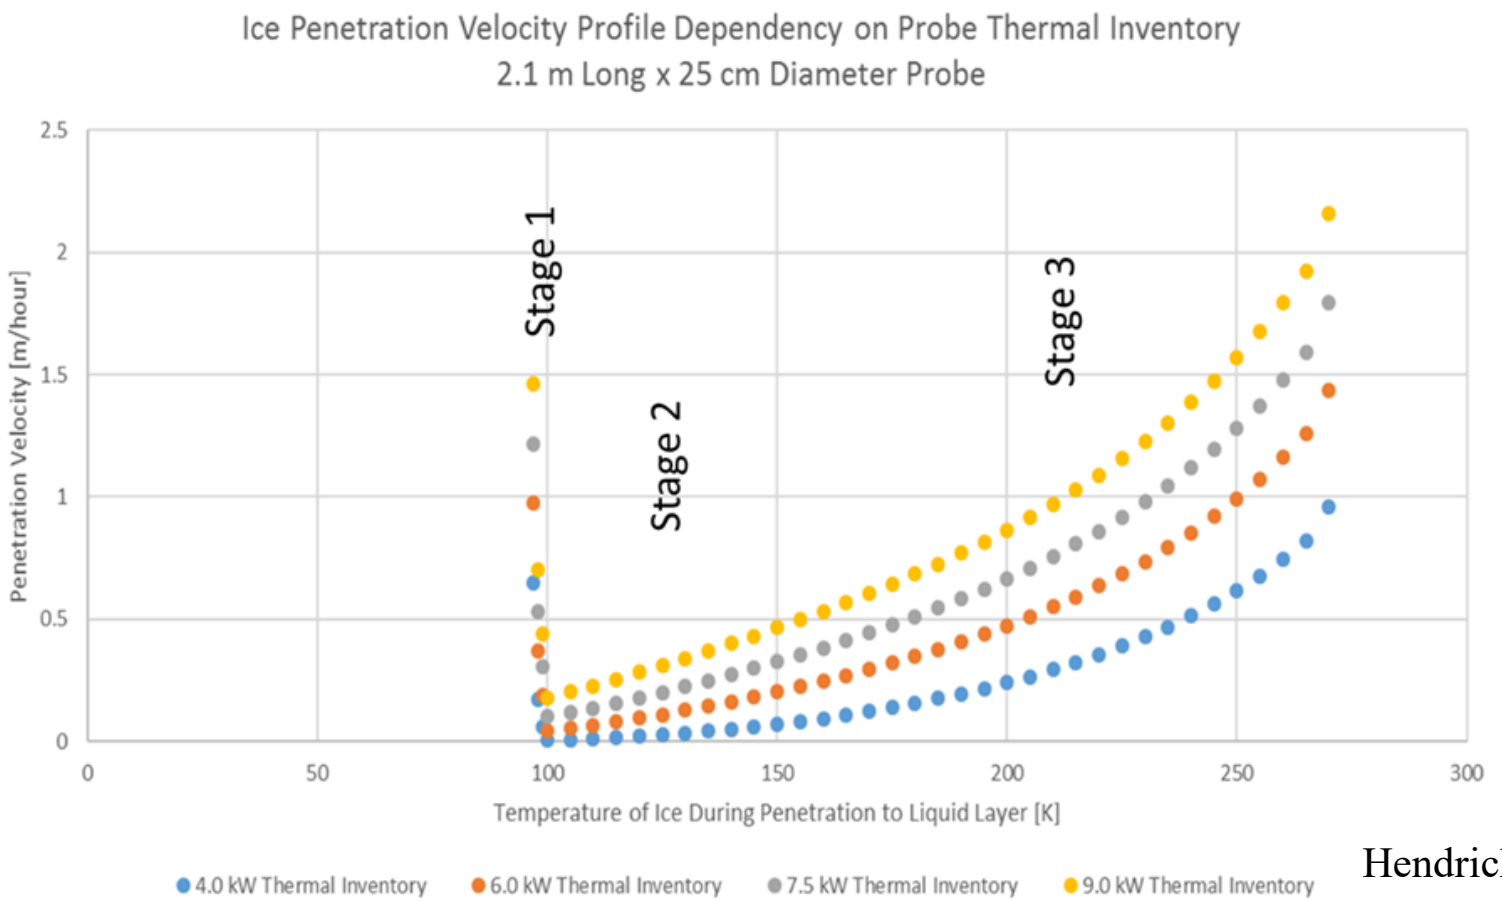

Hendricks, 2017

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Required Thermal Source Impact on CryoProbe Design

- Provides the complete picture on probe dimension impacts
- Shows what 16 GPHS system can do
- Severe mission time impact
- Latest detailed thermal models are showing ~10.5 kW is necessary @ 160 K
- Much higher than less-detailed models suggest

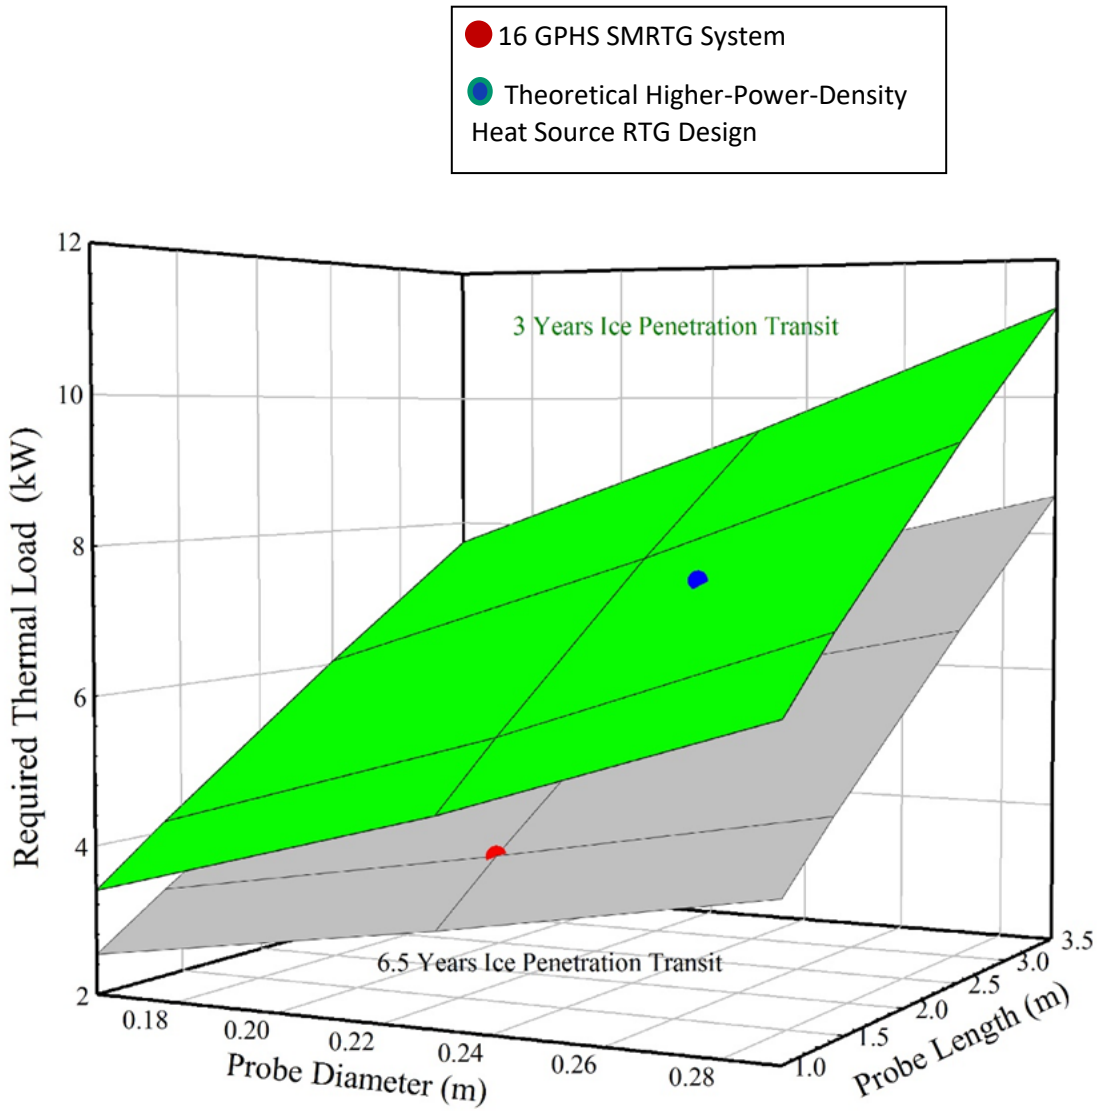

Hendricks, 2017

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

The need for Integrating RTGs with Pressure Vessels

- Pressure vessels are required due to very high pressures encountered in the ice sheets of Ocean Worlds and others in the table below.
- The waste heat of an RTG provides advantage to a melt probe; other technologies require the conversion of electricity back into waste heat to be distributed throughout a melt probe's surface and interior for housekeeping and melting.

	composition	g (m/s2)	h max (km)	fluid density (kg/m3)	P max (atm)	shell thick Al (cm)	shell mass Al (kg)
Earth	H2O	9.8	11	1000	1064	4.31	202
Ganymede	H2O	1.43	144	1000	2032	5.64	275
Callisto	H2O	1.24	150	1000	1836	5.40	261
Europa	H2O	1.31	30	1000	388	2.90	130
Mimas*	H2O	0.064	100	1000	63	1.49	64
Enceladus	H2O	0.133	40	1000	53	1.39	59
Titan - Lakes	C2H6	1.352	0.3	650	3	0.49	20
Titan - Subsurface Ocean	H2O	1.352	20	1000	267	2.52	111
Triton	H2O/NH3	0.779	200	1000	1538	5.02	240
Ceres*	H2O/NH3	0.28	?	?		0.00	0
Pluto	H2O/NH3	0.62	260	1000	1591	5.09	244

This is a preliminary analysis. The numbers will change with further study. The points are: the need for a pressure vessel and demand for waste heat are significant.

JPL Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

RTG-Powered Cryo-Hydro Autonomous Melt Probe System Concept

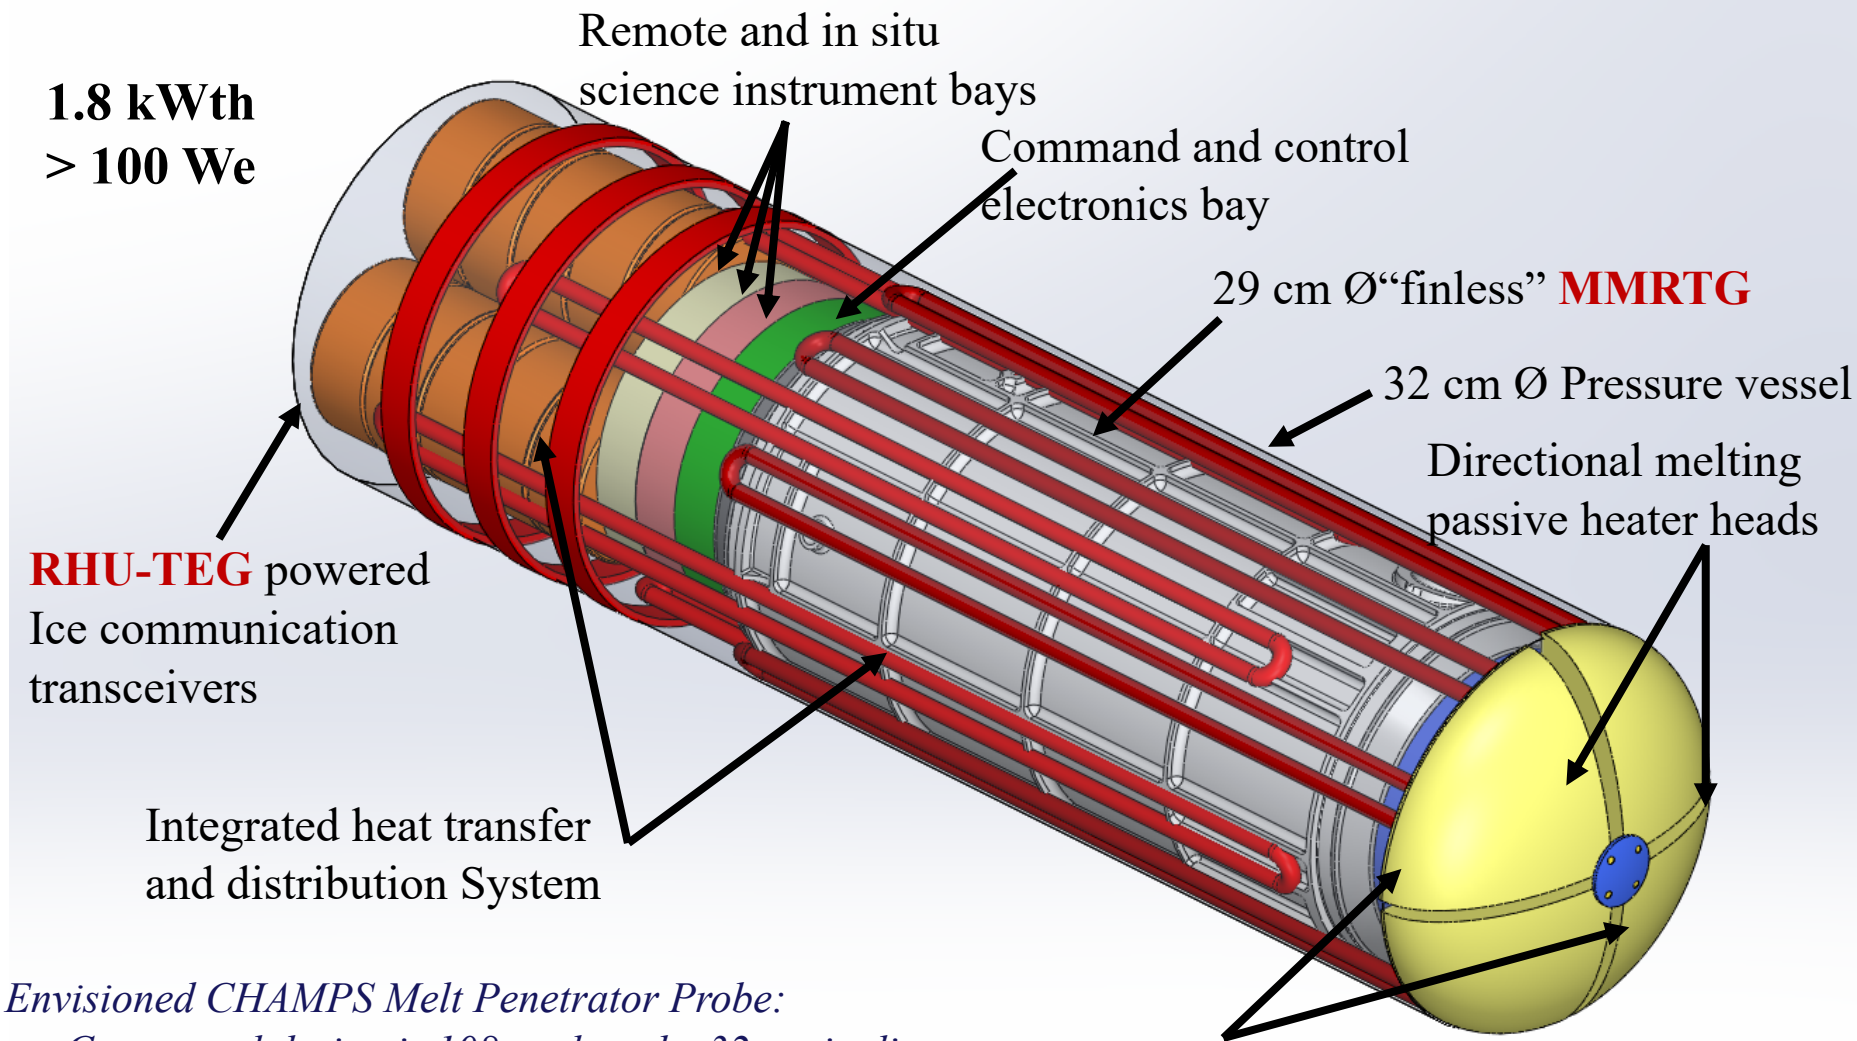

Envisioned CHAMPS Melt Penetrator Probe:

- *Conceptual design is 108 cm long by 32 cm in diameter*
- *Finless MMRTG within pressure vessel*
- *Includes 15 discrete ice transceiver "pucks" self-powered thanks to a 3-RHU mW-RTG delivering more than 100 mW*

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Latest CryoProbe Design Using Advanced Heat Source Concept

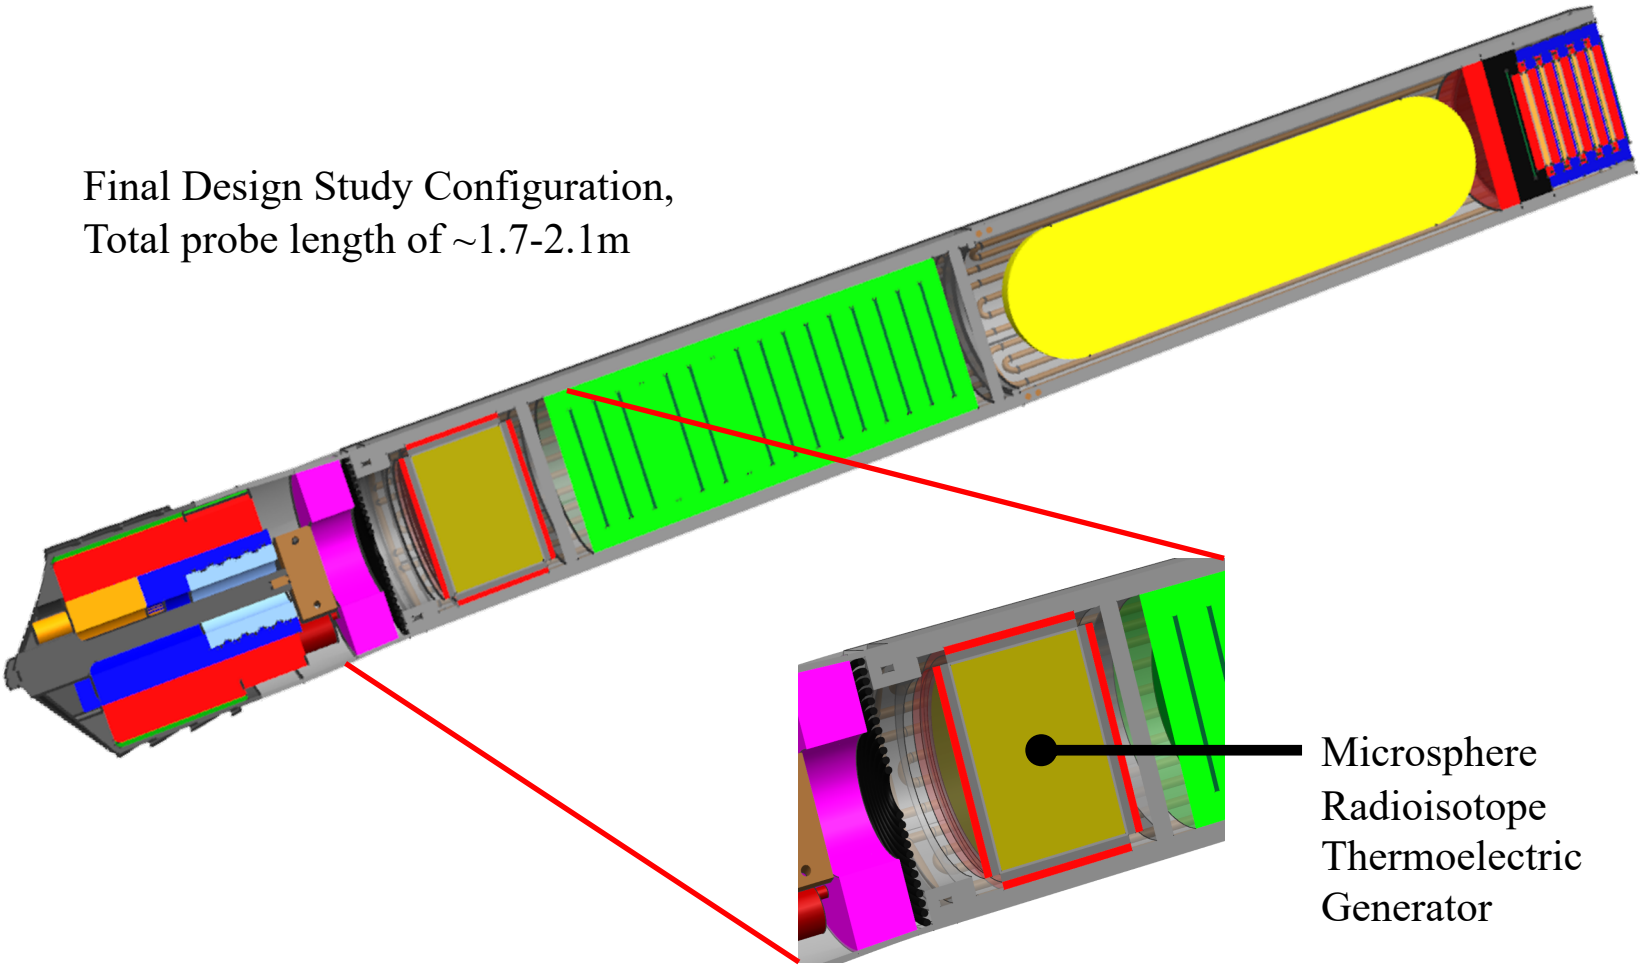

JPL/CIT Competition
Sensitive

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Advanced High Thermal Density Heat Source Concept

- This configuration provides 7-7.5kW thermal
- 2.7 – 3.2 W_{th} / cc
- Equivalent to stack of 28 GPHS modules that is 163cm X 9.96cm X 9.32cm
- GPHS: 0.46 W_{th} / cc

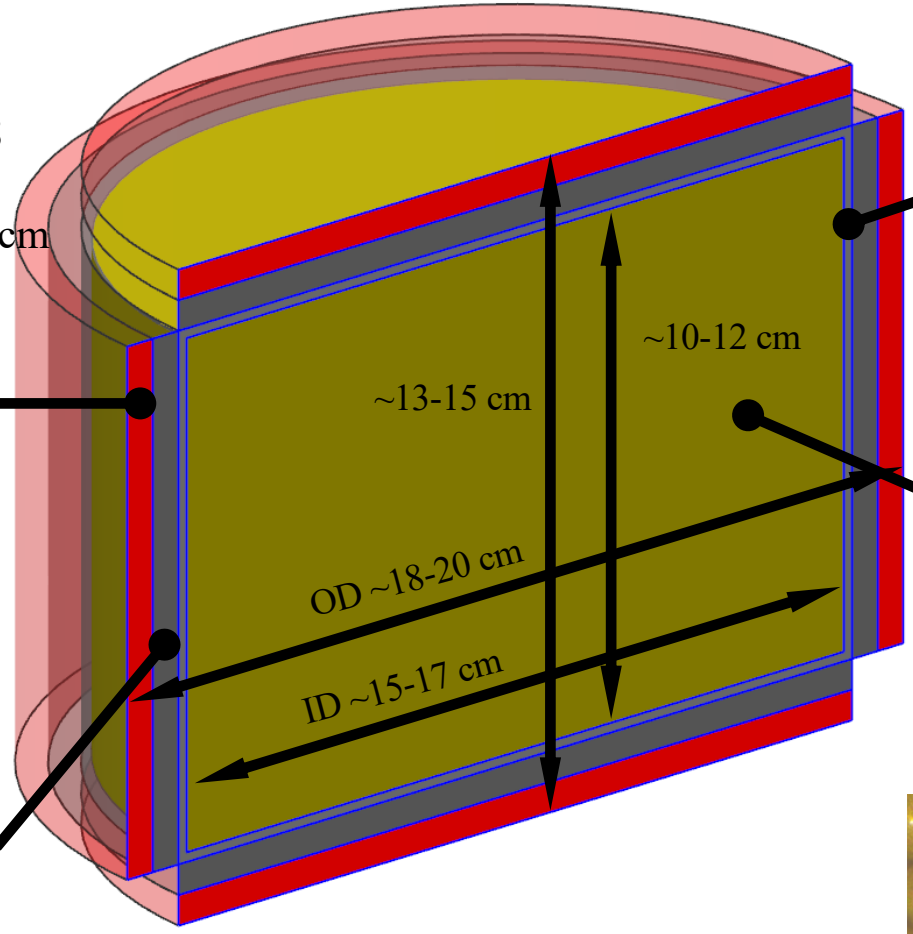

7.24mm Fine-Weave Pierced Fabric, All Around (GPHS Aeroshell Heritage)

Three-segment Thermoelectric Converters: 2X ZINTL, 1X BiSbTe T_{hot} ~1000 C, T_{cold} ~ 50 C, η_{TE} ~ 15 %

Dual Size Plutonium Dioxide Microspheres (60-70% Fill Factor), Individually Encapsulated

Thermal Conducting Graphite Fibers (Also provides structural support)

~250 um diameter microspheres

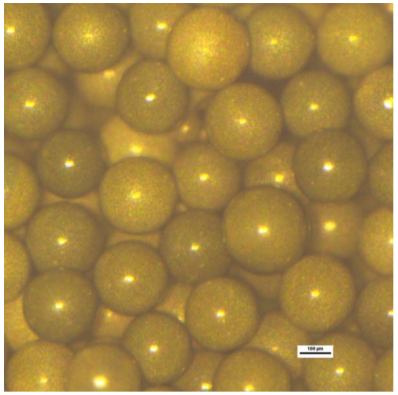

Pre-decisional information for planning and discussion only.

Ice Penetration Probe Designs
Thermal Modeling Introduction

Model description

- CFD Analysis of passive (purely conductive) and active heating (waterjets)
- Software used: Star CCM +
- Multiphase Model –H2O
- Laminar Flow

Analysis assumptions

- Variable Thermal Conductivity, C_p, density
  - Consistent with Atelier study
- Static Pressure- 560 psi. Assumed at a depth of 3 km.
- Model of stationary probe only

Ice and probe properties

- Ice Temperature: 160K
  - Ice temperature chosen at 3km depth of ice. At shorter depths, the main method used will be mechanical drilling due to porosity and sublimation
- Probe tip Heat source: 1kW
- Probe walls Heat source: 7.5kW
  - 7kW base from Atelier case
  - Assume constant heat across walls from internal 2 phase pump system
- Comm pucks Heat source: 1.25 KW

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Initial Preliminary Probe Designs

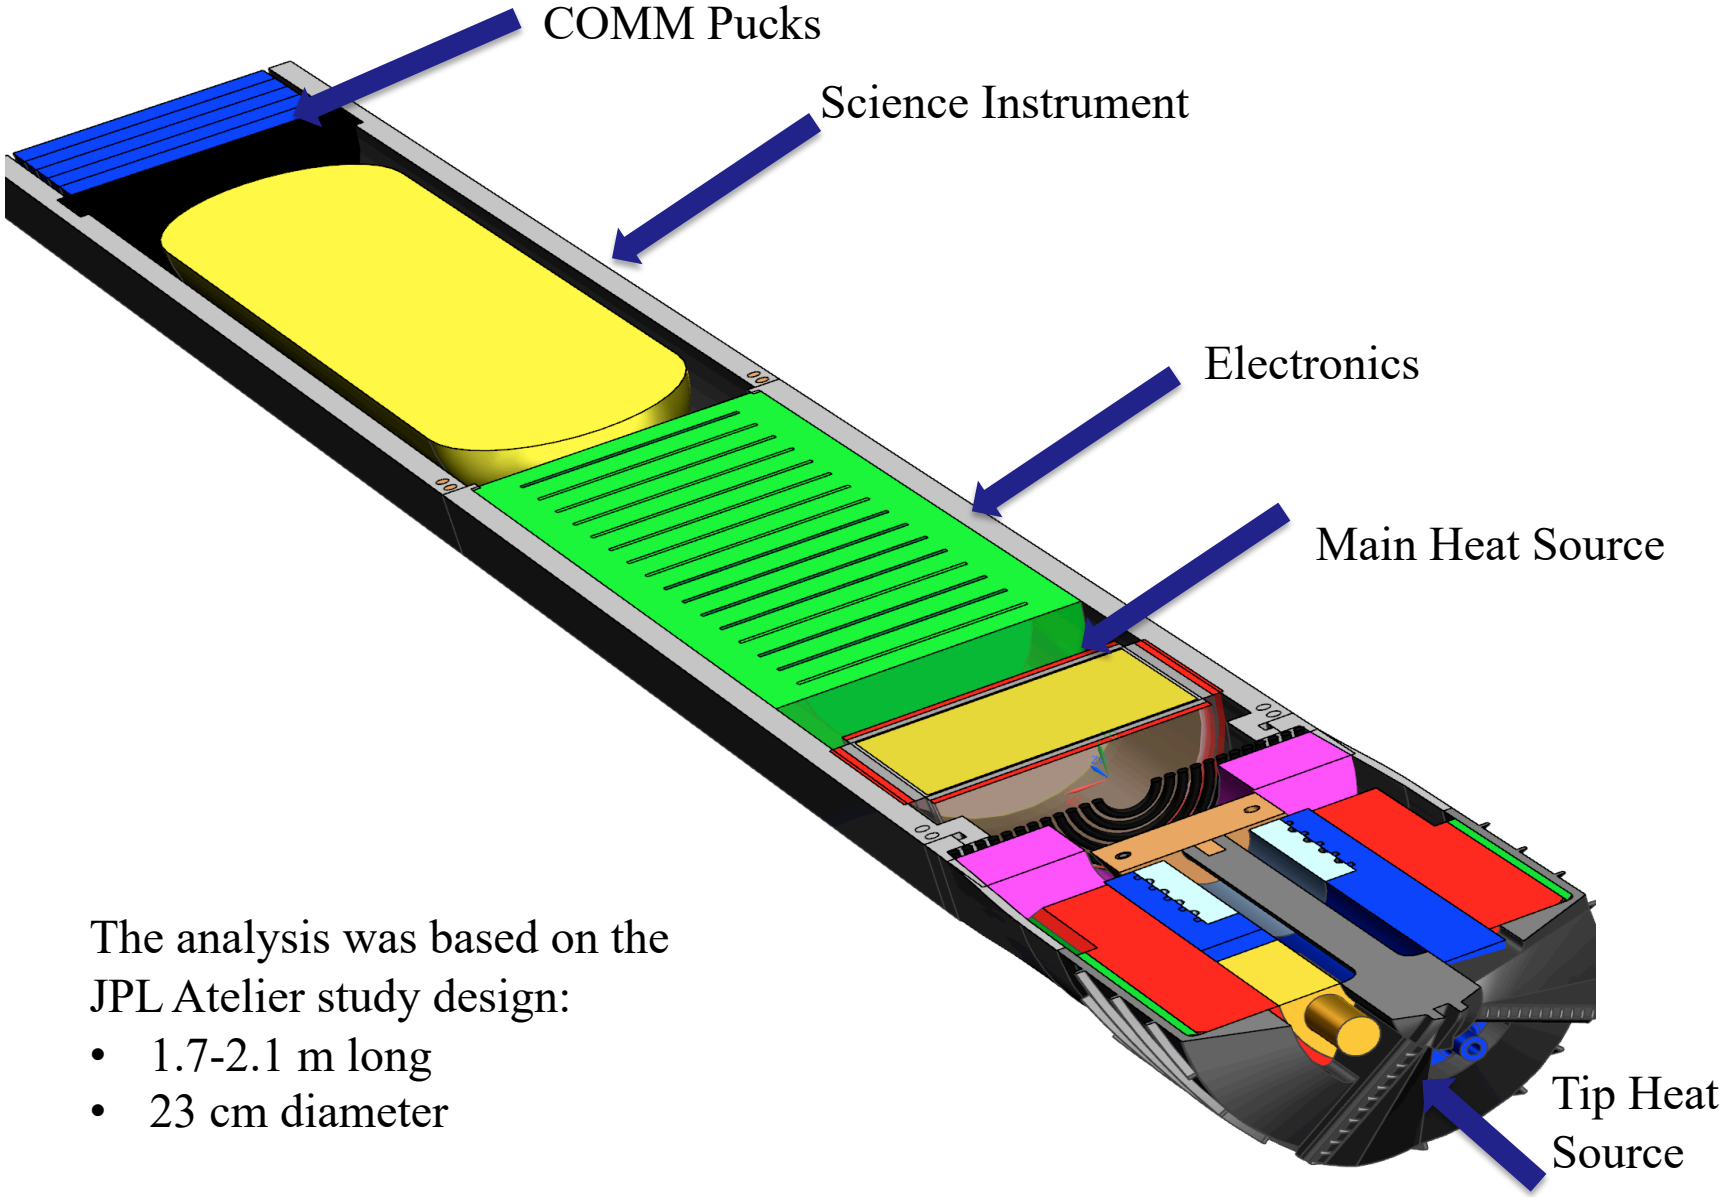

The analysis was based on the JPL Atelier study design:

- 1.7-2.1 m long
- 23 cm diameter

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Descent velocity approximation for passive heating

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Approach:

- Base rate of decent on velocity of receding liquid/solid ice interface.
- The liquid/solid interface will recede at different rates depending on distance from probe.
- Use rate of recession at the point in time when liquid layer rounds the bottom corner of the probe, and is fully formed along the sidewalls.
- At this point an actual probe would sink into the liquid water, pushing it out behind it.
- Probe walls Heat source: 7.5KW
- Heat Source at tip- 1 KW

- **Resulting Approximate Descent velocity: 9 cm/hr**

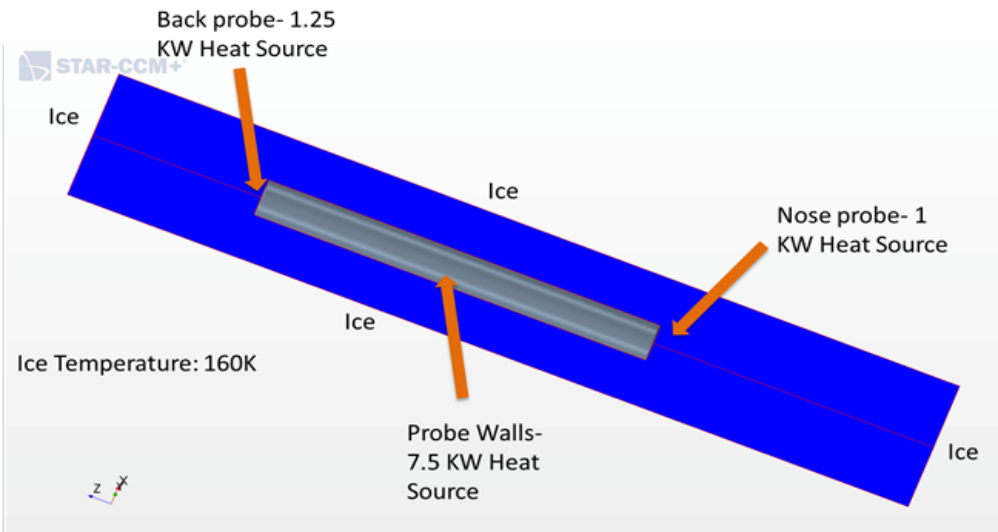

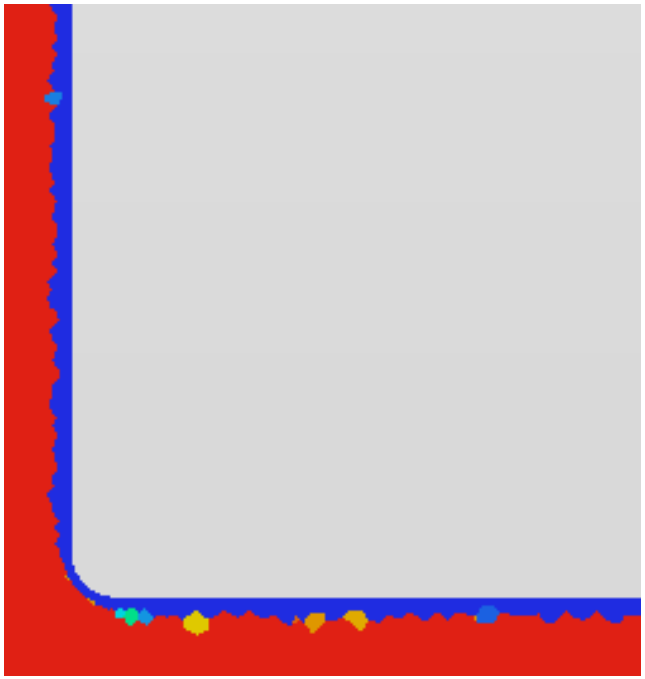

Courtesy: Nataly Brandt, Juergen Mueller

Directing more Heat to the tip

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Heat at Tip	Melted ice in 5 min	Approx descent rate
1KW	7.6 mm	9.1 cm/hr
3KW	11 mm	13.2 cm/hr
5KW	15mm	18 cm/hr

3KW at Probe tip

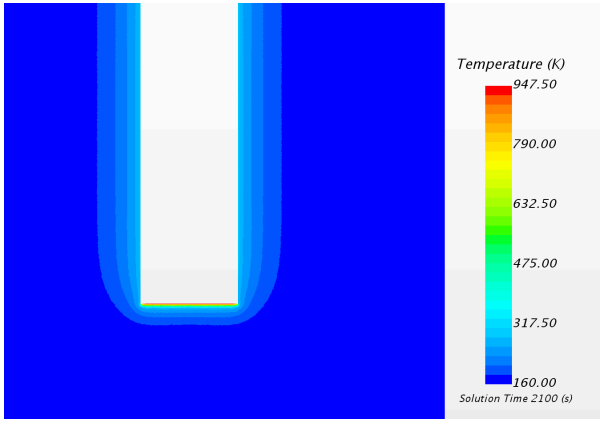

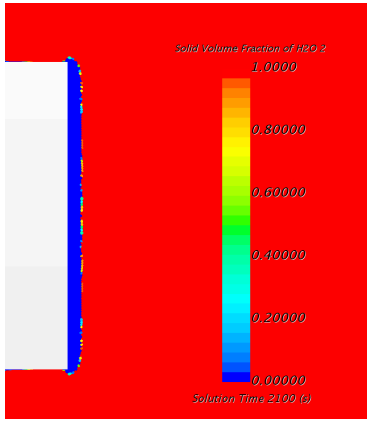

5KW at Probe tip

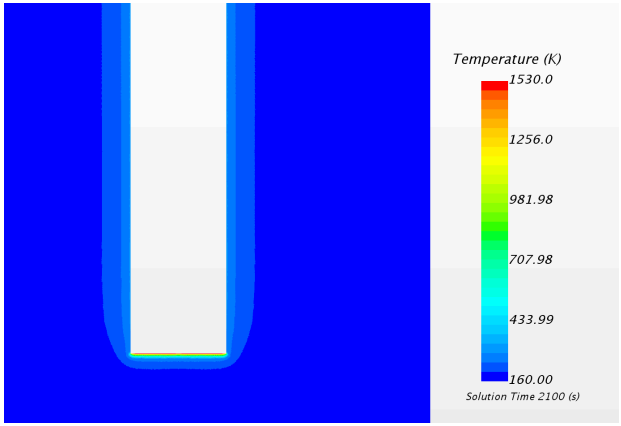

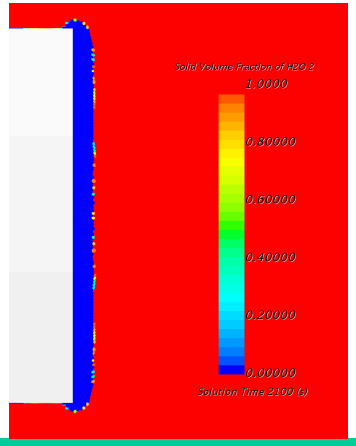

Courtesy: Nataly Brandt, Juergen Mueller

Melt rate is still not comparable to Water jets at 54cm/hr

Active Waterjet Configurations More Effective Location Comparison

Courtesy: Nataly Brandt, Juergen Mueller

- Water jet flow rate = 0.8 liter/min
- Water jets locations at 0.75 in, 1.25 in and 1.5 in from center

Location	Melt rate calculated at highest Δz	Melt rate calculated at lowest Δz
1.25 in	144 cm/hr	**54 cm/hr**
0.75 in	156 cm/ hr	**44 cm/hr**
1.75 in	Created difficulties around the corners. In reality, the water cannot go around the probe corners at these velocities, creating a Pressure build up at the tip pushing the probe back.	

- Active feeding achieves about 6-9 times the descent rate of the passive heating
- Could be higher once optimized

Water jet flow rate	Melt rate calculated at lowest Δz
0.8 liter/min	**54 cm/hr**
1 liter/min	**78 cm/hr**
passive	**9cm/hr**

When the water jets are closer, the highest Δz > farther water jets. However, the probe would still be slower because of the melt rate at the edge of the probe

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Active WaterJet Melting

Ice- 240 K

200 K | 240 K

Liquid layer at 15 s

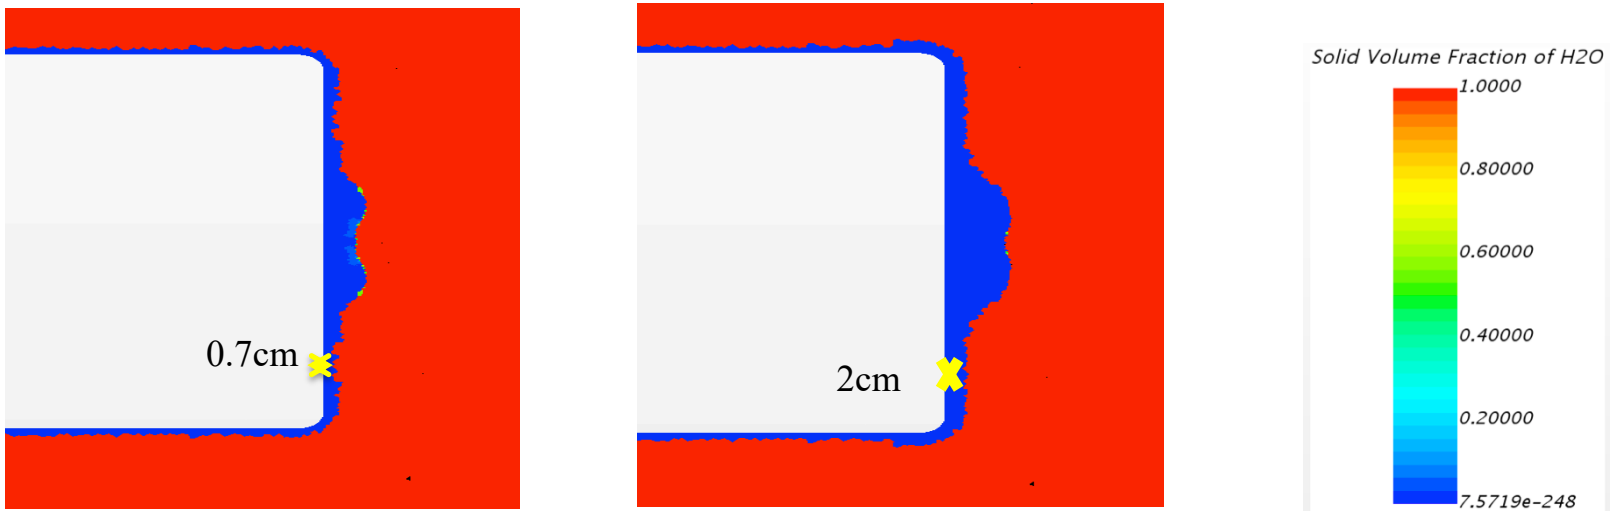

Ice Temperature	Δz (min)	Δz (max)	Melting rate (min)
200 K	0.7 cm	2.3 cm	168 cm/ hr
240 K	2 cm	7.5 cm	480 cm/hr

Courtesy: Nataly Brandt, Juergen Mueller

Melting rates at 200K and 240K are 168 cm/hr and 480 cm/hr

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

Summary

- Ice Penetration on Europa and Enceladus is Extremely Challenging
  - Temperature Conditions
  - Thermal Energy Requirements
  - Probe Size Limitations
  - At Least 3 Distinct Penetration Phases Identified:
    - Initial Start Phases – First Few 10's of Meters, Very cold, Very hard ice
    - Up to 3 km of depth – warmer, but still cold
    - Slow down phases as you reach ice / ocean interface
- Combination of Mechanical Drilling, Waterjet Melting and Passive Melting Required
- New RTG Designs Required to Deal with Large Temperature Differentials in this Application
- Requires New Heat Sources Designs with much Higher Thermal Dissipation Density
    - GPHS: Low Thermal Dissipation Density leads to large probe dimensions
    - New Microsphere-Based Heat Source Designs much more promising

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.

ACKNOWLEDGMENTS

This work was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract to the National Aeronautics and Space Administration.

The author acknowledges and offers his sincere Thanks to Nataly Brandt, Juergen Mueller, Bill Nesmith, and Knut Oxnevad (All at Jet Propulsion Laboratory) for their valuable inputs and contributions to this presentation.

Pre-decisional information for planning and discussion only. © 2018 California Institute of Technology. Government sponsorship acknowledged.