



RADIOISOTOPE POWER SYSTEMS

Mission Analysis for Next-Generation RTG Study

Brian Bairstow

Systems Engineer, RPS Mission Analysis
Jet Propulsion Laboratory, California Institute of Technology

Young Lee, Knut Oxnevad

3/5/2018

POWER TO EXPLORE

Next-Generation RTG Study

- The Next-Generation RTG Study was carried out in 2016-2017 to determine the characteristics of options for a new RTG that would best fulfill NASA Planetary Science Division (PSD)'s upcoming mission power needs, examining the applicability to various exploration targets and mission class and types
- The RPS Program Mission Analysis Team supported the study by examining the applicability to various exploration targets and mission class and types
 - Identify draft NASA Planetary Science Division (PSD) mission requirements
 - Examine the existing PSD mission concepts to various destinations across the solar system, mission concepts studied by various organizations and missions flown
 - Assess the mission impacts to a notional Next-Generation RTG power system


Prioritized RPS Concepts

- The mission analysis team started by looking at the high-priority mission concepts from the Planetary Science Decadal Survey (PSDS) and recent announcements
 - 4 Flagship missions
 - 3 New Frontiers mission
 - No priorities specified for Discovery

High-Priority Flagship Mission Concepts


Priority	Name	Power Source	Power Level (We)
1	Mars 2018 MAX-C Rover	Solar	~600
2	Jupiter Europa Orbiter	Solar	~500
3	Uranus Orbiter and Probe	RPS	~375
4	Enceladus Orbiter	RPS	~480
5	Venus Climate Orbiter	Solar	?
Missions for Next Decade			
-	Titan Saturn System Mission	RPS	~750
-	Neptune System Orbiter and Probe	RPS	~750

New Frontiers #4 Focused Missions

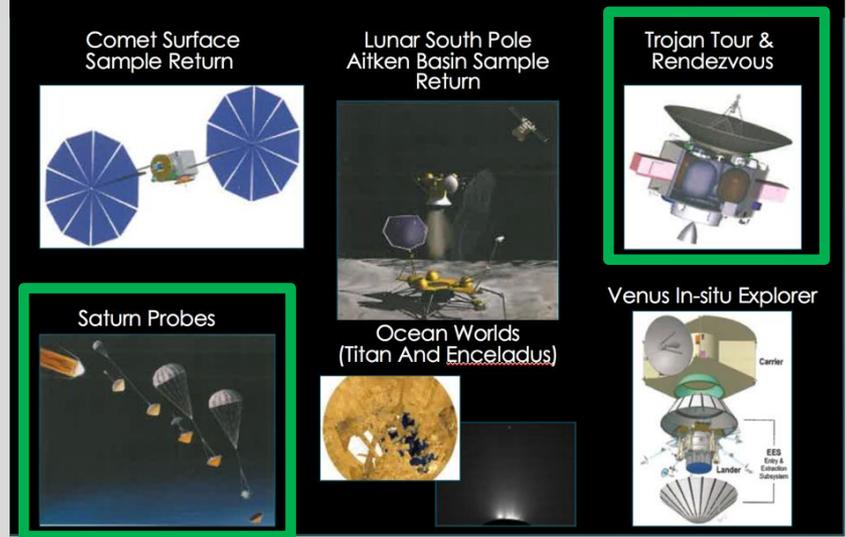


New Frontiers #5 Focused Missions

- Added to the remaining list of candidates:

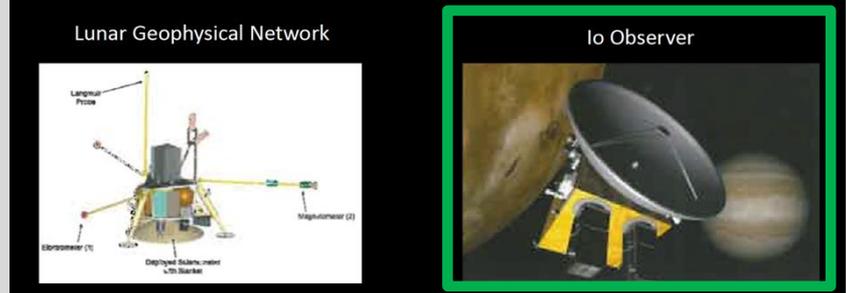

RPS Mission Concepts Analyzed

- The mission analysis team gathered RPS-powered mission concepts from several sources:
 - 2011 PSDS studies
 - RPS Program Mission Analysis studies
 - Curated data from the 2007 Discovery and Scout Mission Capabilities Expansion (DSMCE) studies
 - Data contributed for the 2014 Nuclear Power Assessment Study (NPAS)
 - Summary of RPS studies provided by Glenn Research Center (GRC) COMPASS Team
 - Summary of RPS studies provided of Goddard Space Flight Center (GSFC) Mission Design Lab
 - Other publically available mission concept studies conducted for NASA and flown and in-development missions

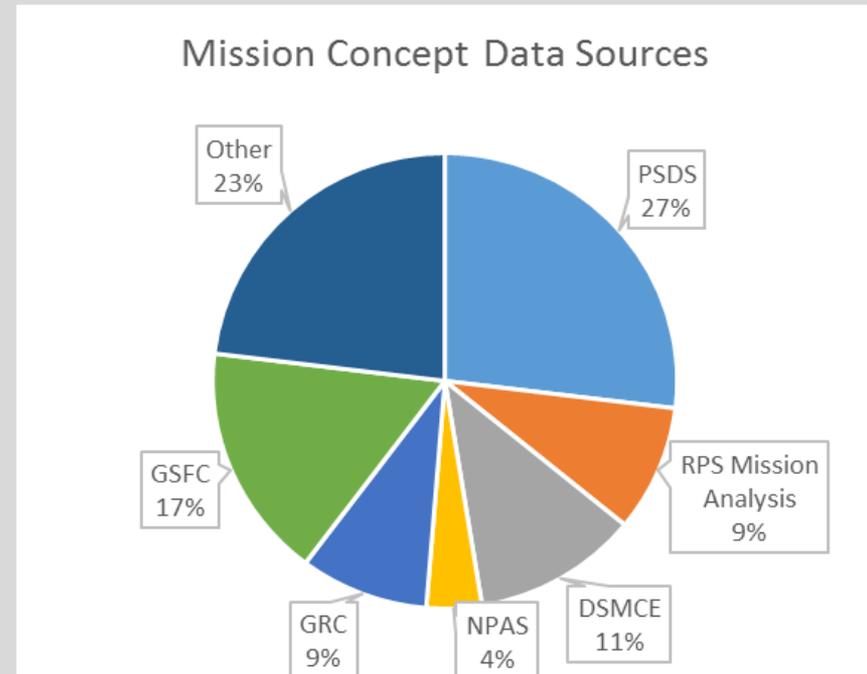

- In total, 77 RPS spacecraft and associated mission studies were evaluated and assessed for the Next-Generation RTG Study


Mission Analysis Database

- To perform the required analyses and to combine data and present the results in a unique way, an extensive relational database was developed
- The 77 RPS-powered mission concepts examined cover a range of targets, power levels, mission types, mission durations, and mission classes
 - These 77 flight systems performed a total of 125 “missions”, where mission is defined as a unique vector of spacecraft, mission type (e.g., lander) /subtype (e.g., rover), and target
 - For example, Cassini conducted flybys of Enceladus and 2685 Masursky, and orbited Saturn, which is considered three missions under this definition
 - Actual flown missions were also included in the database

Number of Analyzed Targets	63
Total missions used in this study	249
Flown missions reviewed in the study	124
Studied mission concepts in the study	125
Total missions used in this study	249
Flyby missions (flown and studied)	102
Orbiter missions (flown and studied)	72
Atmospheric probe missions (flown and studied)	10
Aerial missions (flown and studied)	4
Surface missions (flown and studied)	54
Subsurface missions (flown and studied)	1
Sample return missions (flown and studied)	6

Sample Database Entry

Io Io Observer



Characteristics

<u>Mission Type</u>	Flyby
<u>Mission Class</u>	New Frontiers
<u>EOM Power (W_e)</u>	370
<u>Power Source</u>	ASRG
<u># Units</u>	2
<u>Status</u>	Studied
<u>Launch Date</u>	6/1/2021
<u>Launch Vehicle</u>	Atlas V 401
<u>Mission Life (y)</u>	8.5
<u>Science Duration (y)</u>	2.0
<u>Vehicle Dry Mass (kg)</u>	821
<u>Payload Mass (kg)</u>	49
<u>Propulsion System</u>	Chemical

Science Goals

Test and revise models for active volcanic processes on Io.
Determine the state (melt fraction) of Io's mantle.
Test and revise models of tidal heating mechanisms.

Destination(s)

	Jupiter
	Io

Payload

NAC
Ion and Neutral Mass
Spectrometer
Thermal Mapper
Fluxgate Magnetometers

Data Source PSDS Study

Study Date 5/1/2010

Study CML 4


Organization JPL

27

The technical data in this document is controlled under the U.S. Export Regulations. Release to foreign persons may require an export authorization.

Mission Concepts by Destination

- The 77 RPS-based mission studies examined for this analysis cover a range of targets and power levels
 - Titan missions are broken out from the other Saturn system missions, due to the unique environment and high interest

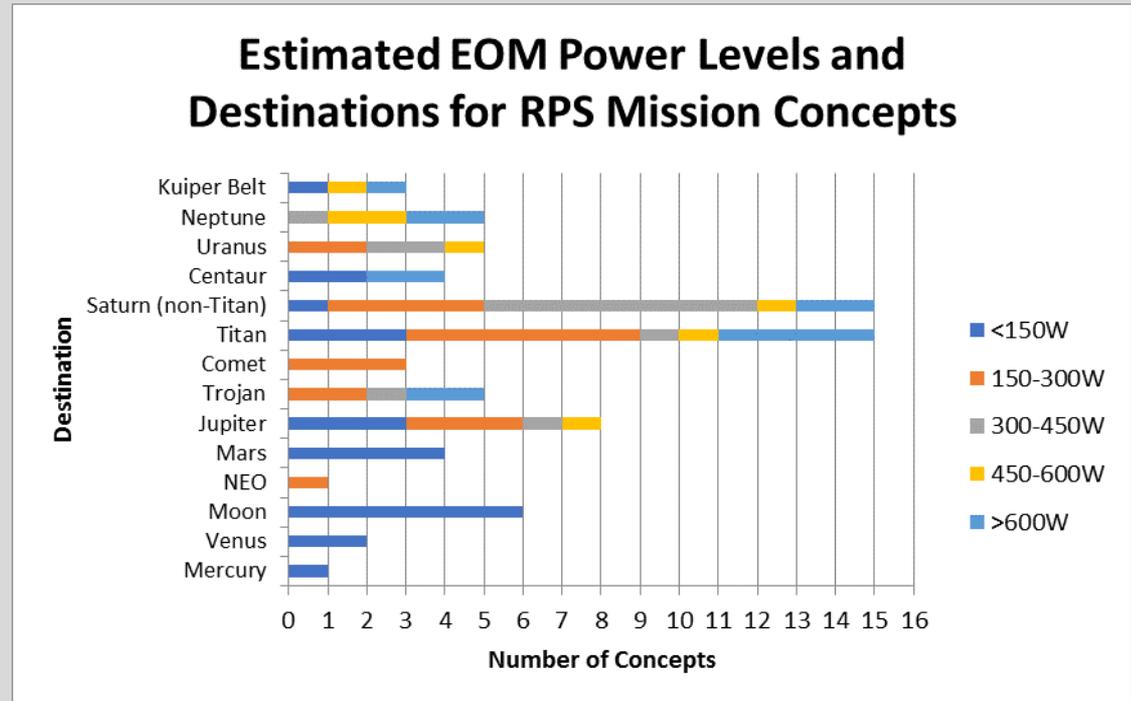

- Altogether, 30 Saturn system mission concept studies were reviewed
 - Missions to targets closer than Saturn can often be accomplished using solar power
 - Missions to targets farther than Saturn have challenges including:
 - Constrained launch masses
 - Limited data return
 - Need for large delta-Vs
 - Long travel times causing degradation in power output


Mission Concepts by Mission Class

- The 77 RPS-based mission studies can also be sorted by mission cost class


- Discovery-class missions are extremely resource-constrained, making them especially sensitive to mass and power generation values for RPS units

- New Frontiers-class missions are also resource-constrained, though not so much as Discovery-class missions
- Flagship-class missions generally need more power to operate ambitious investigations with large payloads and high data return requirements

- Nearly half of the mission concepts that could require RPS are in the flagship class, which reflects the challenges in accommodating RPS

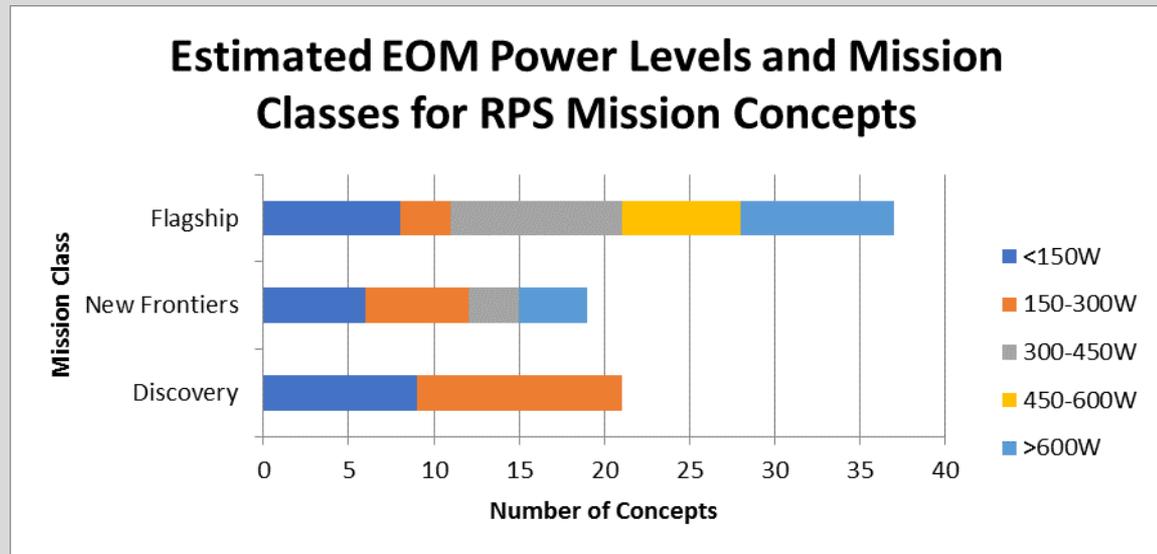


Mission Concepts – Distance and Power

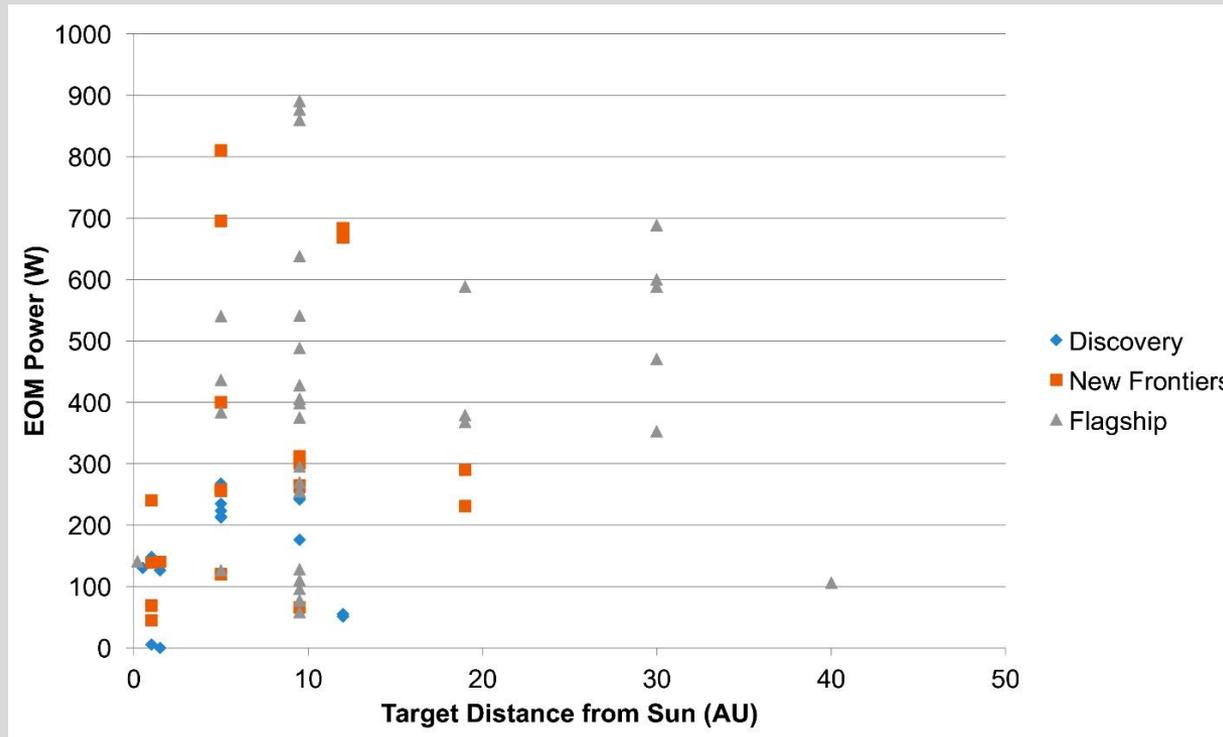

- Discovery-class RPS missions go as far as 12 AU (a Centaur SmallSat study), and generally tend towards lower Sun-spacecraft distances
- The New Frontiers-class RPS missions do not make it past 19 AU (Uranus)
- 60% of studied missions have power needs $<300 W_e$ EOM
- 77% of studied missions have power needs $<550 W_e$ EOM
- 92% of studied missions have power needs $<820 W_e$ EOM

Studied Missions – Types by Destination

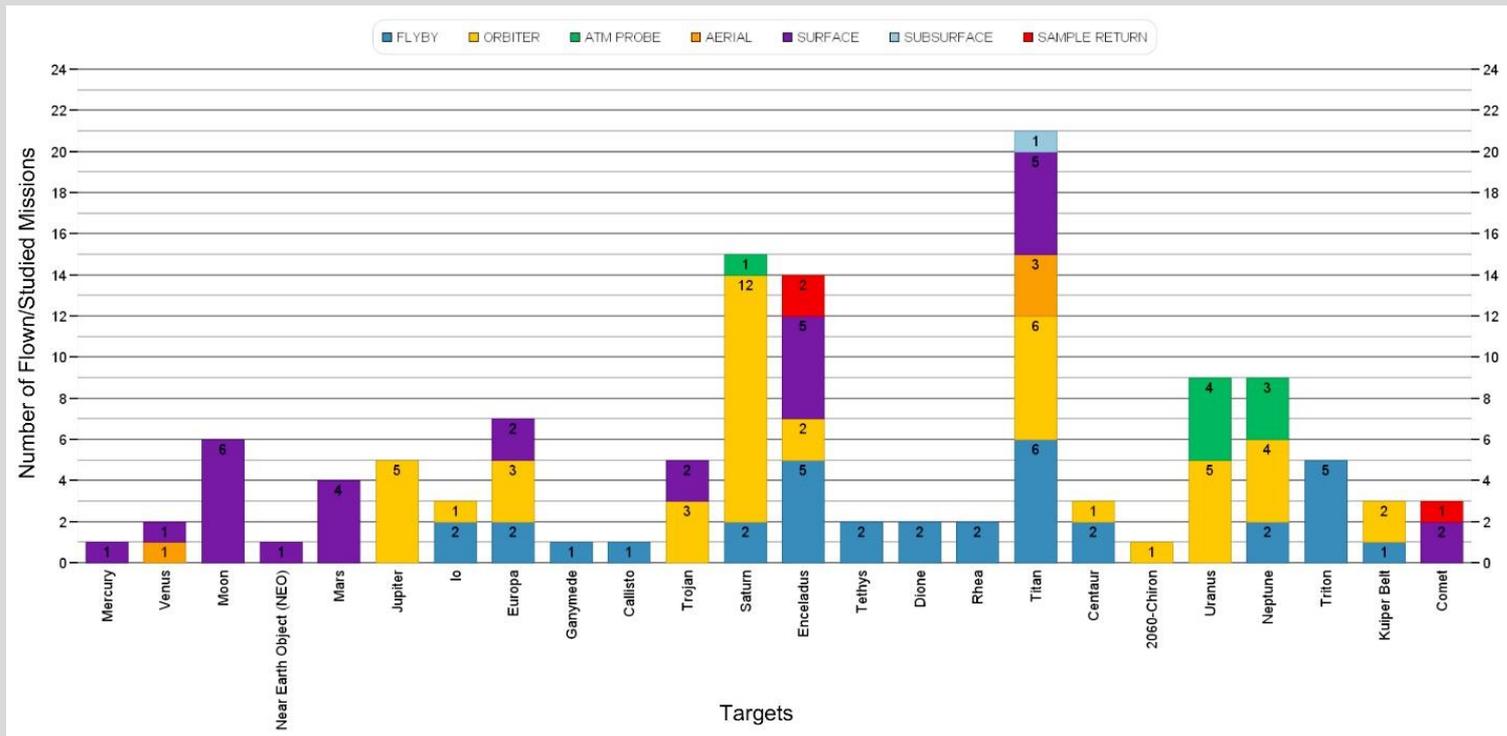

- The chart includes secondary targets for a total of 125 studied missions
- Mostly surface mission concepts for destinations < 5 AU from the Sun
 - Orbiter/flyby missions could generally use solar power
 - Landed missions may not be able to use solar power due to shadowed regions, atmospheric conditions, or long night times or where carrying solar arrays may make a mission impractical
- There is also significant interest in Enceladus and Titan lander missions
 - Titan stands out in general, with interest in flybys, orbiters, and in situ missions exploring Titan’s atmosphere, surface, and lakes

Requirements Findings – Power

- Power needs for the studied spacecraft and associated missions range from less than $10 W_e$ to more than $1000 W_e$ at EOM
 - 60% of the missions have power needs below $300 W_e$ at EOM, 77% below $550 W_e$ at EOM, and 92% below $820 W_e$ at EOM
- To serve all reasonable mission concepts with one unit, a Next-Generation RTG would have to produce $820 W_e$ total at EOM
 - This unit would be too large and massive for most missions requiring less power
- A Next-Generation RTG producing 200-300 W_e total at EOM could meet most mission power needs with 4 or fewer total units
 - Flying multiple units comes with a penalty to mass and complexity of configuration and integration
 - 200-300 W_e would still make for large, discrete steps in generated power
- A modular Next-Generation RTG could be procured in a variety of sizes more closely matched to the power needs of the greatest number of missions

Requirements Findings – Mission Length

- The existing MMRTG has a requirement to operate for 17 years once fueled
 - With a storage period of up to three years before liftoff, this translates into a flight life of 14 years
- Of the missions studied, 70% have a flight lifetime less than this.
 - The longest mission concept has a flight lifetime of 19.4 years
- Since mission flight durations are expanding (for instance for ice probes), Next-Generation RTGs should consider total operational lifetimes of 20–24 years
 - Should not be a major design obstacle as RTGs are given to graceful degradation
 - Could require additional testing and qualification of the thermoelectric couples and materials (e.g. insulation)
 - Development cycle could take longer due to testing

Requirements Findings – Environment

- Of the 77 studied RPS-powered mission concepts:
 - 40 are flybys and orbiters, requiring a power system that only needs to operate in the vacuum of space
 - 37 are aerial, surface, subsurface, and sample return mission types
 - 16 of these are to targets with an atmosphere
 - 21 are to targets without an atmosphere
- This means that nearly 80% of the missions studied only need a power system that can operate in the vacuum of space
 - Next-Generation RTG would be very similar to a GPHS-RTG in this regard
 - A pressure vessel would be a potential solution to use Next-Generation RTG at a destination with an atmosphere or for subsurface exploration



Conclusions

- The RPS Program Mission Analysis Team gathered 77 RPS-powered mission concepts
- These mission concepts were used to determine which potential RPS concepts would be applicable to many future missions, using the missions' power levels as inputs for the analysis
- The mission analysis work helped define the preliminary requirements documented in the Next-Generation RTG Study final report

Questions?

